

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

00059

NLI 109572

12


Form No. 41-25 Quantity 100 Delivered 100 Manufactured by 100 Purchased 100 Total cost 100		
DRIVE EYE EXPANSION BOLT		
NATIONAL LEAD CO.		

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed


00059

NLI 109573

12

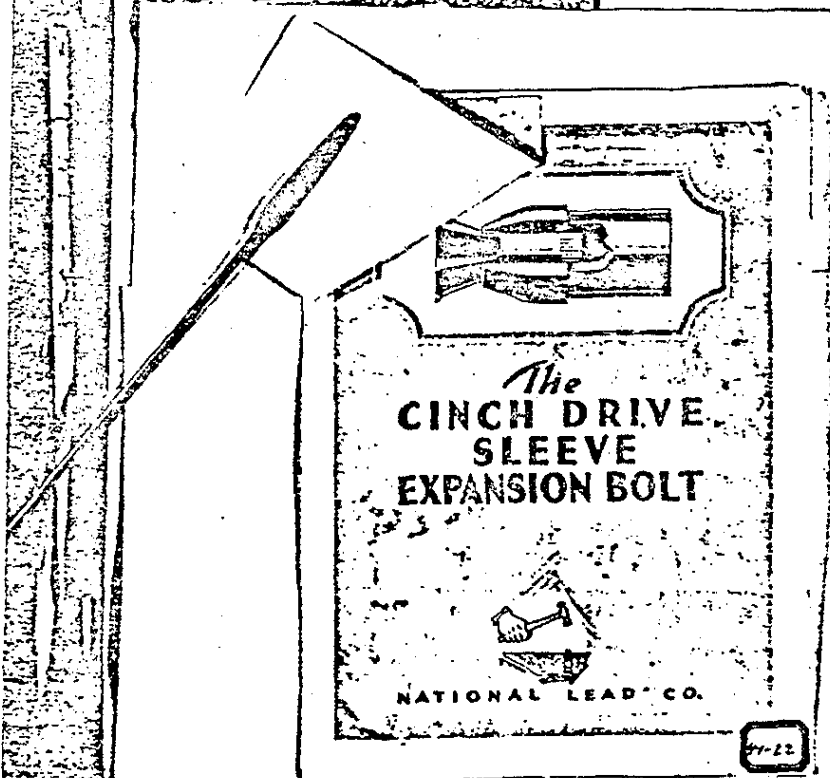

The CINCH DRIVE SLEEVE EXPANSION BOLT

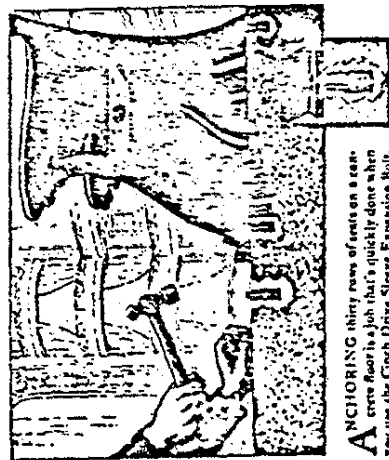

ANCHORING thirty rows of seats on a concrete floor is a job that's quickly done when you use the Cinch Drive Sleeve Expansion Bolt.

Your man takes a handful, drops them one by one into holes drilled for the purpose, says each one with a hammer several times and they're in, so much so, that a hundred audiences a day could not budge them. And that's all there is to it.

The anchor consists of three simple parts—an extension threaded male cone, an expanding unit made of special lead alloy and hard metal sleeve



which comes snugly fitted over the extension of the cone. The sleeve serves as a driving tool and thus helps you to finish a job with dispatch. A few hammer blows on the sleeve expands the lead alloy over the cone and solidly into the hole. The sleeve becomes part of the anchorage and is left flush with the face of wall.

In the electrical field both types shown here are invaluable for fastening conduit, outlet boxes and black wiring—without the need of panel work and cable racks.

No lengthy explanations—no special tool is needed. These anchors are installed as quickly and simply as driving a nail.

Their tensile strength is further increased by a patented rim or collar on the base of the cone. The alloy cannot be forced over it. This makes it so impossible for a load to pull the cone thru the alloy as it would be for you to pull the wide end of your collar button thru its button hole.

Another point: The cone does not gradually taper to its narrower end but reaches it by a sharp angle. This has been definitely proved to considerably increase the holding power of the anchorage. This principle of the cone is found only on bolts manufactured by National Lead Company.



TYPE 12
SEE FIG. 12


NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

00059


NLI 109574

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

12

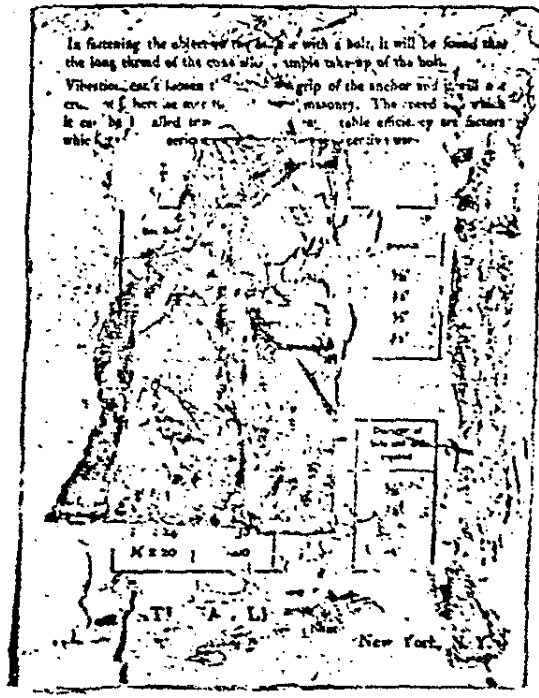

00059



NLI 109575