


BELMONT PACKINGS for WATER...STEAM...OIL...

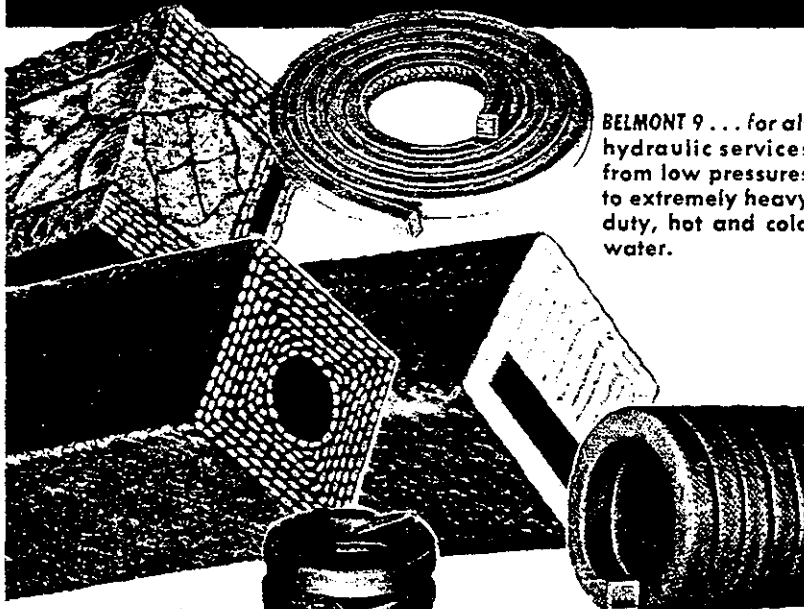

BELMONT 9... for all hydraulic services from low pressures to extremely heavy duty, hot and cold water.

BELMONT 19... for hot and cold water rods and plungers; low and intermediate steam rods.

BELMONT 30... for high pressure steam rods, expansion joints, air, and gas.

for better sealing—LONGER

Regardless of the temperatures or pressures involved... no matter what the loading... your equipment maintenance costs can benefit from longer, more dependable packing life. If you're paying for the best—and you probably are—make sure you get it by specifying BELMONT Packings in formulations suited to your particular needs.



Don't make do with the next best—insist on BELMONT... available in a wide range of materials... hundreds of styles and types... through distributors everywhere. When it SEALS right—stays TIGHT... you know it's Belmont made.

CLIP and Send Coupon 4-R-5

BELMONT PACKINGS

Butler & Sepviva Streets

Philadelphia 37, Pa.

☐ Crisscross
☐ Braid Folder

Without obligation—send us information as checked:

☐ #54 Condensed
Catalog

Name _____ Title _____

☐ #40 Catalog

Company _____

☐ SEND NAME and ADDRESS of NEAREST BELMONT DISTRIBUTOR

Address _____

City _____ State _____




More EQUIPMENT NEWS

Begins on page 16

of inner cylinder. There it exerts pressure against floating aluminum piston. Constant pressure of gas against piston forces it against oil that enters pressure balanced inner shell from main hydraulic line. Pressure of working medium in outlet line is thereby maintained at constant pressure. Unit eliminates necessity of a compressor.

These accumulators are designed for 2000 psi and will deliver 2310 cu in. of oil with pressure drop of 10% and hold a net gas capacity of 21.950 cu in.

Superior Hydraulics div, Superior Pipe Specialties Co, 15201 St Clair Ave, Cleveland 10, Ohio

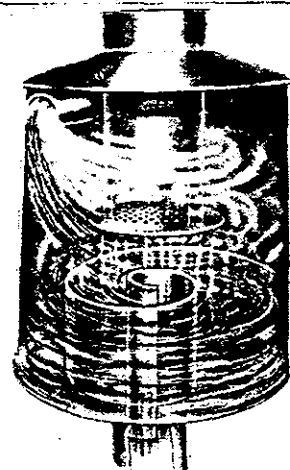


Clean steam separator

324 • Non-pressure type all-steel welded vessel provides quiet method for separating flash from water and sludge. Blow-down enters tangentially at top periphery. An internal spiral baffle, extending into drain, assists swirling action. Solids fly outward and down—only clean flash is vented to steam line. Taper design aids separation while keeping water-sludge "momentum pressure" on drain. Unit serves one or more boilers. Details on request.

Pennsylvania Separator Company, Box 348-1, Brookville, Pa.

For more data on these items, use post cards p 175. Identify your request with item number.

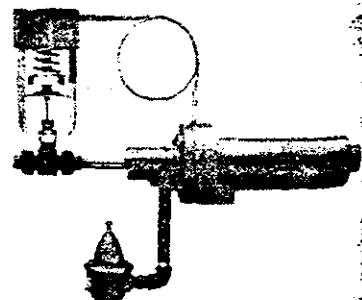

Steam and water mixer

326 • Mixer may be used wherever hot water is required and where steam and water are available. Unit utilizes full heat steam directly into the water. Mixer is designed to pre-

PLAINTIFF'S
EXHIBIT
G-88