



THICK BLOKS and TAPERED BLOKS

Specifications Arranged by Width for Identifications, Refer to Block Diagrams.

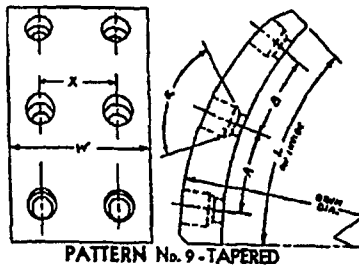

PATTERN No. 9 - TAPERED

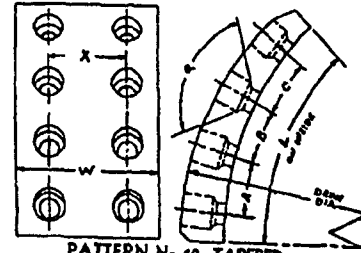

PATTERN No. 10 - TAPERED

Pattern No.	Drum Diam.	W	X	Y	L	A	B	C	D	E	F	Counter-bore Angle	ABB-FMS Set No.
7" Width													
9	16 1/2	7	5 1/2	-	8 1/4	3.809	3.003	-	-	-	-	-	
9	18 1/2	7	5 1/2	-	8 1/4	3.770	2.862	-	-	-	-	82° CAM.	4358AD
9	18	7	5 1/2	-	7 1/4	2.520	2.520	-	-	-	-	82° ANC.	
9	18	7	5 1/2	-	7 1/4	2.520	2.520	-	-	-	-	82° CAM.	4471AD
9	18	7	5 1/2	-	7 1/4	2.520	2.520	-	-	-	-	82° ANC.	
4" Width													
10	15	4	2 1/2	-	7 1/4	2.525	2.525	1.138	-	-	-	150°	4610D
10 (4 pcs.)	16 1/2	4	2 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	150° CAM.	4548D
10 (4 pcs.)	16 1/2	4	2 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	150° ANC.	
10 (4 pcs.)	18 1/2	4	2 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	82° CAM.	4548AD
10 (4 pcs.)	18 1/2	4	2 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	82° ANC.	
10 (4 pcs.)	16 1/2	4	2 1/2	-	8 1/4	2.304	2.304	2.304	-	-	-	140° CAM.	4326D
10 (4 pcs.)	18 1/2	4	2 1/2	-	8 1/4	2.304	2.304	2.025	-	-	-	140° ANC.	
10 (4 pcs.)	20 1/2	4	2 1/2	-	9 1/4	2.413	2.413	2.413	-	-	-	150° CAM.	4601D
10 (4 pcs.)	20 1/2	4	2 1/2	-	9 1/4	2.413	2.413	2.413	-	-	-	150° ANC.	
4-1/2" Width													
10 (4 pcs.)	16 1/2	4 1/2	2 1/2	-	8 1/4	2.304	2.304	1.675	-	-	-	150° CAM.	4626D
10 (4 pcs.)	16 1/2	4 1/2	2 1/2	-	8 1/4	2.304	2.304	1.955	-	-	-	150° ANC.	
5" Width													
10	15	5	3 1/2	-	7 1/4	2.525	2.525	1.138	-	-	-	150°	4615D
10 (4 pcs.)	16 1/2	5	3 1/2	-	8 1/4	2.304	2.304	2.304	-	-	-	140° CAM.	4327D
10 (4 pcs.)	18 1/2	5	3 1/2	-	8 1/4	2.304	2.304	2.025	-	-	-	140° ANC.	
10 (4 pcs.)	16 1/2	5	3 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	150° CAM.	4524D
10 (4 pcs.)	18 1/2	5	3 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	150° ANC.	
10 (4 pcs.)	16 1/2	5	3 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	82° CAM.	4524AD
10 (4 pcs.)	18 1/2	5	3 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	82° ANC.	
5-1/2" Width													
10 (4 pcs.)	18 1/2	5 1/2	3 1/2	-	3 1/2	2.304	2.304	1.955	-	-	-	150° CAM.	4620D
10 (4 pcs.)	16 1/2	5 1/2	3 1/2	-	3 1/2	2.304	2.304	1.675	-	-	-	150° ANC.	
6" Width													
10	15	6	4 1/2	-	7 1/4	2.525	2.525	1.138	-	-	-	150°	4605D
10 (4 pcs.)	16 1/2	6	3 1/2	-	8 1/4	2.304	2.304	2.304	-	-	-	140° CAM.	4328D
10 (4 pcs.)	18 1/2	6	3 1/2	-	8 1/4	2.304	2.304	2.025	-	-	-	140° ANC.	
10 (4 pcs.)	16 1/2	6	3 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	140° CAM.	4514D
10 (4 pcs.)	18 1/2	6	3 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	140° ANC.	
10 (4 pcs.)	16 1/2	6	4	-	7 1/4	2.304	2.304	.977	-	-	-	140° CAM.	4514CD
10 (4 pcs.)	18 1/2	6	4	-	7 1/4	2.304	2.304	.977	-	-	-	140° ANC.	
10 (4 pcs.)	16 1/2	6	3 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	82° CAM.	4514FD
10 (4 pcs.)	18 1/2	6	3 1/2	-	7 1/4	2.304	2.304	.977	-	-	-	82° ANC.	
10 (4 pcs.)	16 1/2	6	3 1/2	-	8 1/4	2.304	2.304	1.675	-	-	-	150° CAM.	4627D
10 (4 pcs.)	18 1/2	6	3 1/2	-	8 1/4	2.304	2.304	1.955	-	-	-	150° ANC.	
7" Width													
10 (4 pcs.)	20 1/2	7	5 1/2	-	10 1/4	2.844	2.829	2.844	-	-	-	82° CAM.	4482AD
10 (4 pcs.)	20 1/2	7	5 1/2	-	11 1/4	3.188	3.188	2.585	-	-	-	82° ANC.	