
applic[illegible]


Demountable wall systems are installed with appropriate or approved color-matched moldings. Panels may be applied with G-P Drywall Adhesive directly to metal studs, wood framing or furring strips. For application directly to masonry walls, use G-P Grabit Masonry Adhesive.

[illegible]
and [illegible]
treatment






[illegible]
[illegible]
[illegible]

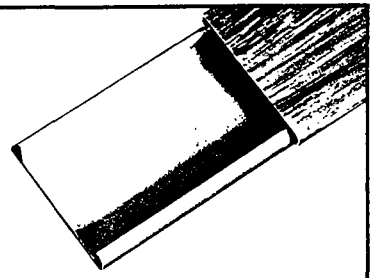

[illegible]
[illegible]
board

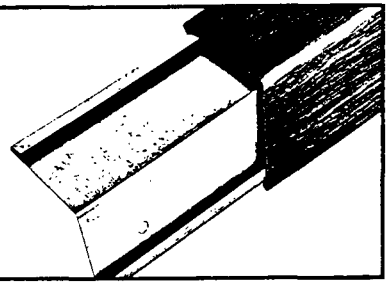


SGP 0026006

smooth surface system:

Georgia-Pacific Eternawall Smooth Surface System provides a continuous smooth surface appearance in a variety of colors and textures. Panels are 4' wide and ½" and ⅝" thick with either a regular or Firestop® gypsumboard core. Smooth Surface System is a special order product requiring 8 to 10 weeks delivery time.

This Eternawall system is suitable for installation over existing walls or application to wood or steel stud framing. Vinyl surfaced Eternawall is shipped from the factory with flaps on each edge. A special modified round edge, used in conjunction with fast setting G-P Speed-Set™ joint compound, results in a seamless appearance to the finished surface.

Factory laminated Eternawall saves field laminating.

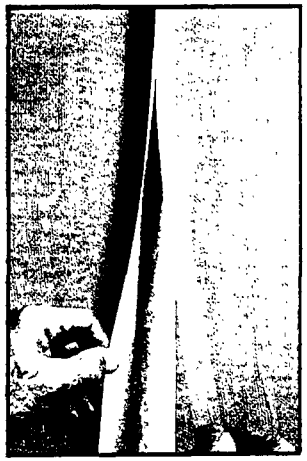



GeorgiaPacific

Gypsum Division, Portland, Oregon 97204

ET-60 10/71 10GAC

GeorgiaPacific


PLAINTIFF'S EXHIBIT

GP-1071

Eternawall™

vinyl surfaced gypsum wallboard

color selector

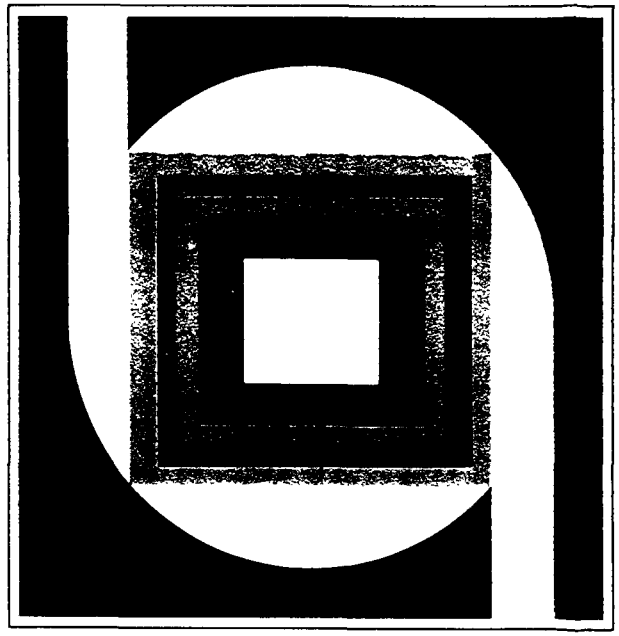

Eternawall color selector

NONCOMBUSTIBLE GYPSUM WALLBOARD COMBINED WITH THE BEAUTY OF VINYL.

THE INSIDE IS GYPSUM AND THAT MEANS:

1. Noncombustible
2. Dimensionally Stable
3. Fire Resistance Ratings
4. Sound Control
5. Structural Strength


THE SURFACE IS VINYL AND THAT MEANS:

1. Colorfast
2. Flame Resistant
3. Abrasion Resistant
4. Stain and Chemical Resistant
5. Damp cloth clean up

If you want all of these qualities in an easy to install panel—you want the Georgia-Pacific vinyl covered wall—**ETERNAWALL**™.


THE ONLY VINYL SURFACED GYPSUMBOARD WITH A CLASS A FLAME SPREAD RATING AND A [illegible] LABEL

Noncombustible Eternawall panels are factory laminated with a quality washable vinyl film. The vinyl provides a permanent scuff, crack, chip and fade resistant surface. This is a wall panel that really takes punishment and is designed for use in high traffic areas and for movable partitions. Installation experience has proven that vinyl surfaced gypsumboard is less expensive than regular gypsumboard with field applied vinyl.

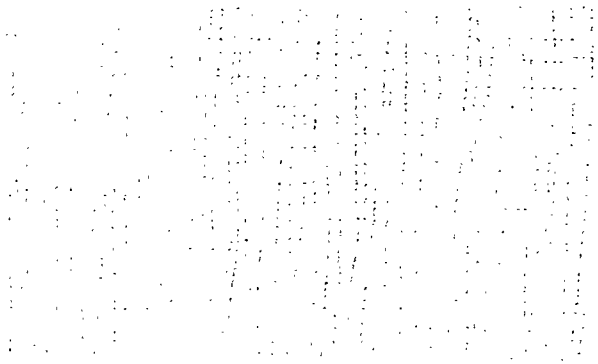


FLAX GP-688

SGP 0026007

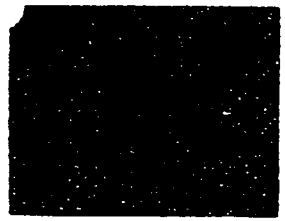


STUCCO GP-705

TANGERINE GP-702



WILLOW GREEN GP-701

ALABASTER GP-703



BUFF GP-704

CHERRY GP-681



PECAN GP-683

BEIGE GP-687



WHITE GP-686

AVOCADO GP-685

technical data

Standard panels are 4' x 8' or 4' x 10' with other lengths available on special order. Standard thickness is ½" with ⅜" or ⅝" on special order. The panels are easily field cut by scoring the vinyl surface and snapping the board.

Eternawall in partition constructions, will give the same fire resistance rating as the equivalent thickness and type of regular gypsum wallboard.

Fire Hazard Classification: Gypsum core wallboard surfaced on both sides with paper or with supported or unsupported vinyl film on one side.

	Without Vinyl Facing	*With Vinyl Facing*
Flame Spread	15	25
Fuel Contributed	15	10
Smoke Developed	0	20-50


Classified by Underwriters' Laboratories, Inc. Building Materials List January, 1972

Color Variation—Since manufacturers of the vinyl film used on Eternawall are made to a commercial color match, minor color variations are possible. Panels applied on single walls or visual areas should be matched to minimize any slight color variations in the vinyl film.



WALNUT GP-682

FAWN GP-652

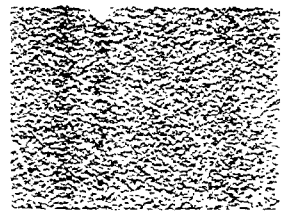

GOLD GP-684

SNOWDRIFT WHITE GP-651