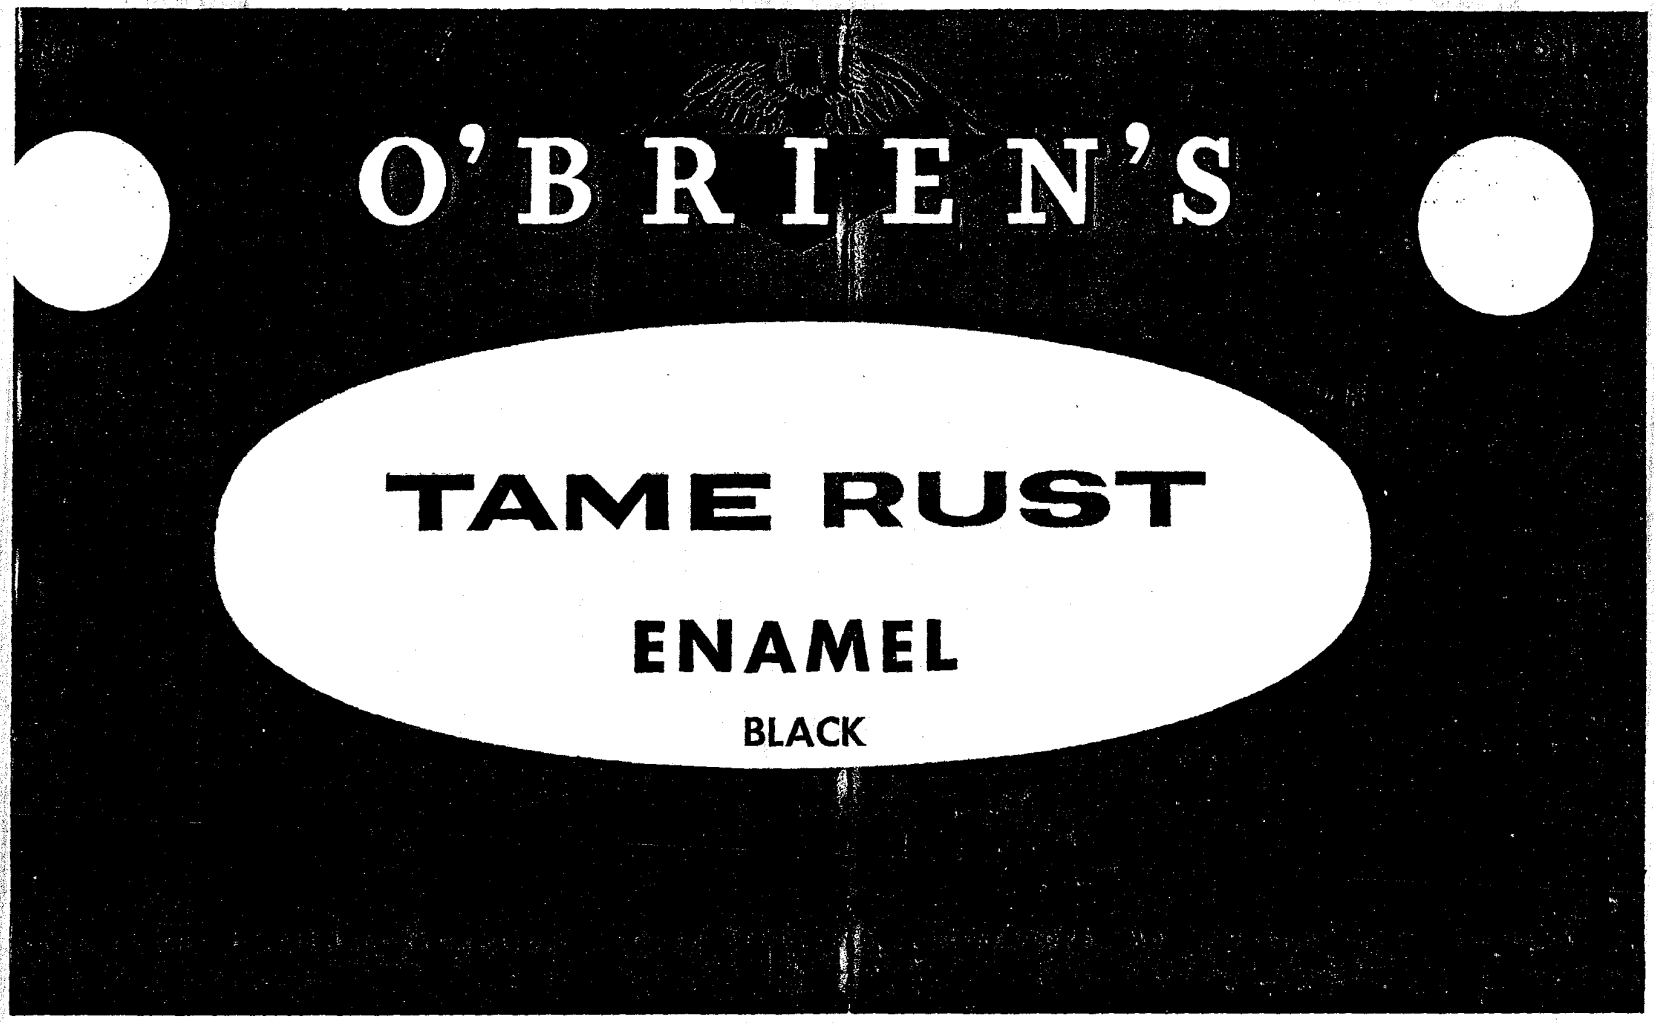

49 TOC 001398

NOTE — Painting over rusted surfaces is somewhat hazardous and *there is no complete insurance of a permanent, satisfactory result.* Excellent results can normally be expected with Tame Rust Enamel when the rusted areas are first wire brushed and then primed, per directions, with Tame Rust Metal Primer.

TAME RUST ENAMEL

This high quality, alkyd gloss enamel is recommended for use on both new and already painted metal and wood surfaces. Easily applied with brush or spray, it dries quickly and is self leveling. Provides a very hard, durable finish. May be used indoors or outdoors. Ideal for playground equipment, farm implements and machinery, elevators, pumps, pipes, tools, tractors, etc. For spray application, thin 10% with V.M.&P. Naphtha.

— • —

TAME RUST METAL PRIMER

A special metal primer to be used on new bare metal or on metal surfaces which have rusted and require a prime coat before finishing with Tame Rust Enamel or any other enamel or paint. Comes ready for use. When applied over rusted surfaces, thin primer 25% with special Tame Rust Primer Reducer. Allow 48 hours drying. The pigment and vehicle formulation of this primer is same as U. S. Gov't Spec. TTP-636B.

— • —

TAME RUST METAL PRIMER REDUCER

A special reducer to be added to Tame Rust Primer when the primer is used directly over rusted surfaces. Improves rust inhibiting and rust preventative properties of primer.

REGISTERED
REG'N. No. 7513
DATE 1-22-58

DIRECTIONS FOR USE

PREPARATION — All surfaces must be clean and dry. Remove all loose dirt, dust, grease, oil, rust scale, loose paint, etc. Wire brush rusted areas vigorously. **Stir paint well.**

NEW METAL — One coat O'Brien's Bond-On Metal Primer or Tame Rust Primer. After 48 hours drying, follow with one or two coats of Tame Rust Enamel.

RUSTED METAL — One coat of Tame Rust Primer thinned 25% with Tame Rust Reducer. After 48 hours drying, follow with one or two coats of Enamel.

NEW WOOD — One coat of Tame Rust Enamel, thinned 10% with Reducit or Mineral Spirits. After overnight drying, apply one coat of Enamel, as material comes from can.

OLD METAL OR WOOD — One or two coats of Tame Rust Enamel, as are necessary. Spot prime bare or rusted spots on metal with Primer.

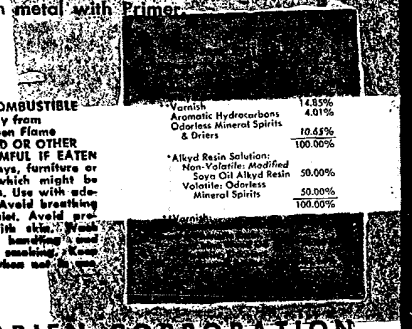

CAUTION! COMBUSTIBLE
Keep Away from
Heat and Open Flame
CONTAINS LEAD OR OTHER COMPOUNDS HARMFUL IF EATEN
Do not apply on toys, furniture or interior surfaces which might be chewed by children. Use with adequate ventilation. Avoid breathing vapor or spray mist. Avoid prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

*Varnish	14.85%
Aromatic Hydrocarbons	4.01%
Odorless Mineral Spirits & Driers	10.65%
	100.00%
*Alkyd Resin Solution: Non-Volatile: Modified Soya Oil Alkyd Resin	50.00%
Volatile: Odorless Mineral Spirits	50.00%
	100.00%

*Varnish [illegible]

THE O'BRIEN CORPORATION
SOUTH BEND, IND. **OKLAHOMA CITY, OKLA.**
BALTIMORE, MD. **SAN FRANCISCO, CALIF.**

49 TOC 001399