### F PLASTIC CAP

The F plastic cap is a translucent flexible plastic cap used to encapsulate up to four ***B wire connectors.*** Use with ***B sealant,*** AT-8502, which must be ordered separately.

### ORDERING INFORMATION

(qty) ct, Cap, Plastic, F, ct of 250 25/pk, 10 pks/ct

### TRIMLINE PLASTIC CAP

The trimline plastic cap is used for dead-ending C service wire and preventing moisture from entering the cleared ends.

The .250-14 (1-1/2 inch I.L.) black cap is used for 2-pair C service wire while the .312-24 (1-1/2 inch I.L.) red cap is used on 5-pair C service wire.

The .207-24 (1—1-1/2 inch I.L.) cap is used for ***C rural wire.***

### ORDERING INFORMATION

(qty) Cap, Plastic, Trimline, Black, (1-1/2 inch I.L.) .250-24
(qty) Cap, Plastic, Trimline, Red, (1-1/2 inch I.L.) .312-24
(qty) Cap, Plastic, Trimline (1—1-1/2 I.L.) .207-24

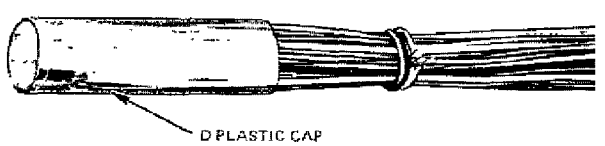


**D Plastic Cap Used to Insulate End of Cable Pairs**

### REFERENCES

AT-8187—Caps, Cable, B and C
AT-8473—Cap, Plastic, C
AT-8499—Cap, Plastic, D
AT-8503—Cap, Plastic, F
BSP 081-852-121—Description and Use—Trimline Plastic Caps
BSP 631-600-305—Pedestal Closures—Moisture Plug at Cable Ends
BSP 631-605-201—F Cable Closure—1-Entrance and 2-Entrance (F Plastic Cap)
BSP 632-410-203—Splicing PIC Cable—Encapsulation of Joints (C Plastic Cap)
BSP 633-505-212—Cable Caps—Temporary Cable End Seals
BSP 642-220-201—Dedicated Plant—Pole- and Wall-MountedHousings—Control and Access Points—Wiring Arrangements (D Plastic Cap)
EL 1889—8962 Multimold

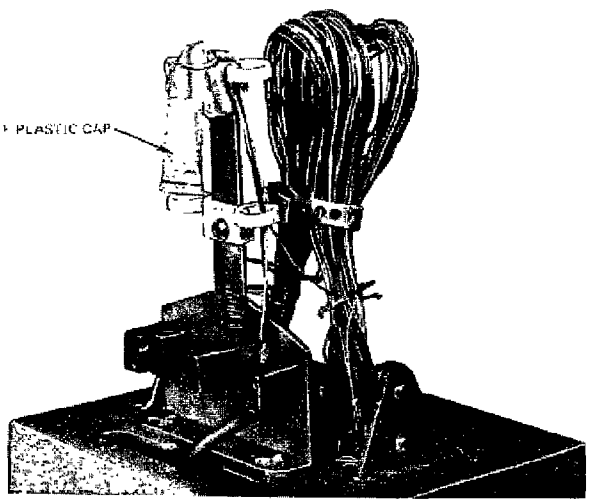


**F Plastic Cap Used in F Closure**

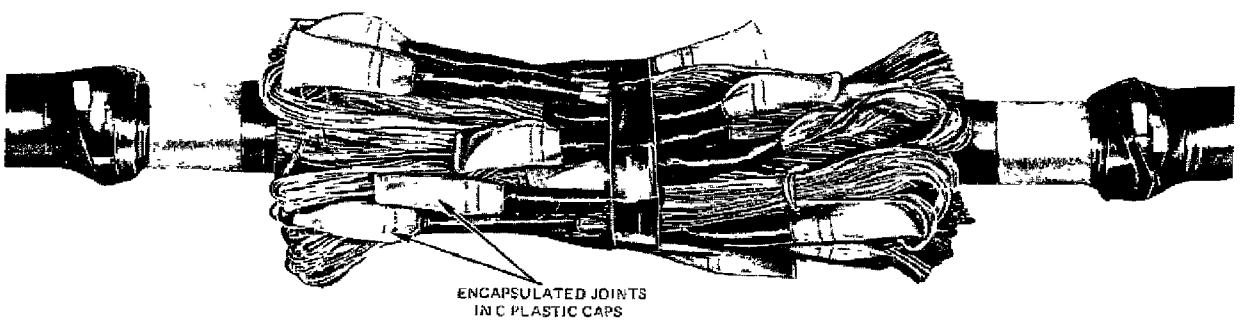


**Completed Splice With Encapsulated Joints**



TAY0000443

ATT-NJ-DEG-0076245