


# SUPEREX

## Specification Data

|                                                                            |                                                       |
|----------------------------------------------------------------------------|-------------------------------------------------------|
| Density (dry)                                                              | 24 lbs per cu ft                                      |
| Transverse Strength<br>(modulus of rupture)                                | 100 psi                                               |
| Compressive Strength                                                       | 85 psi to produce 1/8" compression<br>in 2" thickness |
| Linear Shrinkage<br>(after 24 hr soaking heat at<br>indicated temperature) | 2.7% at 1900F                                         |
| Maximum Service Temperature                                                | 1900F                                                 |

\*The figures given in this table are average values obtained in accordance with accepted test methods.

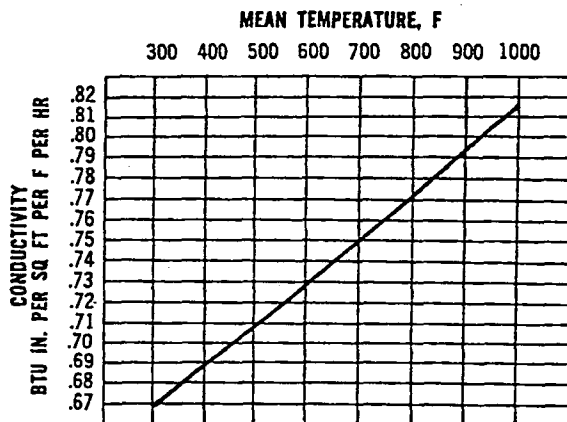

### COMPLIANCE WITH GOVERNMENT SPECS

MIL-I-002819 B, Class 3 and 4

### STANDARD SIZES AND THICKNESSES

| Length, inches | Width, inches                            | Thickness, inches              |
|----------------|------------------------------------------|--------------------------------|
| 18 and 36      | 3 & 6 flat or curved<br>9 & 12 flat only | 1 through 4<br>1 1/2 through 4 |

NOTE: For special sizes and curved blocks consult your nearest Johns-Manville office.

ET-000044