

LABEL MANUAL

1963

**SUGGESTED CAUTIONS COMPLYING WITH THE
LAW AND REGULATIONS UNDER THE FEDERAL
HAZARDOUS HOUSEHOLD SUBSTANCES LABEL-
ING ACT OF 1962**

ISSUED BY

The SHERWIN-WILLIAMS Co.

CLEVELAND 1, OHIO

0007-SWP-036194

FOREWORD

This Label Manual is prepared for formulators, sales division personnel, PC&C salesmen and any other institutional personnel to whom it will be of use.

The information given and caution copy shown is in accord with the latest received and all efforts will be made to keep it up to date as new products are developed or new Regulations are issued by Food & Drug or other governmental agencies.

In the event any of these cautions are supplied to and used by customers, the identification system set forth in the Manual should not be used by them as the system used is peculiar to our own set-up.

The cautions in the Manual are an expansion of those established by The National Paint, Varnish & Lacquer Association and are formulated to simplify, particularly, the assignment of the proper caution clause by the formulators or by any other persons charged with that duty.

Where the NPV&L Association Manual covers three or four situations with one proposed caution, we are setting up every possible situation with a separate and distinct caution so that when the caution identifications are placed on the formulae cards, no change is required unless a reformulation takes place that requires a different caution.

The goods produced and subject to the law have been divided into eight classes which roughly are as follows:

Class 1 — Pigmented paint products which have been divided into six divisions with the flash point and viscosity being the controlling factors.

Class 2 — Pigmented paint products paralleling the Class 1 groupings with a caution showing that the product contains lead or any other of the heavy metals in excess of certain minimum amounts.

Class 3 — Latex paints.

Class 4 — Paint and varnish removers.

Class 5 — Aerosols.

Class 6 — Products that are clear or have a heavy pigment that settles to the bottom leaving a light nstant fluid on top.

Class 7 — Cement paints.

Class 8 — Products that are specialties and each one would generally have a separate caution setting forth the hazards involved.

0007-SWP-036195

0007-SWP-000113051

To further amplify the identification symbols for each hazard, we have set them up as follows and this identification holds true throughout Classes 1 and 2:

- a — flash point 31°F. - 150°F. — more viscous than 150 S.S.U.
- b — flash point 21°F. - 80°F. — more viscous than 150 S.S.U.
- c — flash point 20°F. or less — more viscous than 150 S.S.U.
- h — flash point 81°F. - 150°F. — less viscous than 150 S.S.U.
- k — flash point 21°F. - 80°F. — less viscous than 150 S.S.U.
- l — flash point 20°F. or less — less viscous than 150 S.S.U.

We are required to warn when the product contains more than 10% aromatics and the identification symbols are as follows: r for benzene; t for toluene; x for xylene; w for a mixture of toluene and xylene, and z for aromatics other than the above. The aromatics require the special caution — Vapor Harmful.

The Food & Drug Administration has decided that products more viscous than 150 S.S.U.'s could not be aspirated into the lungs if vomiting is induced, so consequently, it is not necessary to carry the caution — "If swallowed, do not induce vomiting," which is required on the products less viscous than 150 S.S.U.'s.

This ruling was arrived at through the efforts of the NPV&L Association securing Dr. H. W. Gerarde of Esso Research Laboratory to testify as an expert and accounts for viscosity being measured in S.S.U.'s rather than a paint viscosity standard. The dividing line of the 150 S.S.U.'s is at about the viscosity of the A-1 Gardner Tube.

When establishing the caution on the Label Analysis Sheet A 127 B, it is advisable to type below the caution designation the harmful ingredients to be warned against so that the same can be inserted in the caution clause if required and the caution in itself is not fully explanatory.

Class 2 as indicated above covers the products containing lead compounds of which the lead content (calculated as Pb) is in excess of 1% of the total weight of the contained solids (including pigments, film solids and driers. Mercury in excess of 0.2% mercury as metal on the total of the paint is acceptable under the Federal Hazardous Substances Labeling Act, while the Z66.1 Committee of The American Standards Association says that coatings suitable for children's toys, furniture or interiors where children are kept shall not contain compounds of antimony, arsenic, cadmium, mercury or selenium of which the metal content individually or in total (calculated as Sb, As, Cd, Hg or Se respectively) is in excess of .06% by weight of the contained solids (including pigment, film solids and driers) or shall not contain barium compounds of which the water soluble barium (calculated as Ba) is in excess of 1% of the total barium in such coatings.

0007-SWP-036196

0007-SWP-000113052

Class 3 covers the latex products and provides for those coatings that only contain latex and those which include lead, mercury or other heavy metals in the limits set forth in the Class 2 requirements.

Class 4 is reserved for the Paint and Varnish Removers and covers both the Flammable and Non-Flammable products. These are limited in number and are practically tailor made for each product involved. The assignments are arbitrary and do not have any special significance except for identification. Note that the cautions for those products containing benzol carry the aromatic hydrocarbon caution although the caution identification does not do so.

Class 5 covers the Aerosols and the cautions have been revised to conform to the latest N. Y. C. Fire Department regulations. Type size is important and a copy of the regulations should be secured so that full compliance may be had. The warning must be printed in red on a white background for Flammable and Extremely Flammable products.

Products already registered must be re-registered within eighteen months of final adoption of these regulations.

Class 6 is reserved for those products which are thin and non-pigmented or have a heavy pigment that readily settles and leaves a clear natant liquid on the top. Because of the water-like characteristic of many products in this class, these cautions warn against transfer to bottles or other unlabeled containers. Natural products for this caution are: Thinners; Reducers; thin colorless varnishes; aluminum paints, etc.

Class 7 covers the cement or lime containing products or products requiring a caution warning against getting into eyes or on skin.

Class 8 is a catchall classification and will cover those specialty products which require cautions against hazards not ordinarily found in the products made by our industry. The assignment in this group is arbitrary and the identification symbol has no significance.

It will be noted that some of the cautions are split between the Face Panel and the Back Panel (or Side-Panel) and where this occurs, the portion designated "Face Panel" must be on the face or principal display panel and the balance designated "Back Panel" can be there or on the Side Panel or if desired can be included with the Face Panel's required information on the face with the line "Read carefully cautions elsewhere on the label" being omitted.

The type sizes given are for gallons and larger and the Regulations in Sect. 191.01 "Placement, Conspicuousness, Contrast" state as follows:

- a. The signal word, the statement of principal hazard or hazards and instructions to read carefully any cautions that may be placed elsewhere on the label shall appear together on the main panel of the label. This must be placed together and distinctively apart from other wording or designs. It can be set out within the borders of a square or a rectangle, with or without a borderline and by use of suitable contrasts with the background achieved by distinctive typography or color or by both when needed.

0007-SWP-036197

0007-SWP-000113053

- b. If product is highly toxic, a skull and crossbones must be used with the word "poison" — this does not have to be on the main panel.
- c. The signal word and statement of hazard must be in capital letters. These shall be of a size bearing a reasonable relationship to the other type on the main panel but not less than 18 point type; the statement of hazard shall not be less than 12 point type unless the space is too small to accommodate such type size but in no event smaller than 6 point type.
- d. Items other than those set forth above shall be no less than 10 point type and must be placed together elsewhere on the label, with adequate contrast achieved by typography, color or layout and in no event less than 6 point types unless an exemption has been applied for and granted by Food & Drug.

On collapsible metal tubes all information required by the laws and regulations shall appear as close to the dispensing end of the container as possible.

One good rule to follow is to look at your labels and satisfy yourself that the cautions are prominently located, easily read and plainly set forth the hazards involved and what to do about them.

As now established, you may use 18 point type for gallons and larger and down to 6 point type for the smallest sizes unless you get an exemption.

0007-SWP-036198

0007-SWP-000113054

1a (1-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C.

CAUTION! COMBUSTIBLE

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1a (1-62)

(18 pt. caps)

(10 pt. type)

(12 pt. type)

(10 pt. caps)

1at (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 10% Toluene.

(Face Panel)

REDACTED
FOR PRIVILEGE

VAPOR HARMFUL — COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(18 pt. caps)

(12 pt. caps)

(10 pt. type)

(Back Panel)

CONTAINS TOLUENE

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1at (10-62)

(10 pt. caps)

(10 pt. type)

(12 pt. type)

(10 pt. caps)

0007-SWP-036199

0007-SWP-000113055

law (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 10% Toluene and Xylene.

(Face Panel)

REDACTED FOR
PRIVILEGE

VAPOR HARMFUL — COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND XYLENE

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

law (10-62)

law (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 10% Xylene.

(Face Panel)

REDACTED FOR
PRIVILEGE

VAPOR HARMFUL — COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

law (10-62)

0007-SWP-036200

0007-SWP-000113056

1az (1-63)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel) —

REDACTED FOR
PRIVILEGE

VAPOR HARMFUL — COMBUSTIBLE
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS
Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

1az (1-63)

1b (1-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C.

(Face Panel)

WARNING! FLAMMABLE
Read carefully cautions elsewhere on the label.

(Back Panel)

Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

1b (1-62)

0007-SWP-036201

0007-SWP-000113057

1bc (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 10% Toluene.

(Face Panel)

REDACTED FOR
PRIVILEGE

VAPOR HARMFUL - FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE

Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1bc (10-62)

1bw (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 10% Toluene and Xylene.

(Face Panel)

REDACTED FOR
PRIVILEGE

VAPOR HARMFUL - FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND XYLENE

Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1bw (10-62)

0007-SWP-036202

0007-SWP-000113058

1bx (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 10% Xylene.

REDACTED FOR
PRIVILEGE

(Face Panel)

VAPOR HARMFUL — FLAMMABLE
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE
Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

1bx (10-62)

1bz (1-63)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

REDACTED FOR
PRIVILEGE

(Face Panel)

VAPOR HARMFUL — FLAMMABLE
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS
Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

1bz (1-63)

0007-SWP-036203

0007-SWP-000113059

1c (1-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C.

(Face Panel)

DANGER! EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1c (1-62)

1ct (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 10% Toluene.

(Face Panel)

DANGER!

VAPOR HARMFUL — EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE

Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1ct (10-62)

0007-SWP-036204

0007-SWP-000113060

1cw (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 10% Toluene and Xylene.

(Face Panel)

DANGER!

VAPOR HARMFUL – EXTREMELY FLAMMABLE
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND XYLENE

Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1cw (10-62)

1cx (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 10% Xylene.

(Face Panel)

DANGER!

VAPOR HARMFUL – EXTREMELY FLAMMABLE
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE

Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1cx (10-62)

0007-SWP-036205

0007-SWP-000113061

1cz (1-63)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel)

DANGER!

VAPOR HARMFUL – EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS

Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1cz (1-63)

1h (1-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED – COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS PETROLEUM DISTILLATES

DO NOT INDUCE VOMITING

CALL PHYSICIAN

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1h (1-62)

**REDACTED FOR
PRIVILEGE**

0007-SWP-036206

0007-SWP-000113062

EXOLVENT

*Delayed 60
4-4-67*

(Face Panel)

DANGER!
HARMFUL OR FATAL IF SWALLOWED -- COMBUSTIBLE
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS
Mineral Spirits, Solvent Naphtha and Pine Oil
DO NOT INDUCE VOMITING CALL PHYSICIAN

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

1he (4-66)

R. H. S.

APR 22 1966

0007-SWP-036207

0007-SWP-000113063

1hr (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 10% Toluene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL - COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1hr (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 10% Toluene and Xylene.

1hr (10-62)

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL - COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1hr (10-62)

0007-SWP-036208

0007-SWP-000113064

1hz (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 10% Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL - COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1hz (10-62)

1hz (1-63)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL - COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1hz (1-63)

0007-SWP-036209

0007-SWP-000113065

1k (1-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C.

(Face Panel)

DANGER!

**HARMFUL OR FATAL IF SWALLOWED
FLAMMABLE**

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS PETROLEUM DISTILLATES
DO NOT INDUCE VOMITING CALL PHYSICIAN IMMEDIATELY
Keep away from heat, sparks, and open flame. Avoid prolonged
breathing of vapor or spray mist. Avoid contact with skin. Close
container after using.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

1k (1-62)

1kt (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 10% Toluene.

(Face Panel)

DANGER!

**HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL — FLAMMABLE**

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE
IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY
Keep away from heat, sparks, and open flame. Avoid prolonged
breathing of vapor or spray mist. Avoid contact with skin. Close
container after using.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

1kt (10-62)

0007-SWP-036210

0007-SWP-000113066

1kw (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 10% Toluene and Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL - FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1kw (10-62)

1kx (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 10% Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED-
VAPOR HARMFUL - FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1kx (10-62)

0007-SWP-036211

0007-SWP-000113067

1kz (1-63)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F.-80°F. T.O.C. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel)

DANGER!

**HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL — FLAMMABLE**

Read carefully cautions elsewhere on the label.

(Back Panel)

**CONTAINS AROMATIC HYDROCARBONS
IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY**

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1kz (1-63)

1L (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C.

(Face Panel)

DANGER!

**HARMFUL OR FATAL IF SWALLOWED
EXTREMELY FLAMMABLE**

Read carefully cautions elsewhere on the label.

(Back Panel)

**CONTAINS PETROLEUM DISTILLATES
IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY**

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1L (10-62)

0007-SWP-036212

0007-SWP-000113068

1Lt (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 10% Toluene.

(Face Panel)

DANGER!

**HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL – EXTREMELY FLAMMABLE**

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1Lt (10-62)

1Lw (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 10% Toluene and Xylene.

(Face Panel)

DANGER!

**HARMFUL OR FATAL IF SWALLOWED -
VAPOR HARMFUL – EXTREMELY FLAMMABLE**

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1Lw (10-62)

0007-SWP-036213

0007-SWP-000113069

1Lx (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 10% Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL — EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1Lx (10-42)

1Lz (1-63)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL — EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

1Lz (10-42)

0007-SWP-036214

0007-SWP-000113070

2 (3-63)

Special for dry lead containing compound.

WARNING!

CONTAINS LEAD COMPOUNDS

Wash thoroughly after handling and before eating and smoking.

DO NOT TAKE INTERNALLY

2 (3-63)

2a (1-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 1% lead in dried film.

CAUTION! COMBUSTIBLE

CONTAINS LEAD

HARMFUL IF EATEN

Keep away from heat and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2a (1-62)

**REDACTED FOR
PRIVILEGE**

0007-SWP-036215

0007-SWP-000113071

2ac (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene.

REDACTED FOR
PRIVILEGE

VAPOR HARMFUL - COMBUSTIBLE
CONTAINS TOULENE AND LEAD

HARMFUL IF EATEN

Keep away from heat and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2at (10-62)

2aw (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene and Xylene.

REDACTED
FOR PRIVILEGE

VAPOR HARMFUL - COMBUSTIBLE
CONTAINS TOLUENE, XYLENE AND LEAD

HARMFUL IF EATEN

Keep away from heat and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2aw (10-62)

0007-SWP-036216

0007-SWP-000113072

2ax (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Xylene.

REDACTED FOR
PRIVILEGE

VAPOR HARMFUL - COMBUSTIBLE
CONTAINS XYLENE AND LEAD
HARMFUL IF EATEN

Keep away from heat and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2ax (10-62)

2az (1-63)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

REDACTED FOR
PRIVILEGE

VAPOR HARMFUL - COMBUSTIBLE
CONTAINS AROMATIC HYDROCARBONS AND LEAD
HARMFUL IF EATEN

Keep away from heat and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating and smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2az (1-63)

0007-SWP-036217

0007-SWP-000113073

REDACTED FOR
PRIVILEGE

0007-SWP-036218

0007-SWP-000113074

REDACTED FOR
PRIVILEGE

0007-SWP-036219

0007-SWP-000113075

2b (1-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21° F. - 80° F. T.O.C. Contains over 1% lead in dried film.

(Face Panel)

WARNING! FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS LEAD

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2b (1-62)

2bb (10-62)

**REDACTED FOR
PRIVILEGE**

0007-SWP-036220

0007-SWP-000113076

2bt (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene.

(Face Panel)

REDACTED FOR
PRIVILEGE

VAPOR HARMFUL — FLAMMABLE
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND LEAD
HARMFUL IF EATEN
Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2bt (10-62)

6-65
2bw (10-65)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene and Xylene.

(Face Panel)

WARNING

VAPOR HARMFUL — FLAMMABLE
Read carefully cautions elsewhere on the label.

(Back Panel)

DANGER! VAPOR HARMFUL — FLAMMABLE
CONTAINS TOLUENE, XYLENE AND MAY CONTAIN LEAD OR OTHER SUBSTANCES
HARMFUL IF EATEN
Keep from heat, sparks and open flames. Do not use on window sills, toys, cribs, other furniture or any place that may be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2bw (10-65)

REDACTED FOR
PRIVILEGE

0007-SWP-036221

0007-SWP-000113077

2bx (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Xylene.

(Face Panel)

REDACTED FOR
PRIVILEGE

VAPOR HARMFUL - FLAMMABLE
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE AND LEAD
HARMFUL IF EATEN
Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2bx (10-62)

2bz (1-63)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel)

REDACTED FOR
PRIVILEGE

VAPOR HARMFUL - FLAMMABLE
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS AND LEAD
HARMFUL IF EATEN
Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2bz (1-63)

0007-SWP-036222

0007-SWP-000113078

REDACTED FOR
PRIVILEGE

0007-SWP-036223

0007-SWP-000113079

REDACTED
FOR PRIVILEGE

0007-SWP-036224

0007-SWP-000113080

2c (1-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 1% lead in dried film.

(Face Panel)

DANGER! EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

**CONTAINS LEAD
HARMFUL IF EATEN**

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2c (1-62)

2ct (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene.

(Face Panel)

DANGER!

VAPOR HARMFUL — EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

**CONTAINS TOLUENE AND LEAD
HARMFUL IF EATEN**

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2ct (10-62)

0007-SWP-036225

0007-SWP-000113081

2cw (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene and Xylene.

(Face Panel)

DANGER!

VAPOR HARMFUL — EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE, XYLENE AND LEAD

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2cw (10-62)

2cx (10-62)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 1% lead in dried film. Contains over 10% Xylene.

(Face Panel)

DANGER!

VAPOR HARMFUL — EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE AND LEAD

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2cx (10-62)

0007-SWP-036226

0007-SWP-000113082

2cz (1-63)

For products with Viscosity over A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20° F. or under T.O.C. Contains over 1% lead in dried film. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel)

DANGER!

VAPOR HARMFUL — EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS AND LEAD

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2cz (1-63)

**REDACTED FOR
PRIVILEGE**

0007-SWP-036227

0007-SWP-000113083

REDACTED FOR
PRIVILEGE

0007-SWP-036228

0007-SWP-000113084

REDACTED FOR
PRIVILEGE

0007-SWP-036229

0007-SWP-000113085

2h (1-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 1% lead in dried film.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED - COMBUSTIBLE
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS PETROLEUM DISTILLATES AND LEAD

DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

Keep away from heat and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2h (1-62)

2hc (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene.

(Face Panel)

DANGER!

VAPOR HARMFUL - COMBUSTIBLE
HARMFUL OR FATAL IF SWALLOWED
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND LEAD

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

Keep away from heat and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2hc (10-62)

0007-SWP-036230

0007-SWP-000113086

2hw (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene and Xylene.

(Face Panel)

DANGER!

VAPOR HARMFUL - COMBUSTIBLE
HARMFUL OR FATAL IF SWALLOWED
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE, XYLENE AND LEAD
IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY
HARMFUL IF EATEN

Keep away from heat and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2hw (10-62)

2hx (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 81°F. - 150°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Xylene.

(Face Panel)

DANGER!

VAPOR HARMFUL - COMBUSTIBLE
HARMFUL OR FATAL IF SWALLOWED
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE AND LEAD
IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY
HARMFUL IF EATEN

Keep away from heat and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2hx (10-62)

0007-SWP-036231

0007-SWP-000113087

2Lz 1-63

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 1% lead in dried film. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel)

DANGER!

**VAPOR HARMFUL - EXTREMELY FLAMMABLE
HARMFUL OR FATAL IF SWALLOWED**

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS AND LEAD

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2Lz (1-63)

**REDACTED FOR
PRIVILEGE**

0007-SWP-036232

0007-SWP-000113088

REDACTED FOR
PRIVILEGE

0007-SWP-036233

0007-SWP-000113089

REDACTED FOR
PRIVILEGE

0007-SWP-036234

0007-SWP-000113090

2k (1-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 1% lead in dried film.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED - FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS PETROLEUM DISTILLATES AND LEAD
DO NOT INDUCE VOMITING CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2k (1-62)

2kt (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene

(Face Panel)

DANGER!

VAPOR HARMFUL - FLAMMABLE

HARMFUL OR FATAL IF SWALLOWED

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND LEAD
IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2kt (10-62)

0007-SWP-036235

0007-SWP-000113091

2kw (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene and Xylene.

(Face Panel)

DANGER!

**VAPOR HARMFUL - FLAMMABLE
HARMFUL OR FATAL IF SWALLOWED**
Read carefully cautions elsewhere on the label.

(Back Panel)

**CONTAINS TOLUENE, XYLENE AND LEAD
IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY
HARMFUL IF EATEN**

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2kw (10-62)

2kx (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Xylene.

(Face Panel)

DANGER!

**VAPOR HARMFUL - FLAMMABLE
HARMFUL OR FATAL IF SWALLOWED**
Read carefully cautions elsewhere on the label.

(Back Panel)

**CONTAINS XYLENE AND LEAD
IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY
HARMFUL IF EATEN**

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

2kx (10-62)

0007-SWP-036236

0007-SWP-000113092

2kz (1-63)

For products with Viscosity under A-I Gardner Tube (150 S.S.U.'s - 33 centistokes). Flash point 21°F. - 80°F. T.O.C. Contains over 1% lead in dried film. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel)

DANGER!

**VAPOR HARMFUL - FLAMMABLE
HARMFUL OR FATAL IF SWALLOWED**
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS AND LEAD

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2kz (1-63)

**REDACTED FOR
PRIVILEGE**

0007-SWP-036237

0007-SWP-000113093

REDACTED FOR
PRIVILEGE

0007-SWP-036238

0007-SWP-000113094

REDACTED FOR
PRIVILEGE

0007-SWP-036239

0007-SWP-000113095

2L (1-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 1% lead in dried film.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED — EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS PETROLEUM DISTILLATES AND LEAD

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2L (1-62)

2Lc (10-62)

For products with Viscosity under A-1 Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene.

(Face Panel)

DANGER!

VAPOR HARMFUL — EXTREMELY FLAMMABLE

HARMFUL OR FATAL IF SWALLOWED

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND LEAD

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2Lc (10-62)

0007-SWP-036240

0007-SWP-000113096

2Lw (10-62)

For products with Viscosity under A-I Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 1% lead in dried film. Contains over 10% Toluene and Xylene.

(Face Panel)

DANGER!

VAPOR HARMFUL – EXTREMELY FLAMMABLE

HARMFUL OR FATAL IF SWALLOWED

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE, XYLENE AND LEAD

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2Lw (10-62)

2Lx (10-62)

For products with Viscosity under A-I Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 1% lead in dried film. Contains over 10% Xylene.

(Face Panel)

DANGER!

VAPOR HARMFUL – EXTREMELY FLAMMABLE

HARMFUL OR FATAL IF SWALLOWED –

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE AND LEAD

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2Lx (10-62)

0007-SWP-036241

0007-SWP-000113097

2Lz 1-63

For products with Viscosity under A-I Gardner Tube (150 S.S.U.'s) (33 centistokes). Flash point 20°F. or under T.O.C. Contains over 1% lead in dried film. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel)

DANGER!

VAPOR HARMFUL - EXTREMELY FLAMMABLE

HARMFUL OR FATAL IF SWALLOWED

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS AND LEAD

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

Keep away from heat, sparks, and open flame. Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

2Lz (1-43)

**REDACTED FOR
PRIVILEGE**

0007-SWP-036242

0007-SWP-000113098

REDACTED FOR
PRIVILEGE

0007-SWP-036243

0007-SWP-000113099

REDACTED
FOR PRIVILEGE

0007-SWP-036244



0007-SWP-000113100

3a (1-62)

LATEX PAINTS

CAUTION

Avoid prolonged contact with skin or breathing of spray mist.
Close container after each use. Do not take internally.

KEEP OUT OF THE REACH OF CHILDREN

3a (1-62)

3b (1-62)

LATEX PAINTS

CAUTION

CONTAINS

HARMFUL IF EATEN

Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating and smoking. Keep container closed when not in use.

KEEP OUT OF THE REACH OF CHILDREN

3b (1-62)

0007-SWP-036245

0007-SWP-000113101

OK FIVE STAR PAINT REMOVER V3 K 154

4 (12-62)

(Face Panel)

CAUTION!

MAY BE HARMFUL IF SWALLOWED
SKIN AND EYE IRRITANT

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS METHYLENE CHLORIDE

Avoid prolonged and repeated breathing of vapor or contact with skin or eyes. In case of contact with eyes, flood repeatedly with water. Contact with flame or hot surfaces may produce toxic and corrosive gases. Close container after each use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

4 (12-62)

4a (1-62)

WASH AWAY PAINT REMOVER


(Face Panel)

DANGER!

MAY BE FATAL OR CAUSE BLINDNESS IF SWALLOWED
SKIN IRRITANT - VAPOR HARMFUL

See cautions elsewhere on the label.

(Back Panel)



CONTAINS METHYLENE CHLORIDE AND METHANOL

CANNOT BE MADE NON-POISONOUS

If swallowed, induce vomiting by giving a tablespoon of salt in warm water and repeat until vomit fluid is clear; follow with two teaspoonfuls of baking soda in glass of water. Have patient lie down and keep warm. Cover eyes to exclude light. In case of contact with eyes, flood repeatedly with water. In either case CALL PHYSICIAN IMMEDIATELY. Avoid breathing of vapor or contact with skin. Contact with flame or hot surfaces may produce toxic and corrosive gases. Close container after each use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

4a (1-62)

0007-SWP-036246

0007-SWP-000113102

4bb (10-62)

PAINT AND VARNISH REMOVERS AND OTHER PRODUCTS
WITH METHANOL AND OTHER TOXIC INGREDIENTS

(Face Panel)

DANGER!  POISON!
MAY BE FATAL OR CAUSE BLINDNESS IF SWALLOWED
VAPOR HARMFUL — FLAMMABLE
Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS
CANNOT BE MADE NON-POISONOUS
If swallowed, induce vomiting by giving a tablespoonful of salt in warm water and repeat until vomit fluid is clear; follow with two teaspoonfuls of baking soda in glass of water. Have patient lie down and keep warm. Cover eyes to exclude light. In case of contact with eyes, flood repeatedly with water. In either case CALL PHYSICIAN IMMEDIATELY. Avoid breathing of vapor or contact with skin. Contact with flame or hot surfaces may produce toxic and corrosive gases. Close container after each use.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

4bb (10-62)

4c (1-62)

TAXITE, A81 K 10 and TAXITE SEMI-PASTE, A81 K 1

(Face Panel)

x DANGER  POISON
MAY BE FATAL OR CAUSE BLINDNESS IF SWALLOWED
EXTREMELY FLAMMABLE — VAPOR HARMFUL
See cautions elsewhere on the label.

(Back Panel)

CONTAINS BENZOL, METHANOL, METHYL ACETATE
CANNOT BE MADE NON-POISONOUS
If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY. Remove patient to fresh air, but have him lie down and keep warm. Cover eyes to exclude light. In case of contact with eyes, flood repeatedly with water. Keep away from heat, sparks, and open flame. Close container after each use. Avoid prolonged or repeated breathing of vapor or contact with skin.
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

4c (1-62)

0007-SWP-036247

0007-SWP-000113103

3t (9-65)

Caution - Use with adequate ventilation. Avoid prolonged breathing of vapor or contact with skin. Do not take internally. Contains Chlorinated Hydrocarbons, Keep out of the reach children.

0007-SWP-036248

0007-SWP-000113104

(FACE PANEL)

DANGER

HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL -- FLAMMABLE

READ CAREFULLY CAUTIONS ELSEWHERE ON THE LABEL

14 Pt. - 12 Pt.

12 Pt. - 10Pt.

10 Pt., 8Pt., 8Pt.

(BACK PANEL)

CONTAINS AROMATIC HYDROCARBONS,
BUTYL CELLOSOLVE AND ISOPROPANOL

12 Pt., 10Pt, 8Pt

IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks and open flame.
Avoid prolonged breathing of vapor or spray
mist. Do not transfer contents to bottles
or other unlabeled containers. Close con-
tainer after using.

12 Pt. 10 Pt.
8 Pt.

USE WITH ADEQUATE VENTILATION
KEEP OUT OF THE REACH OF CHILDREN

14 Pt. 12 Pt. 10Pt
12 Pt. 10 Pt. 8

6bzz (4-66)

0007-SWP-036249

0007-SWP-000113105

6ct (10-62)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 20°F.
or under T.O.C. Contains over 10% Toluene.

(Face Panel)

DANGER!

**HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL — EXTREMELY FLAMMABLE**

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6ct (10-62)

6cw (10-62)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 20°F.
or under T.O.C. Contains over 10% Toluene and Xylene.

(Face Panel)

DANGER!

**HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL — EXTREMELY FLAMMABLE**

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6cw (10-62)

0007-SWP-036250

0007-SWP-000113106

6cx (10-62)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 20°F.
or under T.O.C. Contains over 10% Xylene.

(Face Panel)

DANGER!

**HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL – EXTREMELY FLAMMABLE**

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6cx (10-62)

6cz (1-63)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 20°F.
or under T.O.C. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel)

DANGER!

**HARMFUL OR FATAL IF SWALLOWED
VAPOR HARMFUL – EXTREMELY FLAMMABLE**

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6cz (1-63)

0007-SWP-036251

0007-SWP-000113107

5h (1-62)

BEAUTY LAST

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS PETROLEUM DISTILLATES AND LEAD

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

COMBUSTIBLE

HARMFUL IF EATEN

Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

5h (1-62)

6j (10-62)

SPECIAL FOR R7 K 206

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS CELLOSOLVE ACETATE

CALL PHYSICIAN IMMEDIATELY

Do not transfer contents to bottles or other unlabeled containers. Close container after using.

KEEP OUT OF THE REACH OF CHILDREN

6j (10-62)

0007-SWP-036252

0007-SWP-000113108

REDACTED FOR
PRIVILEGE

8b (1-62)

SHELLAC

(Face Panel)

WARNING! FLAMMABLE

Read carefully cautions elsewhere on the label.

REDACTED FOR
PRIVILEGE

(Back Panel)

Keep from heat, sparks, and open flame. Avoid breathing of
vapor or contact with skin. Close can after using. Do not take
internally.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

8b (1-62)

0007-SWP-036253

0007-SWP-000113109

EL-KOL

(FACE PANEL)

DANGER: POISON

18 Pt. - Qt. & Gal.
1 1/2 Pt. - Pint

MAY BE FATAL OR CAUSE BLINDNESS IF SWALLOWED. FLAMMABLE - VAPOR HARMFUL

12 Pt. - Qt. & Gal.
6 Pt. Min. - Pint

Read carefully cautions elsewhere on the label

10 Pt. - Qt. & Gal.
6 Pt. Min. - Pint

(BACK PANEL)

CONTAINS METHANOL
CANNOT BE MADE NON-POISONOUS

10 Pt. - Qt. & Gal.
6 Pt. Min. - Pint

Avoid breathing of vapor or contact with skin or eyes. Keep away from heat, sparks and open flame. Close container after each use. *Notice: Do not use for anti-freeze purposes.

*Must be prominent
and legible

KEEP OUT OF REACH OF CHILDREN

12 Pt. - Qt. & Gal.
10 Pt. - Pint

FIRST AID TREATMENT - ANTIDOTE - If swallowed, induce vomiting by giving a tablespoonful of salt in warm water and repeat until vomit fluid is clear; follow with two teaspoonfuls of baking soda in glass of water. Have patient lie down and keep warm. Cover eyes to exclude light. In case of contact with eyes, flood repeatedly with water. In either case; CALL PHYSICIAN.

10 Pt. - Qt. & Gal.
6 Pt. Min. - Pint

8be (4-66)

R. H. S.

APR 26 1966

0007-SWP-036254

0007-SWP-000113110



COPY OF LETTER WRITTEN BY THE MARTIN-SENOUR COMPANY



Martin-Senour
Special for X-4861 10%
Sodium Hydroxide Solution;
Caustic Soda or Lye Solutions
of 10% or higher concentration.

8E(1-65)

W A R N I N G

(18 pt. caps)

POISON

(18 pt. caps)

CAUSES SEVERE BURNS TO SKIN AND EYES

(12 pt. caps)

DO NOT TAKE INTERNALLY

(12 pt. caps)

Avoid contact with skin, eyes, and clothing.

When handling, wear goggles or face shield.

In case of contact, immediately flush skin with plenty of water and wash with vinegar; for eyes, flush with plenty of water for at least 15 minutes and get medical attention.

(10 pt. type)

* **ANTIDOTE:** Do not induce vomiting. Give water with large amount of diluted vinegar, lemon or orange juice. Follow with milk or white of eggs beaten with water.

(10 pt. type)

* **CALL A PHYSICIAN**

*(12 pt. caps)

H. R. E.
JAN 26 1965

KEM PENTA TYPE WOOD PRESERVATIVE #1 A17 V 1

(Face Panel)

8c (7-60)

REDACTED FOR
PRIVILEGE

KEEP OUT OF THE REACH OF CHILDREN

SEE CAUTION AND ANTIDOTE STATEMENT ON BACK PANEL

(Back Panel)

CAUTION COMBUSTIBLE!

Contains Pentachlorophenol

Keep away from heat and open flame. Harmful if
swallowed or absorbed through skin! Causes skin
irritation! Do not breathe vapor or spray mist.
Do not get in eyes, on skin or clothing. Wash
thoroughly after handling.

Use with adequate ventilation

KEEP OUT OF THE REACH OF CHILDREN

-- ANTIDOTE --

EXTERNAL: Wash with rubbing alcohol and follow
with plenty of soap and warm water; for eyes,
flush with plenty of water for at least 15 minutes
and get medical attention.

INTERNAL: Give a tablespoonful of salt in a glass
of warm water and repeat until vomit fluid is clear.
Give milk or white of eggs beaten with water. Have
patient lie down and keep warm.

CALL A PHYSICIAN IMMEDIATELY

0007-SWP-036256

0007-SWP-000113112

8bb (1-62)

STAIN COVER

(Face Panel)

WARNING! FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS ALCOHOL

Keep from heat, sparks, and open flame. Avoid breathing of vapor or contact with skin. Close can after using. Do not take internally.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

8bb (1-62)

BRUSH CLEANER

8d (5-63)

(Face Panel)

WARNING!

Avoid contact with skin and eyes.
See cautions elsewhere on the label.

(Back Panel)

CONTAINS SODIUM SALT OF TAR OIL ACIDS

Avoid contact with skin and eyes. May irritate skin. If splashed in eyes, flush out with plenty of water and call physician. Do not take internally.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

8d (5-63)

0007-SWP-036257

0007-SWP-000113113

8g (9-62)

GRIPCLAD ACTIVATOR

WARNING — FLAMMABLE

CONTAINS PHOSPHORIC ACID

May cause skin irritation — avoid contact with skin and eyes. In case of contact, flush skin and eyes with plenty of water; for eyes, get medical attention. Keep from heat, sparks, and open flame. Close can after using. Avoid breathing of vapor. Do not take internally.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

8g (9-62)

8gg (3-63)

SPECIAL FOR WASH PRIMER, E90 G 4
(Acid Component)

WARNING — FLAMMABLE

CONTAINS PHOSPHORIC ACID, BUTANOL, ISOPROPANOL

May cause skin irritation — avoid contact with skin and eyes. In case of contact, flush skin and eyes with plenty of water; for eyes get medical attention. Keep away from heat, sparks, and open flame. Close container after using. Avoid breathing of vapor. Do not take internally.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

8gg (3-63)

0007-SWP-036258

0007-SWP-000113114

8h (1-62)

Q. D. DRIER

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS PETROLEUM DISTILLATES AND LEAD
IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY

HARMFUL IF EATEN

COMBUSTIBLE

Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

8h (1-62)

8m (3-63)

SPECIAL FOR RUBBING COMPOUNDS

CAUTION—COMBUSTIBLE

Avoid breathing dust when polishing dried compound. This operation should be performed in a well-ventilated place. Contains abrasive materials. Keep away from eyes.

KEEP OUT OF THE REACH OF CHILDREN

8m (3-63)

0007-SWP-036259

0007-SWP-000113115

+ 8n (5-63)

SPECIAL FOR KEM CATI-COAT CATALYST — V66 V 15

REDACTED FOR
PRIVILEGE

FLAMMABLE
LIQUID AND VAPOR

CONTAINS TOLUENE

Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

8n (5-63)

+ 8nn (7-64)

REDACTED FOR
PRIVILEGE

Same as 8n except the "Contains" statement is as follows: "Contains an organic acid orthophosphate, Isopropanol and Toluene."

+ 8p (5-63)

SPECIAL FOR KEM CATI-COAT CATALYST — V66 V 19

REDACTED FOR
PRIVILEGE

FLAMMABLE
LIQUID AND VAPOR

CONTAINS XYLENE

Keep from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Avoid contact with skin. Do not take internally. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

8p (5-63)

0007-SWP-036260

0007-SWP-000113116

8hg (5-65)

DANGER! HARMFUL OR FATAL IF SWALLOWED

(18 pt. caps)

CONTAINS MERCURY

(18 pt. caps)

Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use.

(10 pt. type)

Use with adequate ventilation.

(12 pt. type)

KEEP OUT OF THE REACH OF CHILDREN

(10 pt. caps)

8hg (5-65) X

0007-SWP-036261

0007-SWP-000113117

KEM(R) CO. PRE TYPE WOOD PRESERVATIVE #2

(Face panel)

WARNING: KEEP OUT OF REACH OF CHILDREN
READ CAREFULLY WARNING ON BACK LABEL

(Back panel)

DANGER

Harmful or Fatal if swallowed - Combustible

**Contains Petroleum Distillates
If Swallowed, Do Not Induce Vomiting
Call Physician Immediately**

**Keep away from heat and open flames. Avoid prolonged
breathing of vapor or spray mist. Do not transfer
contents to bottles or other unlabeled containers.
Close container after using.**

Use with adequate ventilation

KEEP OUT OF REACH OF CHILDREN

8k(10-66)


D. F. Z.

OCT 26 1955

0007-SWP-036262

0007-SWP-000113118

*Special for Multi-Color - 8r X

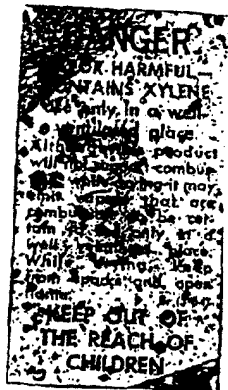

* Special for Multi-Color Containing Lead or Other Heavy Metals - 8rr X

(FRONT PANEL)

DANGER
VAPOR HARMFUL - CONTAINS XYLENE
Use only in a well-ventilated place
Read carefully cautions elsewhere on this label

(BACK PANEL)

CONTAINS _____, HARMFUL IF EATEN

Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other places which might be shared by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking.

This product will not support combustion but while drying it may emit vapors that are combustible. While drying, keep from sparks and open flame.

KEEP OUT OF THE REACH OF CHILDREN

0007-SWP-036263

0007-SWP-000113119

8s (5-63) X

TURPENTINE

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

See cautions elsewhere on the label.

(Back Panel)

CONTAINS TURPENTINE - COMBUSTIBLE
IF SWALLOWED GIVE ONE OR TWO GLASSES OF
WATER OR MILK. CALL PHYSICIAN IMMEDIATELY

Keep away from heat or open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

8s (5-63)

8u (5-63) X

DEXALL WOOD PATCH

(Face Panel)

WARNING! FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS VOLATILE SOLVENTS

Avoid excessive inhalation of fumes or contact with skin. Keep container closed when not in use.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

8u (5-63)

0007-SWP-036264

0007-SWP-000113120

F. X. Zehnder

82 (3-65)

Cleveland

Legal


to Chicago

March 22, 1965

O. C. Keplinger
Att: F. W. Brown

Zinc Conditioner W4 K 264

REDACTED FOR
PRIVILEGE



Attorney

Bruce Homer:mk

CC: F. H. Pathe
Nick Gus
F. X. Zehnder
E. L. Superita (D. Graf)

M. R. P.
MAR 22 1965

0007-SWP-036265

0007-SWP-000113121

6bw (10-62)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 21°F.
80°F. T.O.C. Contains over 10% Toluene and Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

VAPOR HARMFUL — FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6bw (10-62)

6bx (10-62)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 21°F.
80°F. T.O.C. Contains over 10% Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

VAPOR HARMFUL — FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6bx (10-62)

0007-SWP-036266

0007-SWP-000113122

6bz (1-63)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 21°F.
80°F. T.O.C. Contains over 10% Aromatic Hydrocarbons other than Toluene
and Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

VAPOR HARMFUL - FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged
breathing of vapor or spray mist. Do not transfer contents to
bottles or other unlabeled containers. Close container after
using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6bz (1-63)

6c (10-62)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 20°F.
or under T.O.C.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED - EXTREMELY FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS PETROLEUM DISTILLATES

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged
breathing of vapor or spray mist. Do not transfer contents to
bottles or other unlabeled containers. Close container after
using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6c (10-62)

0007-SWP-036267

0007-SWP-000113123

6ax (10-62)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 81°F.
150°F. T.O.C. Contains over 10% Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

VAPOR HARMFUL - COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

5ax (10-62)

6az (1-63)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 81°F.
150°F. T.O.C. Contains over 10% Aromatic Hydrocarbons other than Toluene and Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

VAPOR HARMFUL - COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS AROMATIC HYDROCARBONS

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6az (1-63)

0007-SWP-036268

0007-SWP-000113124

6b (10-62)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 21°F.
80°F. T.O.C.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED — FLAMMABLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS PETROLEUM DISTILLATES

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

5b (10-62)

6br (10-62)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 21°F.
80°F. T.O.C. Contains over 10% Toluene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

VAPOR HARMFUL — FLAMMABLE

(Back Panel)

CONTAINS TOLUENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat, sparks, and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

5br (10-62)

0007-SWP-036269

0007-SWP-000113125

Size of Label
on
Front Panel
In Square Inches

5 and under
above 5 to 10
above 10 to 15
above 15 to 30
over 30

Signal Word
as Required
Minimum Type Size All
Capitals

6 point
10 point
12 point
14 point
18 point

"Keep out of reach
of children"
as required

6 point
6 point
8 point
10 point
12 point

0007-SWP-036270 77

0007-SWP-000113126

4bat (8-64)

(Face Panel)

DANGER!

SKIN AND EYE IRRITANT — VAPOR HARMFUL
HARMFUL OR FATAL IF SWALLOWED — FLAMMABLE
See cautions elsewhere on the label.

(Back Panel)

CONTAINS METHYLENE CHLORIDE, ACETONE, TOLUENE
IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY
Keep away from heat, sparks, and open flame. Avoid pro-
longed breathing of vapor or spray mist. In case of contact
with eyes, flood repeatedly with water. Contact with flame
or hot surfaces may produce toxic or corrosive gases. Keep
container closed when not in use. 4bat (8-64)
Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

4bt (10-62)

(Back Panel)

DANGER!  **POISON**
MAY BE FATAL OR CAUSE BLINDNESS IF SWALLOWED
FLAMMABLE — VAPOR HARMFUL
CONTAINS METHANOL AND TOLUENE
CANNOT BE MADE NON-POISONOUS
If swallowed, induce vomiting by giving a tablespoonful of salt in warm water
and repeat until vomit fluid is clear; follow with two teaspoonfuls of baking
soda in glass of water. Have patient lie down and keep warm. Cover eyes to
exclude light. In case of contact with eyes, flood repeatedly with water. In
other case, CALL PHYSICIAN IMMEDIATELY. Avoid breathing of vapor or contact
with skin. Keep away from heat, sparks, and open flame. Close container after
each use. 4bt (10-62)
Use only with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN
CONTAINS OVER 15% OF METHANOL

0007-SWP-036271

0007-SWP-000113127

INDUSTRIAL PAINT AND VARNISH REMOVER

(Face Panel)

DANGER  **POISON**

MAY BE FATAL OR CAUSE BLINDNESS IF SWALLOWED
EXTREMELY FLAMMABLE - VAPOR HARMFUL

See cautions elsewhere on the label.

(Back Panel)

CONTAINS BENZOL, ACETONE, METHANOL
CANNOT BE MADE NON-POISONOUS

If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY. Remove patient to fresh air, but have him lie down and keep warm. Cover eyes to exclude light. In case of contact with eyes, flood repeatedly with water. Keep away from heat, sparks, and open flame. Close container after each use. Avoid prolonged or repeated breathing of vapor or contact with skin.

Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

4cc (1-62)

5b (9-63)

AEROSOL PACKAGE

Conforms to new N. Y. C. F. D. requirements

See Foreword — Class 5

(Face Panel)

WARNING

REDACTED FOR
PRIVILEGE

Read caution elsewhere on label.

(Back Panel)

Do not puncture, incinerate or store above 120° F. Keep at room temperature as exposure to direct sunlight, radiators, stoves, hot water and other heat may cause bursting. Avoid breathing of vapor or repeated contact with the skin.

Use with adequate ventilation.
KEEP OUT OF THE REACH OF CHILDREN

5b (9-63)

0007-SWP-036272

0007-SWP-000113128

5br (9-63)

AEROSOL PACKAGE

Conforms to new N. Y. C. F. D. requirements

See Foreword — Class 5

(Face Panel)

**REDACTED FOR
PRIVILEGE**

(Back Panel)

CONTAINS TOLUENE

Do not puncture, incinerate or store above 120° F. Keep at room temperature as exposure to direct sunlight, radiators, stoves, hot water and other heat may cause bursting. Avoid breathing of vapor or repeated contact with skin.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

5br (9-63)

5bw (9-63)

AEROSOL PACKAGE

Conforms to new N. Y. C. F. D. requirements

See Foreword — Class 5

(Face Panel)

**REDACTED FOR
PRIVILEGE**

(Back Panel)

CONTAINS XYLENE AND TOLUENE

Do not puncture, incinerate or store above 120° F. Keep at room temperature as exposure to direct sunlight, radiators, stoves, hot water and other heat may cause bursting. Avoid breathing of vapor or repeated contact with skin.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

5bw (9-63)

0007-SWP-036273

0007-SWP-000113129

5bw2

AEROSOL PACKAGE

Conforms to new N. Y. C. F. D. requirements

See Foreword — Class 5

(Face Panel)

REDACTED
FOR PRIVILEGE

FLAMMABLE — VAPOR HARMFUL — CONTENTS UNDER PRESSURE
KEEP FROM HEAT OR FLAME

Read caution elsewhere on label.

(Back Panel)

CONTAINS TOLUENE, XYLENE, (AND LEAD)

(Do not puncture, incinerate or store above 120° F.) Keep at room temperature as exposure to direct sunlight, radiators, stoves, hot water and other heat may cause bursting. (Do not apply to any interior surfaces of a dwelling, or a place used for the care of children or on window sills, toys, cribs or other furniture which might be chewed by children.) Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking.)

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

5bw2 (9-63)

5k (9-63)

AEROSOL PACKAGE

Conforms to new N. Y. C. F. D. requirements

See Foreword — Class 5

(Face Panel)

WARNING

FLAMMABLE! CONTENTS UNDER PRESSURE

KEEP FROM HEAT OR FLAME

CONTAINS LEAD — HARMFUL IF EATEN

Read caution elsewhere on label.

(Back Panel)

REDACTED FOR
PRIVILEGE

(Do not puncture, incinerate or store above 120° F.) Keep at room temperature as exposure to direct sunlight, radiators, stoves, hot water and other heat may cause bursting. Do not apply to any interior surfaces of a dwelling, or a place used for the care of children or on window sills, toys, cribs or other furniture. Avoid breathing of vapor or repeated contact with skin.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

CALL PHYSICIAN IMMEDIATELY

5k (9-63)

0007-SWP-036274

0007-SWP-000113130

(Face Panel)

DANGER: EXTREMELY FLAMMABLE
KEEP FROM HEAT OR FLAME
CONTENTS UNDER PRESSURE—VAPOR HARMFUL
Read carefully other cautions on back panel

(BACK PANEL)

Contains Xylene
and Toluene

DO NOT PUNCTURE, INCIN-
ERATE OR STORE ABOVE 120°
F. Keep at room temperature
as exposure to direct sun-
light, radiators, stoves, hot
water, and other heat may
cause bursting. Avoid breath-
ing of vapor or repeated con-
tact with skin. Scw (2-45)
Use with adequate ventilation
KEEP OUT OF THE
REACH OF CHILDREN

Scw2 (2-65)

(Face Panel)

DANGER: EXTREMELY FLAMMABLE
KEEP FROM HEAT OR FLAME
CONTENTS UNDER PRESSURE—VAPOR HARMFUL
Read carefully other cautions on back panel

(Back Panel)

CONTAINS TOLUENE, XYLENE AND LEAD
DO NOT PUNCTURE, INCINERATE OR STORE ABOVE 120°F.
Keep at room temperature as exposure to direct sun-
light, radiators, stoves, hot water and other heat may
cause bursting. Do not apply to any interior surfaces of
a dwelling, or a place used for the care of children or
as window sill, toy, crib or other furniture which
might be chewed by children. Avoid breathing vapor or
spray mist and prolonged contact with skin. Wash thor-
oughly after handling and before eating or smoking.
Use with adequate ventilation. Scw (2-45)
KEEP OUT OF THE REACH OF CHILDREN.

REDACTED FOR
PRIVILEGE

0007-SWP-036275

0007-SWP-000113131

Non-pigmented under 150 S.S.U.'s (33 centistokes). Flash point 31°F.
150°F. T.O.C.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED — COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS PETROLEUM DISTILLATES
IF SWALLOWED, DO NOT INDUCE VOMITING
CALL PHYSICIAN IMMEDIATELY

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6a (10-62)

6aJJ (6-63)

(Back panel)

DANGER!
HARMFUL OR FATAL IF SWALLOWED
COMBUSTIBLE — CONTAINS BUTYL CELLOSOLVE
CALL PHYSICIAN IMMEDIATELY

Keep from heat and open flame. Do not transfer contents to bottles or other unlabeled containers. Close container after using.
Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6aJJ (6-63)

OPEX LACQUER-FLO

0007-SWP-036276

0007-SWP-000113132

6aw (10-62)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 81°F.
150°F. T.O.C. Contains over 10% Toluene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

VAPOR HARMFUL - COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6aw (10-62)

6aw (10-62)

Non-pigmented under (150 S.S.U.'s) (33 centistokes). Flash point 81°F.
150°F. T.O.C. Contains over 10% Toluene and Xylene.

(Face Panel)

DANGER!

HARMFUL OR FATAL IF SWALLOWED

VAPOR HARMFUL - COMBUSTIBLE

Read carefully cautions elsewhere on the label.

(Back Panel)

CONTAINS TOLUENE AND XYLENE

IF SWALLOWED, DO NOT INDUCE VOMITING

CALL PHYSICIAN IMMEDIATELY

Keep away from heat and open flame. Avoid prolonged breathing of vapor or spray mist. Do not transfer contents to bottles or other unlabeled containers. Close container after using.

Use with adequate ventilation.

KEEP OUT OF THE REACH OF CHILDREN

6aw (10-62)

0007-SWP-036277

0007-SWP-000113133

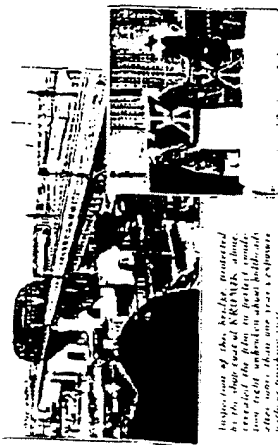


Illustration of this building, protected with Kromik Metal Primer, shows the excellent protection it affords against rusting and decay.

KROMIK METAL PRIMER

Is distinctively an original Sherwin-Williams formulation. In kromik, which is a composite paint, all the desirable properties of tinley of iron, red lead and basic lead chromates have been blended to obtain a paint that has repeatedly demonstrated most unusual value as a metal protective paint in all parts of the world.

APPLICATION:

By brush—use full body.
By spray—Reduce up to 12-14 with 0074 or naptha.

COLOR:

Golden Brown.

GLOSS:

(1) Finish.

DRYING:

To touch—4 hours
To recoat—24 to 36 hours

HIDING:

Good, one coat, solid, two coats.

COVERING CAPACITY:

Structural steel for bridges, 1 lb. in the gallon. For buildings, 2 1/2 lb. in the gallon. For surfaces 600 to 700 square feet in the gallon, one coat.

FINISHING COATS:

Use Metalum or any other metal protective paint meeting the requirements of customer.

WHERE TO REACH US

ADMINISTRATION OFFICES
100 Prospect Ave., H. W. Cleveland, Ohio.

WAREHOUSES AND OFFICES

Albany, Tenn.	Manfield, Ohio
Albany, N. Y.	Memphis, Tenn.
Albany, Pa.	Mexico City, Mex.
Albany, Texas	Minneapolis, Minn.
Albany, Ohio	Montreal, Que., Canada
Albany, Mo.	Montreal, N. Y.
Albany, Ind.	Newark, N. J.
Albany, Ill.	New York, N. Y.
Albany, Ky.	New York, N. Y.
Albany, La.	New York, N. Y.
Albany, Me.	New York, N. Y.
Albany, Mass.	New York, N. Y.
Albany, Mich.	New York, N. Y.
Albany, Minn.	New York, N. Y.
Albany, Mo.	New York, N. Y.
Albany, Neb.	New York, N. Y.
Albany, N. Y.	New York, N. Y.
Albany, Va.	New York, N. Y.
Albany, W. Va.	New York, N. Y.
Albany, Wis.	New York, N. Y.
Albany, Wyo.	New York, N. Y.
Albany, Z.	New York, N. Y.
Albany, A.	New York, N. Y.
Albany, B.	New York, N. Y.
Albany, C.	New York, N. Y.
Albany, D.	New York, N. Y.
Albany, E.	New York, N. Y.
Albany, F.	New York, N. Y.
Albany, G.	New York, N. Y.
Albany, H.	New York, N. Y.
Albany, I.	New York, N. Y.
Albany, J.	New York, N. Y.
Albany, K.	New York, N. Y.
Albany, L.	New York, N. Y.
Albany, M.	New York, N. Y.
Albany, N.	New York, N. Y.
Albany, O.	New York, N. Y.
Albany, P.	New York, N. Y.
Albany, Q.	New York, N. Y.
Albany, R.	New York, N. Y.
Albany, S.	New York, N. Y.
Albany, T.	New York, N. Y.
Albany, U.	New York, N. Y.
Albany, V.	New York, N. Y.
Albany, W.	New York, N. Y.
Albany, X.	New York, N. Y.
Albany, Y.	New York, N. Y.
Albany, Z.	New York, N. Y.

CC311 R21 354

SHERWIN-WILLIAMS

KROMIK

METAL PRIMER

**FOR METAL SURFACES
EXPOSED TO THE WEATHER**

0007-SWP-035660