

MISCELLANEOUS ACCESSORIES AND COMPONENTS





A-c and D-c Solenoid Operated Magnetic Shoe Brakes

WHEN ORDERING SPECIFY

- Catalog number of brake
- Catalog number of wheel

TYPE S BRAKES—Price Includes Wheel

Torque—Ft. Lbs.		Brake Size	60 Cycle A-c ⊗					D-c			
Contin-uous	Inter-mittent		Catalog Number					Price	Catalog Number		Price
			110 V.	208 V.	220 V.	440 V.	550 V.		120 V.	240 V.	
3	3	S-4	511- H583	511- H608	511- H584	511- H585	511- H586	\$78.	511- H691	511- H692	\$86.
10	10	S-4	H647	H664	H648	H649	H650	86.	H693	H694	144.
---	15	S-4	H723	H704	H724	H725	H726	86.	H695	H696	144.
25	25	S-5½	H754	H803	H755	H756	H757	148.	H827	H828	180.
---	35	S-5½	H766	---	H767	H768	H769	148.	H829	H830	180.
50	50	S-7	H833	H882	H834	H835	H836	238.	H902	H903	256.
---	75	S-7	H845	---	H846	H847	H848	238.	H904	H905	256.
125	125	S-10	H909	---	H910	H911	H912	806.	---	---	---
---	160	S-10	H922	---	H923	H924	H925	806.	---	---	---

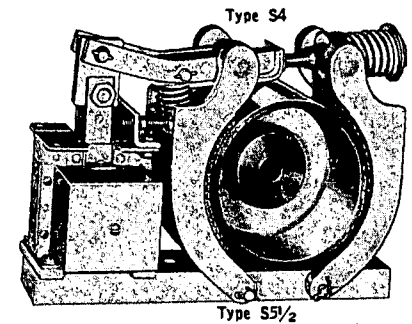

STANDARD WHEELS ③

4" Brake Wheels—Price \$18.50 ⑦				5½" Brake Wheels—Price \$30.00 ⑦				7" Brake Wheels—Price \$50.00 ⑦				10" Brake Wheels—Price \$124.00 ⑦			
Bore (Inches)	Keyway (Inches)	Set Screw	Catalog Number	Bore (Inches)	Keyway (Inches)	Set Screw	Catalog Number	Bore (Inches)	Keyway (Inches)	Set Screw	Catalog Number	Bore (Inches)	Keyway (Inches)	Set Screw	Catalog Number
.499-.500	None	None	511- H1101-1	.749-.750	None	None	511- H1102-1	.749-.750	None	None	511- H1103-1	1½ to 3 inches	To Suit	To Suit	Order Wheel By Description
.499-.500	⅜x⅜	¼-20	H1101-2	.749-.750	⅜x⅜	¼-20	H1102-2	.9365-.9375	⅜x⅜	¼-20	H1103-2				
.624-.625	⅜x⅜	¼-20	H1101-3	.936-.937	⅜x⅜	¼-20	H1102-3	.999-1.000	⅜x⅜	¼-20	H1103-3				
.749-.750	⅜x⅜	¼-20	H1101-4	.999-1.000	⅜x⅜	¼-20	H1102-4	1.061-1.062	⅜x⅜	¼-20	H1103-4				
.749-.750	⅜x⅜	¼-20	H1101-5	1.124-1.125	⅜x⅜	¼-20	H1102-5	1.124-1.125	⅜x⅜	¼-20	H1103-5				
.749-.750	None	None	H1101-6	1.186-1.187	⅜x⅜	¼-20	H1102-6	1.186-1.187	⅜x⅜	¼-20	H1103-6				
.874-.875	⅜x⅜	¼-20	H1101-7	1.249-1.250	⅜x⅜	¼-20	H1102-7	1.249-1.250	⅜x⅜	¼-20	H1103-7				
.874-.875	⅜x⅜	¼-20	H1101-8	1.374-1.375	⅜x⅜	¼-18	H1102-8	1.249-1.250	⅜x⅜	¼-18	H1103-8				
.999-1.000	⅜x⅜	¼-20	H1101-9	1.436-1.437	⅜x⅜	¼-20	H1102-9	1.436-1.437	⅜x⅜	¼-18	H1103-9				
.999-1.000	⅜x⅜	¼-20	H1101-10	1.499-1.500	⅜x⅜	¼-20	H1102-10	1.499-1.500	⅜x⅜	¼-20	H1103-10				
.999-1.000	None	None	H1101-11	1.574-1.575	½x½	½-13	H1102-11	1.499-1.500	⅜x⅜	¼-18	H1103-11				
1.124-1.125	⅜x⅜	¼-20	H1101-12	1.574-1.575	½x½	½-16	H1102-12	1.624-1.625	⅜x⅜	¼-18	H1103-12				
1.186-1.187	⅜x⅜	¼-20	H1101-13	1.624-1.625	⅜x⅜	¼-18	H1102-13	1.749-1.750	⅜x⅜	¼-18	H1103-13				
1.249-1.250	⅜x⅜	¼-20	H1101-14	1.686-1.687	⅜x⅜	¼-18	H1102-14	1.874-1.875	½x½	½-16	H1103-14				
1.374-1.375	⅜x⅜	¼-18	H1101-15	1.749-1.750	⅜x⅜	¼-20	H1102-15	1.936-1.937	½x½	½-16	H1103-15				
1.374-1.375	None	None	H1101-16	1.936-1.937	½x½	½-16	H1102-16	1.999-2.000	½x½	½-16	H1103-16				
1.374-1.375	⅜x⅜	¼-20	H1101-17	1.999-2.000	½x½	½-16	H1102-17	2.124-2.125	½x½	½-16	H1103-17				
								2.249-2.250	½x½	½-13	H1103-18				

⑦ When purchased separately. Brake price includes wheel.

③ WR² of wheels: 4"—.057; 5½"—.26; 7"—.77; 10"—3.1.

OPTIONAL FEATURES ①

Brake Size	Torque—Ft. Lbs.		Non-Corrosidible Fittings	Drip-proof Cover	Manual Release ②	Tapered Bore In Standard Wheel ③	Charge For Special Wheel	Watertight or Dusttight NEMA 4 and 5 Enclosure ④	Omission Price of Wheel	Class B Insulation A-c Only	⑤ For Voltage or Frequency Other Than Shown
	Contin-uous	Inter-mittent									
S-4	3	3	\$9.	\$64.	\$46.	\$26.	\$26.	\$100.	\$18.50	---	\$6.
S-4	10	15	12.	64.	46.	26.	26.	100.	18.50	⑥	7.
S-5½	25	35	19.	74.	46.	33.	37.	120.	30.	\$12.	12.
S-7	50	75	40.	74.	46.	37.	44.	120.	50.	19.	19.
S-10	125	160	88.	94.	---	---	62.	282.	124.	35.	35.

① Other optional features: D-c series wound brakes, prices on application.

② Non-automatic reset manual release can be provided on bulletin S11 brakes with water tight or dust tight covers. Add \$44. to manual release prices to cover necessary stuffing box.

③ These are price additions to price of brake with standard wheel.

④ When ordering NEMA 4 or 5 enclosure, specify shaft size.

⑤ Minimum voltage on D-c, 24 volts.

⑥ Class B coil available on 15 lb. ft. S-4 brake all models and 10 lb. ft. on 25 cycle only at \$7.00 list.

⑦ For 50 or 25 cycles, consult factory.

DISCOUNT SCHEDULE 1 CD

CUTLER-HAMMER