


UNITED STATES RADIATOR CORPORATION

General Offices: Detroit, Michigan • Branches and Sales Offices in Principal Cities

Detroit, Michigan

CAPITOL RED TOP BOILERS

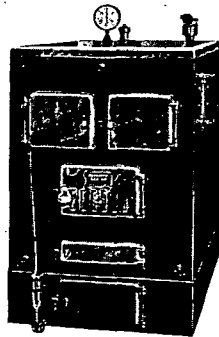

"B" Series Jacketed Boiler

"A" Series—All Fuels

Boiler No.	I-B-R Sq Ft Direct Cast-Iron Radiation	
	Steam	Water
A-7	340	545
A-8	440	705
A-9	540	865
A-10	640	1025
A-11	740	1185

"B" Series—All Fuels

Boiler No.	Steam	Water
B-7	740	1180
B-8	920	1470
B-9	1110	1770
B-10	1275	2040
B-11	1440	2300
B-12	1580	2530
B-13	1730	2770
B-14	1880	3000

"C" Series—All Fuels


Boiler No.	Direct Cast-Iron Radiator Loads Sq Ft	
	Steam	Water
C-12	2250	3600
C-14	2715	4345
C-16	3180	5090
C-18	3645	5830
C-20	4110	6575
C-22	4575	7320
C-24	5040	8065
C-26	5450	8720
C-28	5860	9280
C-30	6110	9775

NO. 3 SERIES SUNRAY



U. S. Sunray No. 3 Series

Boiler Number	I-B-R Sq Ft Direct Cast Iron Radiation					
	Hand Fired		Stoker Fired		Oil Fired	
	Steam	Water	Steam	Water	Steam	Water
43-S or W	300	480	400	640	400	640
53-S or W	450	720	550	880	550	880
63-S or W	600	960	700	1120	700	1120

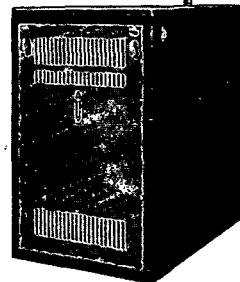

U. S. 25 Series Oil Burning Boiler


Boiler No.	Net I-B-R Sq Ft Direct Cast-Iron Radiation		Net I-B-R Btu	Gross I-B-R Output Btu
	Steam	Water		
US-25-3	545	875	131,000	198,000
US-25-4	905	1450	217,000	317,000
US-25-5	1255	2025	304,000	435,000
US-25-6	1625	2500	390,000	554,000
US-25-7	1985	3175	476,000	672,000

UNITED STATES RADIATOR CORPORATION

General Offices: Detroit, Michigan • Branches and Sales Offices in Principal Cities


Detroit, Michigan

CAPITOL SUNRAY No. 2 SERIES OIL FIRED BOILER



Boiler No.	Net I-B-R Sq Ft Direct Cast-Iron Radiation		Net I-B-R Btu	Gross I-B-R Output Btu
	Steam	Water		
2-03	350	560	84,000	129,000
2-04	500	800	120,000	182,000
2-05	650	1040	156,000	234,000
2-06	800	1280	192,000	285,000


"DEEPIRE" HOT WATER SUPPLY BOILERS Coal Fired



Tested to
260 lb Hydrostatic
Pressure for
100 lb Working
Pressure.

Boiler No.	Capacity—Gallons		
	100° Rise 6 Hours	85° Rise 1 Hour	100° Rise 1 Hour
30	792	155	132
40	1512	297	252
50	2160	423	360
60	2700	529	450


CAPITOL SQUARE SECTIONAL BOILERS

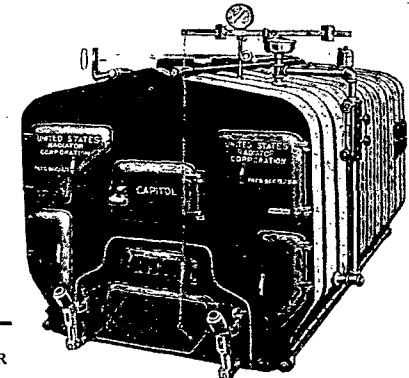

40 In. Series—Smokeless—Hand Fired

Boiler No.	Direct Cast Iron Radiator Loads Sq Ft		Grate Area Sq Ft	Coal Capacity Cu Ft	Out-lets Height Ft	Min. Chimney Sizes Dim. Inches	
	Steam	Water				Height	Dim.
740	2480	3970	8.15	10.40	2-5"	50	18x18
840	3070	4910	10.31	13.30	2-5"	55	18x20
940	3660	5855	10.31	13.30	3-5"	60	20x20
1040	4250	6800	12.47	16.30	3-5"	65	20x24
1140	4820	7710	14.63	19.25	3-5"	70	24x24
1240	5320	8510	14.63	19.25	3-5"	70	24x28
1340	5800	9280	16.79	22.20	3-5"	75	24x28

*CAPITOL THINTUBE RADIATORS



3-Tube	
Heights In.	Per Section Heating Surface
25	1.6 Sq Ft

4-Tube	
22	1.8 Sq Ft
25	2.0 Sq Ft

5-Tube	
22	2.1 Sq Ft
25	2.4 Sq Ft

6-Tube	
19	2.3 Sq Ft
25	3.0 Sq Ft
32	3.7 Sq Ft

*1 1/4 in. Centers.

40 per cent less space needed for these graceful, efficient Capitol ThinTube Radiators.

LITERATURE UPON REQUEST