


ONE

GALLON

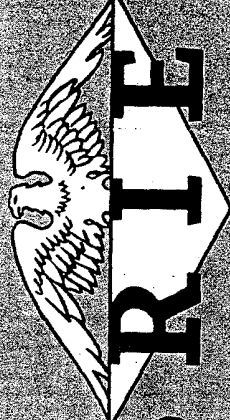

O'BRIEN'S

"75" HOUSE PAINT

FOR ANY EXTERIOR SURFACE

EVERGREEN
(CLEAR GREEN)

75 HOUSE PAINT — EVERGREEN	
Pigment	43.40%
C. P. Chrome Green	13.50%
Yellow Iron Oxide—Hydroxide	2.40%
C. P. Chrome Yellow	2.95%
Barium Sulfate	59.70%
Iron Blue	1.75%
Magnesium Silicate	14.97%
Vehicle	100.00%
Processed Linseed Oil	55.50%
Varnish	25.80%
Mineral Spirits & Diluents	18.86%
	100.00%
11 Varnish	
Neocladite, Thermozed Tung Oil,	52.05%
Phenolic Resin	2.15%
Volatiles Mineral Spirits	3.35%
Xylol	1.62%
Turpentine	
	100.00%

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND INDIANA • BALTIMORE, MARYLAND

O'BRIEN'S "75" HOUSE PAINT

O'Brien's "75" House Paint represents the very finest in top quality exterior paint. Made with patented Pre-Shrunk Thermolyzed Oils, it looks better longer on any type of exterior surface — wood siding, wood shingles, aluminum siding, fences, wood trim, asbestos shingles, stucco, brick, concrete, metal. Extra plus features which make this quality paint a standout and favorite among painters and homeowners include — unbelievable hiding, greater coverage, easier brushing and more years service. Tested and proven on thousands of homes, "75" House Paint is America's best house paint value.

"75" HOUSE PAINT PRIMING WHITE

This is a specially formulated undercoat for use on exterior surfaces under "75" House Paint and other similar products. It controls the penetration of the oils in the paint applied over it, and dries dull permitting fast application of the finish coat. Easy to apply, its tremendous hiding provides a perfect base for final coat.

NOTE—In normal painting weather (72 F. or higher) Priming White should be allowed to dry 48 hours before being painted over. When applied at temperatures below 70 F. add two fluid ounces of O'Brien's No. 1188 Drier to each gallon. Below 50 F. add four ounces. Do not use this material on interior surfaces.

WARNING: May contain lead compound. Wash thoroughly after handling and before eating or smoking. Avoid breathing dust. Do not take internally.

DIRECTIONS FOR USE

FOR NEW UNPAINTED SURFACES

1st Coat — O'Brien's "75" House Paint Priming White thinned with two or three pints of raw linseed oil.

2nd Coat — Mixture of one-half "75" House Paint Priming White and one-half "75" House Paint of the finish color.*

3rd Coat — O'Brien's "75" House Paint.

* This coat may be eliminated where time and cost necessitate a two-coat job.

FOR OLD PAINTED SURFACES

1st Coat — O'Brien's "75" House Paint Priming White. Tint to the approximate color of the finish coat.*

2nd Coat — O'Brien's "75" House Paint.

** For light colors tint Priming White with O'Brien's Oil Colors. For dark colors mix one-half Priming White and one-half "75" House Paint of the finish color.

GENERAL RECOMMENDATIONS

WEATHER — Outside painting should never be done when the weather is damp or the temperature below 60° F.

SURFACES — Surfaces to be painted should be perfectly dry and free of grease, oil, dust and loose dirt. SPRAYING — "75" House Paint may be sprayed by an experienced operator.

DRYING—Allow at least 48 hours good drying weather between coats. When temperature is low, add two fluid ounces of O'Brien's No. 1188 Drier to each gallon. Stir Paint Well Before and During Use. When Necessary — Thin with Turpentine or O'Brien's Reduct.

Inflammable — Keep Away From Fire

THE O'BRIEN CORPORATION
SOUTH BEND, IND. BALTIMORE, MD.
OKLAHOMA CITY, OKLA.