PLAINTIFF'S EXHIBIT

USG-1797



TEXOLITE PASTE SPACKLING PUTTY

An economical, all-purpose putty – ready to use – for patching or leveling small cracks, knicks, scars in most interior surfaces. Especially fine for hair-line cracks in wood or plaster and smoothing up dry-wall work.

CHARACTERISTICS

No waste in mixing – use as required direct from can. Dries to a smooth, hard finish which sands easily but will not crumble, shrink or crack.

FORM

Ready to use.

PRIMING


Takes any standard priming material.

USES

For fine patching in wood, plaster, drywall and interior concrete surfaces. Use putty knife, broad knife, brush or caulking gun. The solution to small surface imperfections and for repairing furniture, toys, wall fabrics, mosaic, knotholes, etc.

GP003 20RR

INTERIOR TEXTURE FINISHES

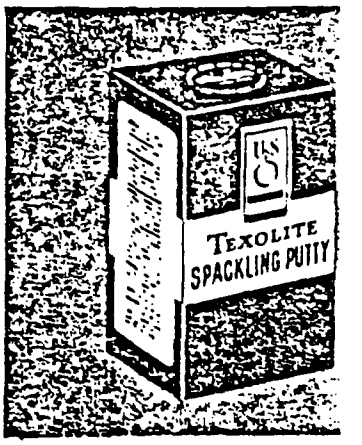

TEXOLITE Spackling Putty

A general purpose putty for fi
ing, patching or buildi
painted or unpainted interi
face imperfections in prepar
for painting or other decoratic
Produces a smooth, even surfa
and is economical and easy to us

Characteristics:

Forms a tough, durable surfa
and dries hard within a few hou
Exceptionally fine grind—free
grit. Applied with either put
knife or brush and may be sande
when dry and hard. Adheres
practically any solid surface th
is clean and sound.

Form:

Paste or powder.

Priming:

Takes any standard priming m
terial.

Uses:

For filling small cracks, scars, or
slight surface imperfections
plaster, tile or mosaics, and co
crete. Fills nicks, cracks, knothol
and nail holes in wood. Is used
repair joints and surfaces in furn
ture, toys, etc. May also be use
to fill canvas and wall fabrics or
makes excellent Swedish Putty

GF03 2094



Product	Approximate Weight
TEXOLITE Spackling Putty	
1 lb. (24 pkgs. per carton)	27
5 lbs. (6 pkgs. per carton)	31
25 lbs. (Single bags)	25
½ Pint (12 cans per carton)	19
Qt. (6 cans per carton)	22

Product | Approximate Weight

CF003 2092