


ONE

GALLON

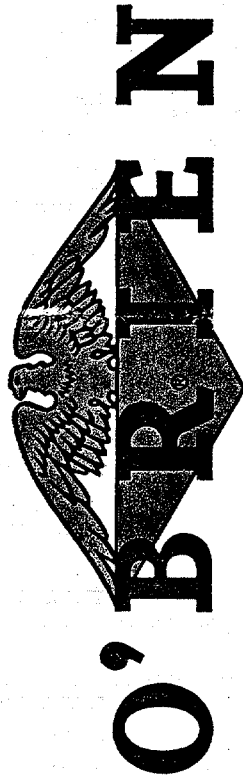

Acrytex

HOUSE **LATEx** PAINT

FOR WOOD AND MASONRY SURFACES

EXTERIOR
WOOD PRIMER

MADE BY THE O'BRIEN CORPORATION

SOUTH BEND, IND. • BALTIMORE, MD. • OKLAHOMA CITY, O.K.A. • SAN FRANCISCO, CAL. • LOS ANGELES, CAL.

ACRYTEX Wood Primer

For New or Previously Painted Exterior
Wood Surfaces

Acrytex Wood Primer is an oil base pigmented primer that must be used over either new or previously painted exterior wood before applying Acrytex latex paint. Wood Primer provides a perfectly sealed, blister-resistant surface that will add years to the life and beauty of Acrytex.

Acrytex Wood Primer absorbs chalk on a previously painted wood surface, bites into the film and assures good adhesion for Acrytex latex. Wood Primer is especially formulated to preserve and protect raw wood.

DIRECTIONS FOR USE

For New or Previously Painted Exterior Wood

1st Coat — Apply Acrytex Wood Primer as it comes from the can.

2nd Coat — After Acrytex Wood Primer has dried 48 hours, apply Acrytex latex as it comes from the can.

3rd Coat — Apply Acrytex latex as it comes from the can. Allow previous coat to dry at least one hour before recoating.

Surface Preparation — All dirt, loose and peeling paint must be removed. Be certain no moisture is present before applying Acrytex Wood Primer.

Application — Apply Acrytex Wood Primer with a good bristle brush in temperature not less than 60°F. Thinning is not recommended. If thinning is preferred, use O'Brien's Reducit, turpentine or mineral spirits. **Do not use water.**

Drying — 48 hours good drying weather is recommended.

IMPORTANT: Do not apply Acrytex Wood Primer over a previous paint film that is not properly adhering to the surface or over a surface with structural defects that allows moisture to penetrate behind the film. The Acrytex system will not correct the poor adhesion of previous paint.

DO NOT TAKE INTERNALLY

CAUTION! COMBUSTIBLE!
CONTAINS LEAD. HARMFUL IF

SWALLOWED. Keep away from heat and open flame. Do not

apply on window sills, toys, furniture or interior surfaces of rooms which may be used by

children. Avoid prolonged contact with skin and breathing of

vapor or spray mist. Close container after each use. Use with

adequate ventilation. KEEP OUT OF THE REACH OF

CHILDREN.

ACRYTEX WOOD PRIMER	
Pigment	60.14%
Titanium Dioxide	17.19%
White Lead	7.92%
White Lead Oxide	5.13%
Calcium Carbonate	100.00%
Silicates	100.00%
Vehicle	79.85%
Mineral Spirits	20.14%
Mineral Spirits & Driers	20.21%
	100.00%

KEEP FROM FREEZING.
STIR THOROUGHLY BEFORE USE.

DATE 1-22-63
REGION 2513B