

ating system
Frequency
ken to avoid

which bears
ther systems
selective-pole
lines if they
and faults or
es one line
although not
ers tendency
art in speed
lects correct
d.
ner a breaker
ing waves at
uses one relay
one for each,
are needed
a discrimina-
et an out-of-
Westinghouse
burgh, Pa.




HAL. halves,
sp for small
knife fashion
sition with a
vents lonsen-
ice. *Burd*
heavily silver-
efficiency and
ion.
mmodate ten
smaller sizes
cable sockets
out insulation
107 *Bruckner*

ventilating air
ently and/or
ent as carbon
machines may
d decrease in-
normal brush
uer need be
a year. Clean-
flowing water
Westinghouse
tsburgh, Pa.

/ Scale

has standard
head, tare and
weights to pro-
pacity. By ro-
cabinet front
crements, each
t capacity, can
increase gross
e. Weight in-

February, 1945

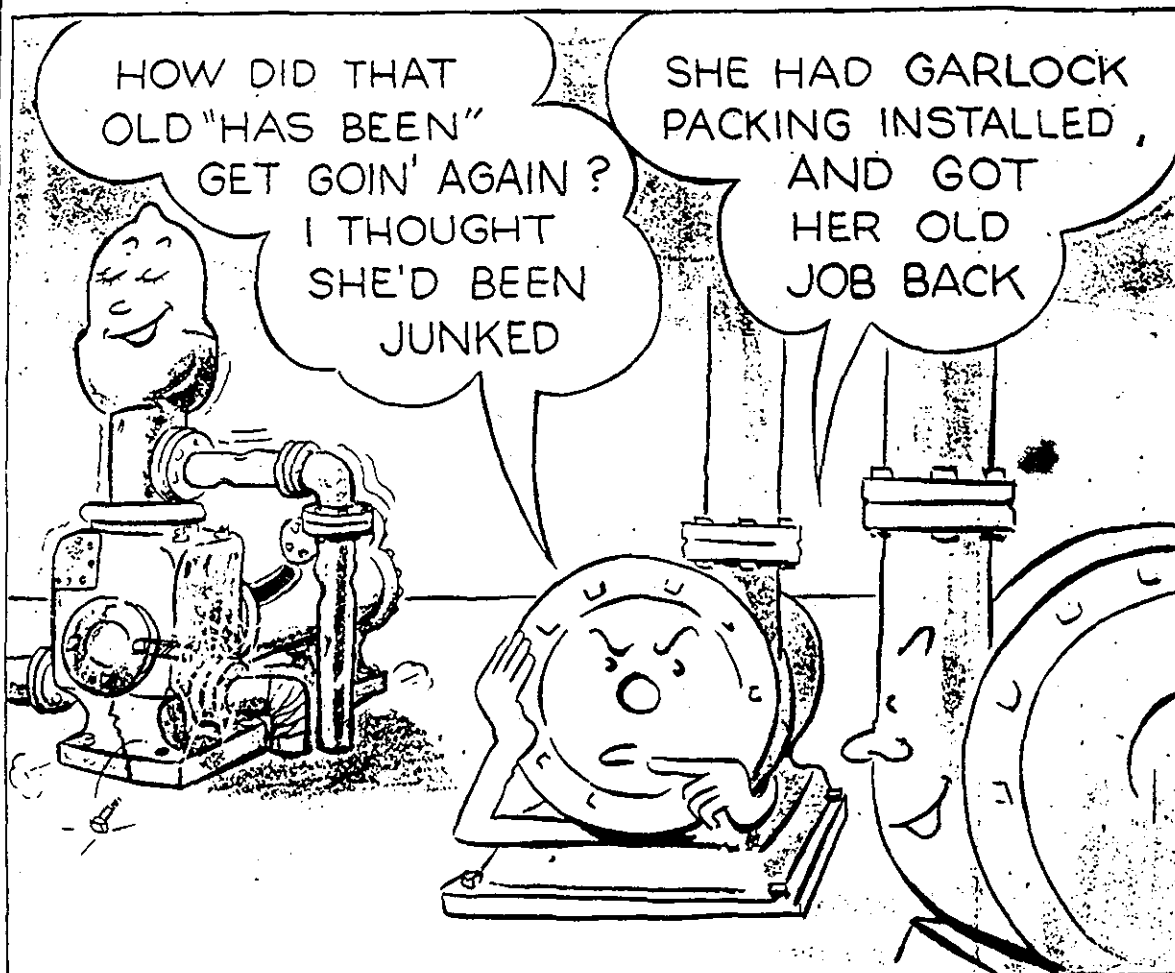

CHEVRON Packing

Yes, Garlock CHEVRON automatic action packing has proved itself on thousands of applications in general industry throughout the country. The unique hinge-like, cross-sectional design allows the packing to expand and contract—the greater the pressure, the tighter it packs. You can always depend on CHEVRON for superior performance.



THE GARLOCK PACKING COMPANY
PALMYRA, NEW YORK

In Canada: The Garlock Packing Company
of Canada Limited, Montreal, Que.

Garlock

PLAINTIFF'S
EXHIBIT

G-57