

WHITE
1892

Glidden

Endurance Non-Chalk
MILDEW-RESISTANT

HOUSE PAINT

FOR SIDING, TRIM, SHUTTERS AND


CAUTION! COMBUSTIBLE!

CONTAINS LEAD. HARMFUL IF SWALLOWED.
Keep away from heat and open flame.
Do not apply on toys, furniture, window
sills or other interior surfaces of rooms
which may be used by children. Avoid
prolonged contact with skin and breath-
ing of vapor or spray mist. Close con-
tainer after each use.

Use With Adequate Ventilation.
KEEP OUT OF THE REACH OF CHILDREN.

14-62

Made in U.S.A.

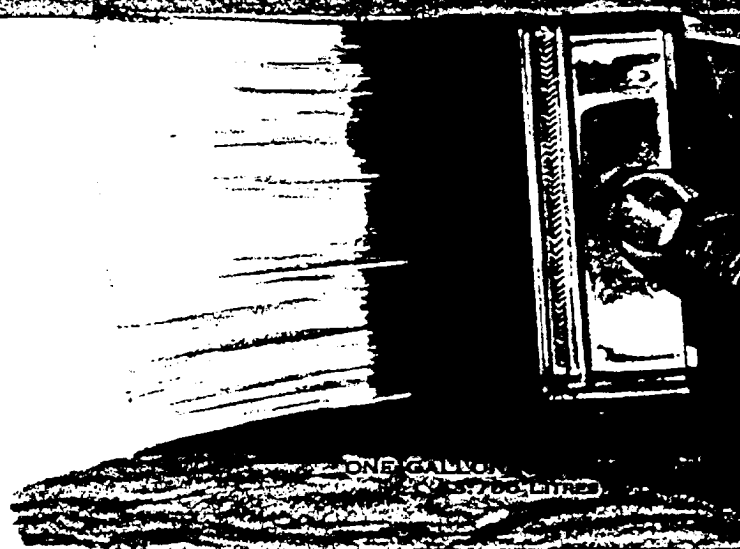

6/64 10/12-993

Contains added pantothenate to make this tablet resistant to the action of Mallowin. Growing list of our new patients.

Di (Phenylmercury)
Dose: 0.05%
Succinate 0.05%
Inert ingredients 99.90%
Resistant to Mallowin and
the Pain Film only.

100.00%

SURFACE PREPARATION: New wood must be cured, dry and clean. Prime all knots with shellac reduced one to one with denatured alcohol. Prime with GLIDDEN 1851 EXTERIOR BASE COAT as directed for usage. Putty all cracks, nail holes and open joints. Caulk casings and chimneys where necessary.

before using by stirring with a lifting motion or by boxing (pouring from one container to another several times). ENDURANCE WHITE HOUSE PAINT NON-CHALKING should be applied without thinning, although thinning with one-half pint of turpentine or mineral spirits per gallon is permissible when using over extremely

FINISH COATS: Apply one or two coats EN-DURANCE NON-CHALKING WHITE without thinning, allowing 48 hours drying time between coats.

hot or very cool surfaces. Compatible with DRAMATONE MULTI-PURPOSE TINTING COLORS and COLORS-IN-OIL.

PREVIOUSLY PAINTED WOOD surfaces in good repaint condition need only be clean. Painted surfaces that are badly worn, heavily chalked, cracked, blistered, flaking or peeling should be wire brushed, scraped or burned off to the bare wood. Prime these areas with **GLIDDEN 1851 EXTERIOR BASE COAT**.

FINISH COATS: Follow directions for new wood.

MATERIAL PREPARATION: Mix thoroughly

evenly, working paint well into surface of one board at a time. After spreading, make light finishing strokes. For best performance, do not cover more than 550 square feet of surface with each gallon of paint. To spray, reduce 10%-15% with turpentine or mineral spirits and use 30 to 40 pounds air pressure.

L. C. 465

L.C. 465

THE GLIDDEN COMPANY

CLEVELAND, OHIO - U.S.A.

GLD010699