

The Dole Valve Company

Plumbing and Heating Division 1933 Carroll Avenue, Chicago 12, Ill.

Control with

WATER MIXERS
AUTOMATIC REGISTERS


Dole

THE ALL STAR LINE
AIR AND VACUUM
VALVES



Dole 20 Sr. Vent

This high-quality hot water air valve is designed to provide an automatic air eliminator, a manual shutoff and a manual air vent. A Dole design developed on the hygroscopic principle by The Dole Valve Company. A selector dial permits various settings and provides for faster venting. One of a complete line of Dole Hot Water Air Valves.




Dole No. 100 Water Mixer

Here is a new water mixing valve utilizing the famous Dole element which gives extra power. It is noncorrosive and trouble-free. The No. 100 is made of a brass forging and yet despite its high quality is low in cost, making it a top value. Nonadjustable. 140 deg setting.

Designed for installation at the water heater or storage tank.

Dole Air Valves

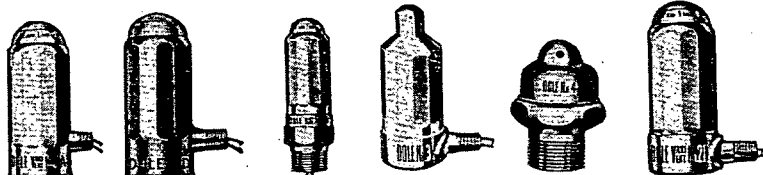

The complete Dole line includes air valves for every type of heating system. Below are six typical valves from the line.

DOLE NO. 1 A VARI-VENT—adjustable valve that provides an infinite number of venting speeds.

DOLE NO. 1 D—a very fast venting, fixed-orifice, nonadjustable air valve. Factory-set to vent two or three times as fast as regular type air valves.

DOLE NO. 1 B VARI-VENT—provides better control of heat on convector type

radiation where faster venting is essential.

DOLE NO. 3—designed to assure utmost heating performance on hand-fired steam heating systems. Complete venting is assured at any pressure up to 10 lbs.

DOLE NO. 4 QUICK VENT VALVE—for quick venting steam mains and returns up to 25 lbs pressure.

DOLE 2 B VARI-VENT VACUUM VALVE—for use on hand-fired gravity one-pipe steam heating systems. Has the Dole patented bellows that locks air out once it has been expelled.

Dole Water Mixers

Dole Water Mixers provide safer tempered domestic hot water on all tankless heaters and storage tank installations. Available in three sizes: $\frac{1}{2}$ in., $\frac{3}{4}$ in. and 1 in.; adjustable range—125 to 175 deg F.

Dole Automatic Register

Provides individual room temperature control. Operates thermostatically from room air temperature. Completely self-contained. Dial permits setting for the heat desired. Made in sizes to fit practically any stack-head opening.

The Fairbanks Company



393 Lafayette Street

New York 3, N. Y.

Boston; Pittsburgh; Binghamton, N. Y.; Rome, Georgia

Dependable Service GUARANTEED From This Complete Line Of Bronze And Iron Body Valves Available From Your Local Distributor

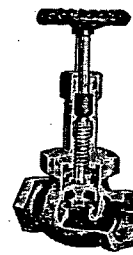


Fig. U-01
150 lb SWP

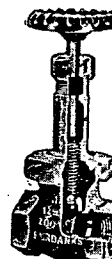


Fig. U-0258
125 lb SWP

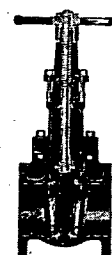


Fig. 0405
125 lb SWP



Fig. 0702
125 lb SWP

BRONZE GLOBE AND ANGLE VALVES

Pressures—125 through 300 lbs S.W.P.

Ends—Screwed, Flanged, Solder, Brazed and Hose.

Discs—Bronze: Renewable Composition; Nickel Alloy Semi-Plug Disc and Seat; Stainless Steel Semi- and Full Plug Disc and Seat.

Needle Valves

Radiator Valves

LP—Gas and Oxygen Valves

BRONZE GATE VALVES

Pressures—125 through 300 lbs S.W.P.

Ends—Screwed, Flanged, Solder, Brazed and Hose.

Stem Action—Rising with Solid or Split Wedges, Non-Rising with Solid Wedges.

Bonnets—Screwed, Union, Bolted and O. S. & Y.

Radiator Valves

LP—Gas Valves

BRONZE CHECK VALVES

Horizontal, Angle and Vertical

Types—Swing and Lift

Pressures—125 through 300 lbs S.W.P.

Ends—Screwed, Flanged, Solder and Brazed.

Discs—Bronze, Renewable Composition, Rubber Faced.

LP—Gas Valves

IRON BODY GLOBE & ANGLE VALVES

Bronze Mounted

Pressures—125 through 250 lbs S.W.P.

Ends—Screwed and Flanged

Discs—Bronze, Renewable Composition, Nickel Alloy Semi-Plug Disc and Seat

Bonnets—O. S. & Y. and Union

Automatic Stop and Check Valves

IRON BODY GATE VALVES

Bronze Mounted and All Iron

Pressures—125 through 250 lbs S.W.P.

Ends—Screwed, Flanged and Hub

Stem Action—Rising, Non-Rising and Quick Opening

Bonnets—Screwed, U-Bolt, Bolted & O. S. & Y.

Underwriters' and AWWA Approved Valves

IRON BODY SWING CHECK VALVES

Horizontal—Bronze Mounted

Pressures—125 through 250 lbs S.W.P.

Ends—Screwed, Flanged and Hub

Discs—Bronze, Bronze Faced and Rubber or Leather Faced

Underwriters' Approved Valves.