

TABLE 2. HEAT-CARRYING CAPACITY OF STANDARD BLACK PIPES
WITH TEMPERATURE DROP OF 20 DEG^aNominal Pipe Sizes $\frac{3}{8}$ in. to 12 in., and Friction $\frac{1}{4}$ to 800 milinches per foot (A = Capacity, Mbh. B = Velocity, inches per second) (One milinch equals 0.001 in.)

MILINCH FRICTION LOSS PER FOOT OF PIPE		NOMINAL PIPE SIZE, INCHES															
		$\frac{3}{8}$	$\frac{1}{2}$	$\frac{3}{4}$	1	1 $\frac{1}{4}$	1 $\frac{1}{2}$	2	2 $\frac{1}{2}$	3	3 $\frac{1}{2}$	4	5	6	8	10	12
4	A	0.75	1.35	2.85	5.4	11.3	17.0	33.0	53.1	95	141	197	363	596	1250	2320	3730
	B	1.5	1.7	2.1	2.4	2.9	3.2	3.8	4.3	5.0	5.5	6.0	7.0	7.9	9.6	11	12
6	A	0.9	1.7	3.6	6.75	14.0	21.2	41.3	66.4	119	176	248	456	748	1570	2920	4690
	B	1.8	2.1	2.6	3.0	3.6	4.0	4.7	5.3	6.2	6.9	7.5	8.8	10	12	14	16
8	A	1.05	2.0	4.2	7.9	16.4	24.8	48.4	77.9	140	207	291	535	879	1850	3440	5520
	B	2.1	2.5	3.0	3.5	4.2	4.7	5.6	6.3	7.3	8.0	8.8	10	12	14	17	19
10	A	1.2	2.2	4.7	8.9	18.6	28.0	54.7	88.1	158	234	329	605	997	2100	3910	6270
	B	2.4	2.8	3.4	4.0	4.8	5.3	6.3	7.1	8.2	9.1	9.9	12	13	16	19	27
12	A	1.35	2.45	5.2	9.8	20.5	31.0	60.4	97.4	175	259	364	671	1100	2320	4330	6950
	B	2.7	3.1	3.7	4.4	5.3	5.9	6.9	7.8	9.1	10	11	13	15	18	21	24
14	A	1.45	2.65	5.65	10.7	22.3	33.7	65.8	106	190	282	397	731	1200	2530	4730	7590
	B	2.9	3.4	4.1	4.8	5.7	6.4	7.6	8.5	9.9	11	12	14	16	20	23	26
16	A	1.55	2.85	6.05	11.5	24.0	36.3	70.8	114	205	303	428	787	1300	2730	5100	8190
	B	3.1	3.6	4.4	5.1	6.2	6.9	8.1	9.7	11	12	13	15	17	21	25	28
20	A	1.75	3.25	6.85	13.0	27.1	41.0	80.0	129	232	344	484	892	1470	3100	5790	9300
	B	3.5	4.1	4.9	5.8	7.0	7.7	9.2	10	12	13	15	17	20	24	28	32
25	A	2.0	3.65	7.75	14.7	30.6	46.3	90.5	148	263	389	548	1010	1670	3510	6570	10560
	B	4.0	4.6	5.6	6.5	7.9	8.8	10	12	14	15	17	19	22	27	32	36
30	A	2.2	4.0	8.55	16.2	33.8	51.2	100	162	290	430	607	1120	1850	3900	7280	11710
	B	4.4	5.1	6.1	7.2	8.7	9.7	11	13	15	17	18	22	25	30	35	40
35	A	2.35	4.4	9.3	17.6	36.8	55.7	109	176	316	469	661	1220	2010	4250	7940	12780
	B	4.7	5.5	6.7	7.9	9.5	11	13	14	16	18	20	23	27	33	39	44
40	A	2.55	4.7	10.0	18.9	39.6	59.9	117	189	341	505	712	1320	2170	4580	8570	13780
	B	5.1	5.9	7.2	8.4	10	11	13	15	18	20	22	25	29	35	42	47
50	A	2.85	5.3	11.3	21.4	44.7	67.7	133	214	386	572	807	1490	2460	5190	9720	15650
	B	5.7	6.7	8.1	9.5	12	13	15	17	20	22	24	29	33	40	47	54
60	A	3.15	5.85	12.4	23.6	49.4	74.9	147	238	427	633	893	1650	2730	5760	10780	17360
	B	6.3	7.4	8.9	11	13	14	17	19	22	25	27	32	36	44	52	60
70	A	3.45	6.35	13.5	25.7	53.8	81.4	160	258	465	690	973	1800	2970	6280	11760	18950
	B	6.9	8.0	9.7	11	14	15	18	21	24	27	29	35	40	48	57	65
80	A	3.7	6.8	14.5	27.6	57.9	87.6	172	278	500	743	1050	1940	3200	6770	12690	20440
	B	7.4	8.6	10	12	15	17	20	22	26	29	32	37	43	52	62	70
100	A	4.15	7.7	16.4	31.1	65.4	99.0	194	314	566	840	1190	2200	3630	7680	14400	23200
	B	8.3	9.7	12	14	17	19	22	25	30	33	36	42	48	59	70	80
150	A	5.2	9.6	20.4	38.8	81.6	124	243	393	709	1050	1490	2760	4560	9650	18120	29220
	B	10	12	15	17	21	23	28	32	37	41	45	53	61	74	88	101
200	A	6.05	11.2	23.9	45.4	95.5	145	285	461	832	1240	1750	3240	5360	11350	21320	34400
	B	12	14	17	20	25	27	33	37	43	48	53	62	71	87	104	118
300	A	7.5	13.9	29.7	56.6	119	181	356	577	1040	1550	2160	4060	6730	14270	26830	43300
	B	15	18	21	25	31	34	41	46	54	60	66	78	90	110	131	149
400	A	8.75	16.2	34.7	66.2	140	212	417	676	1220	1820	2570	4780	7910	16790	31580	51000
	B	18	21	26	30	36	40	48	54	64	71	78	92	105	129	154	175
500	A	9.85	18.3	39.2	74.8	158	239	471	765	1380	2060	2910	5410	8970	19040	35840	57880
	B	20	23	29	33	41	45	54	62	72	80	88	104	119	147	174	199
600	A	10.9	20.2	43.2	82.5	174	264	521	846	1530	2280	3270	5990	9930	21100	39740	64210
	B	22	26	32	37	45	50	60	68	80	89	97	115	132	162	193	221
800	A	12.7	23.6	50.5	96.5	204	310	610	992	1790	2670	3780	7030	11670	24820	46750	75620
	B	25	30	37	43	52	59	70	80	94	104	114	135	155	191	228	260

^a For other temperature drops the pipe capacities may be changed correspondingly. For example, with a temperature drop of 30 deg. the capacities shown in this table are to be multiplied by 1.5.

alent number of elbows of the same pipe size which would have the same friction loss. An elbow is assumed to have the same friction loss as a straight pipe having a length equal to 25 diameters (nominal) of the elbow.

The resistance of various types of fittings expressed in equivalent elbow resistance is shown in Table 1.

The friction loss in pipes and tubing may be determined from Fig. 2 and Table 2 for black iron pipes, and from Fig. 3 and Table 3 for type L copper tubing. The scale at bottom of Figs. 2 and 3 is the heat carrying capacity in thousands of Btu per hour based on a 20 deg temperature difference between flow and return risers. In order to use the scale for other than 20 deg difference, refer to footnote under Figs. 2 and 3.

If the flow in a given pipe is calculated in *pounds per hour*, it may be

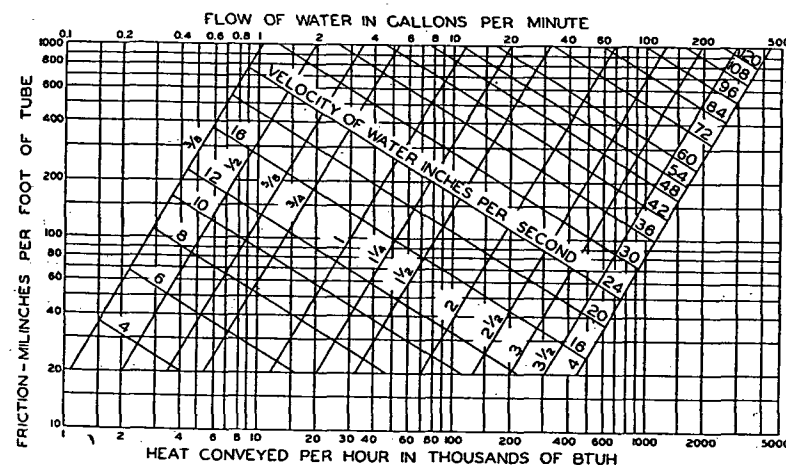


FIG. 3. FRICTION IN TYPE L COPPER TUBING

Lower scale of chart is based on 20 deg temperature difference between flow and return risers. To find friction when temperature drop is other than 20 deg, multiply the actual heat conveyed by $\frac{20}{\text{actual temp. drop}}$ and read the corresponding friction.

converted to corresponding *gallons per minute* by dividing the flow in pounds by 500, after which the friction may be found by entering Figs. 2 and 3 at the top scale reading which corresponds to the flow in gallons per minute as determined.

Orifices drilled in plates inserted in pipe unions are convenient means for introducing friction, where required to balance various circuits. The friction losses caused by various sizes of orifices are given in Table 4.

CLASSIFICATION OF SYSTEMS

Gravity or forced systems of piping may be classified according to piping arrangement and type of circulation as shown in Table 5. Flow and return main piping (gravity systems) for one-pipe, two-pipe direct return, and two-pipe reversed return systems are shown in Figs. 4, 5, and 6, re-