
0007-SWP-040501

N28008

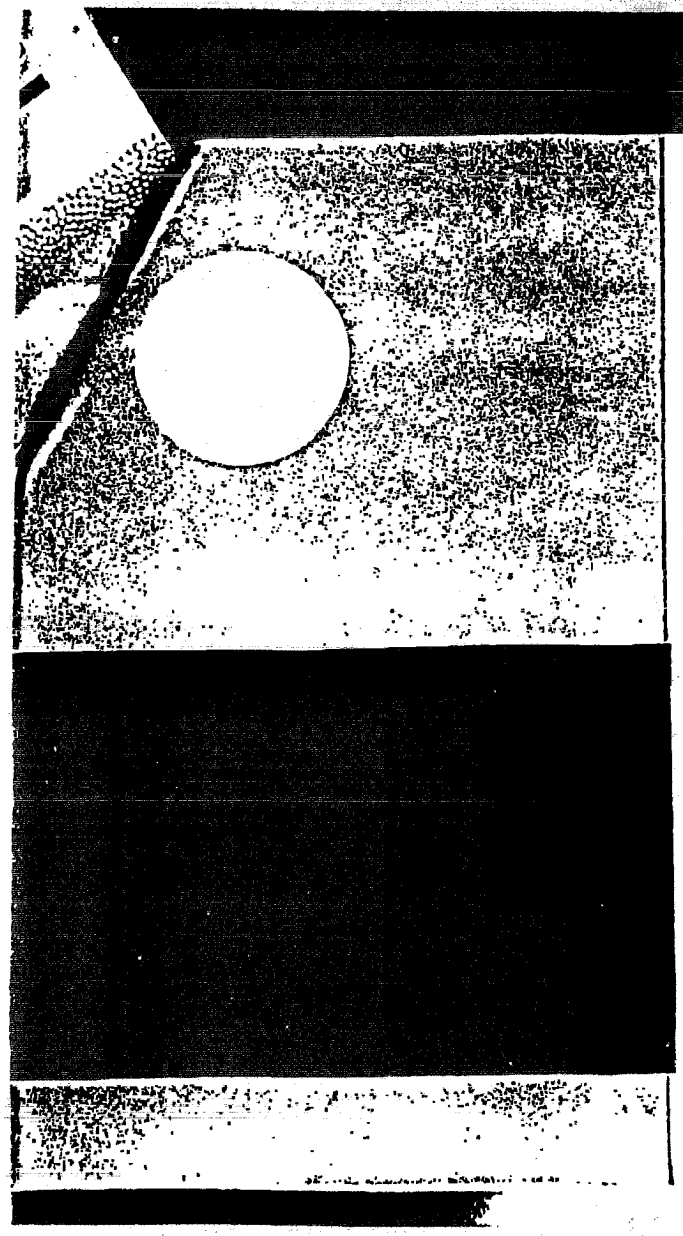

MONARCH PAINT

A colorful and lasting finish for all exterior painting of wood, brick, metal and cement:

DIRECTIONS AND PREPARATION OF SURFACE

Do not paint in damp, foggy or extremely cold weather. Most finishes or coatings dry best at 65°F. or higher.

MIX THOROUGHLY—Use a flat paddle or electric paint mixer Remove all dirt and loose or peeling paint. Shellac knots and sap streaks. Putty nail holes and cracks after Undercoat has been applied.

REPAINT WORK: On a previously painted surface in good condition one coat of Monarch Paint applied full body will generally suffice.

NEW WORK OR SURFACES IN BAD CONDITION: First prime with Monarch No. 350 Undercoat. Allow for thorough dry (as much as three days may be necessary) and then apply a final coat of Monarch Paint.

If this product becomes too heavy for easy brushing, add a small quantity of Solve-X or Turpentine. Do not use linseed oil.


CAUTION! COMBUSTIBLE
Keep Away From Heat and Open Flame
Contains Lead or Other Compounds. Harmful If Eaten.
Do not apply on toys, furniture or interior surfaces which might be chewed by children. Use with adequate ventilation. Avoid breathing vapor, spray mist, or dust if sanded. Avoid prolonged or repeated contact with skin. Wash thoroughly after handling and before eating or smoking. Close can after using. H-855

MONARCH—843—PURE GRAY

Pigment	52%	Vehicle	48%
Titanium Magnesium Pigment	17%	Non-Volatile (Linseed Oil)	40%
Titanium Dioxide	5%	(Heat Bodied Linseed Oil)	28%
Zinc Oxide	32%	Volatile (Mineral Spirits & Driers)	32%
White Lead-Basic-Sulfate	14%		100%
8180	100%		

Tinted with pure colors

THE MARTIN-SENOUR CO.
ADMINISTRATIVE OFFICES, CHICAGO, ILLINOIS
BRANCHES AND DISTRIBUTORS IN ALL PRINCIPAL CITIES
Light Tints—3310 Made in U. S. A.

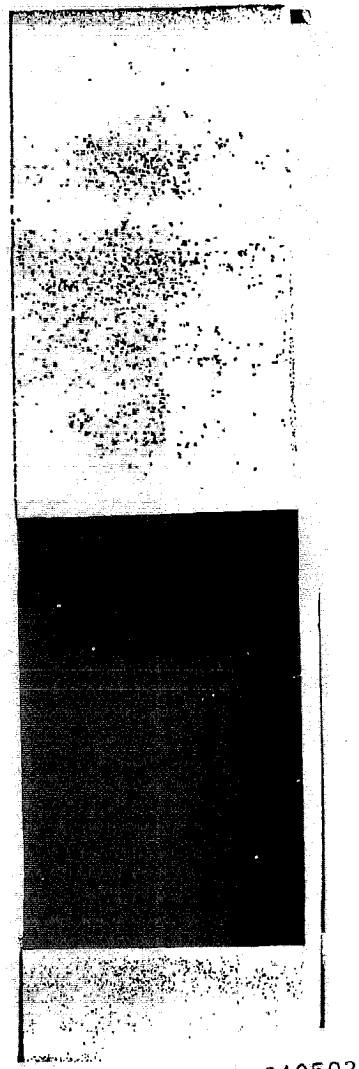

0007-SWP-040502

0007-SWP-000123892