D 1971

PLAINTIFF'S EXHIBIT

GP-838

GP

GYPSUM WALLBOARD

FOR WALL AND CEILING SYSTEMS

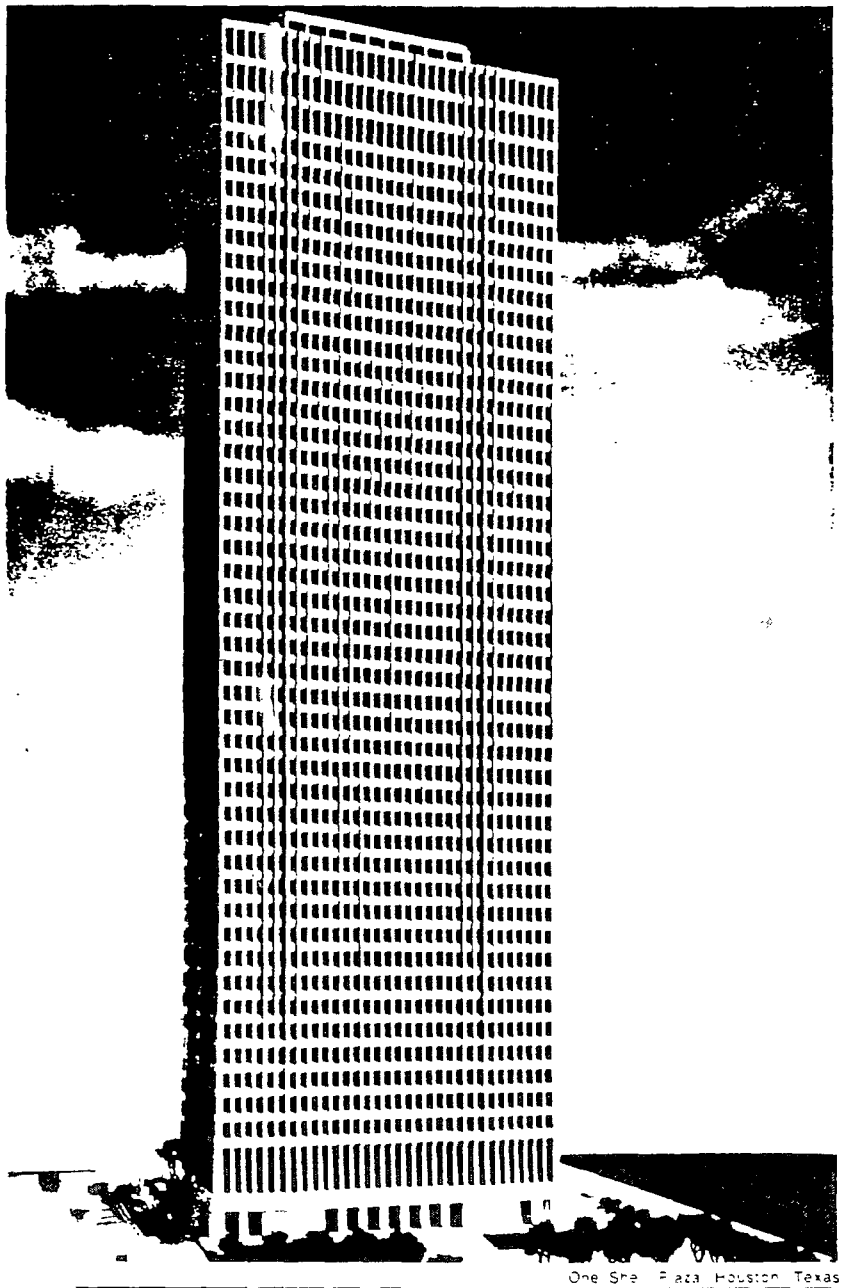

- Wallboard Products
- Joint System and Accessory Products
- 1/4" Incombustible Gypsum Sound Deadening Board
- Eternawall™ Vinyl Surfaced Gypsum Wallboard
- Tile Backer Board
- Round Edge Gypsumboard
- Steel Stud Details
- Technical Data
- Construction Systems
- Ceiling and Floor Assemblies



One Shell Plaza Houston Texas

Georgia-Pacific Corporation

January, 1971

9 FINISHES

SGP 0002600



G-P/Bestwall — Triple Duty Joint Compound

G-P/Bestwall Triple Duty Wallboard Joint Compound is a vinyl multi-purpose joint system product. A single bag offers taping, topping and texturing. It can be used for all coats in the reinforcing and concealing of joints in gypsum wallboard construction. The binder in Triple Duty, being a vinyl, gives this product a wet life of 30 to 60 days duration. This allows pre-mixing in large quantities prior to application. Triple Duty can be applied using standard hand or mechanical tools. There is low shrinkage and it is easily sanded. When the application is completed, the surface is ready for priming and decoration as desired with no further preparation necessary. **Coverage:** 60 lbs. per 1,000 sq. ft. (12-50 lbs. per 1,000 sq. ft. when used as a texturing material.)

Lb. Package — 25 and 50



G-P/Bestwall — Bedding, Topping Compound

G-P/Bestwall Joint System products are designed to conceal joints and nail heads and "surface-weld" wallboard panels together. Properly used, these products assure smooth, seamless appearance of walls and ceilings, with joints as strong as the wallboard itself.
Bedding Compound — Designed to provide maximum adhesion of tape to the joints and for initial application to nail heads and corner bead. It spreads smoothly and may be hand or machine applied. **Coverage:** 15 lbs. per 1,000 sq. ft. (Used in conjunction with 45 lbs. of Bestwall Topping Compound.)
Topping Compound — Used for finishing taped joints and nail heads. **Sanding is unnecessary** if carefully applied. It is long working with low shrinkage. **Coverage:** 45 lbs. per 1,000 sq. ft. (Over 15 lbs. of Bestwall Bedding Compound.)

Lb. Package — 25



G-P/Bestwall — Ready Mix Joint Compound

Ready Mix Joint Compound is an easy-working material for the filling of joints, and embedding the joint reinforcing tape in gypsum wallboard construction. Furnished in cans and cartons ready to use, this stable, all-purpose compound is also excellent for use in covering nail heads and forming interior and exterior angles. Ready Mix Joint Compound assures a standard mixture for uniform workability throughout the job. It has a long wet life and will not spoil even when the container is left opened. Ready Mix Joint Compound produces an excellent surface for any type of decoration. For best results, the surface should be primed before being decorated. Coverage: 5 gal. per 1000 sq. ft.

Package — 1 and 5 gal. cans, 4 gal. cartons

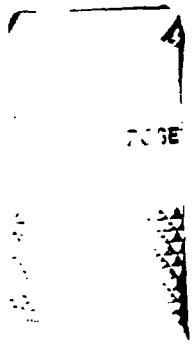

G-P/Bestwall — All Purpose Joint Compound

G-P/Bestwall All Purpose Joint Compound is used for bedding tape, topping, corner bead, nail spotting and texturing. When taping be sure the compound under the tape, and the first coat over the tape is thoroughly dry before applying the next coat over the joints. When used for texturing, for best results, apply a vinyl primer to the entire area before texturing. The texture may be applied with a roller, sponge, brush or other suitable implement depending on the type of configuration desired. **Coverage:** 60 lbs. per 1,000 sq. ft.

Lb. Package — 25; 18 lbs. with 250′ tape



G-P/Bestwall—Speed Set

G-P/Bestwall Speed Set Joint Compound makes possible the taping and finishing of all wallboard joints within a single day. It can be used for all coats. Speed Set is a setting rather than a drying type of compound, and will not shrink. Comes in two ways—"1 Hour Working Time" and "2 Hour Working Time". For best results, use a primer sealer over surface before painting or texturing.

Lb. Package—25



Lb. Package—50

G-P/Bestwall—Texturing Materials

G-P/Bestwall Bestex A, B, C and D are texture materials designed to produce various texture finishes over drywall construction.
Bestex A—contains no aggregate and can be used for both hand and spray application to produce textures such as stipple swirl, spatter and orange peel finishes.
Bestex B—contains a small amount of aggregate and produces medium coarse textures such as sand finishes.
Bestex C—contains a large amount of aggregate and is used for coarse textures such as simulated acoustic finishes.
Bestex D—a texture with coarse aggregate for simulated acoustic ceilings.
B, C and D textures are for spray application only. All three textures produce hard surfaced, white, decorative finishes that have excellent light reflective qualities and hiding power. If desired, Bestex textures can be painted with latex or vinyl paint. **Coverage:** Bestex A, 12-50 lbs. per 1,000 sq. ft. depending upon texture. Bestex B, C and D finishes approx. 300 to 500 sq. ft.

Lb. Package—Bestex A 25 lb., Bestex B, C, D, 40 lb.

SPECIFICATIONS FOR WALLBOARD JOINT TREATMENT

Scope

All wall and ceiling surfaces are included. Furnish all labor and material necessary to reinforce and conceal all joints between G-P Gypsum wallboard panels and cover nail or screw heads in accordance with specifications and drawings.

General Provisions

In cold weather, the building shall be adequately heated to maintain a temperature in the range of 55 to 70°F. Adequate ventilation shall be provided during and after application of joint treatment. When required, heat shall be furnished by designated contractor.

Materials

All materials specified shall be manufactured by the Georgia-Pacific Corporation, and used in strict accordance with the manufacturer's directions.

Joint Compound

Two-Bag System—Apply G-P Bedding for the initial coat and G-P Topping for all succeeding coats and for spotting nail or screw heads.

One Bag System—Apply G-P Triple Duty, Ready Mix, All Purpose or Speed-Set Joint Compound. Each material may be used independently for all steps in the treatment of drywall joints, spotting nail and screw heads and corner bead application.

Jointwork

Apply G-P embedding type joint compound fully and evenly into the valley formed by adjoining edges of the gypsumboard. Center G-P Wallboard Tape and press into compound with sufficient pressure to squeeze some compound from edges of tape, yet leaving enough for a sufficient bond. Apply a fill coat extending a few inches beyond edges of tape and feather edges of compound. When dry, apply G-P finishing type joint compound and feather the edges about 1½" beyond the first coat. (When Speed-Set is used, the taped joint can be covered as soon as the initial coat is set and before it is dry.) When dry, sand lightly and touch up any imperfections. Wipe off dust in preparation for final decoration.

A prime coat shall be used over the entire wallboard surface before final decoration is applied.

SGP 0002602

DISTRIBUTION CENTERS

ALABAMA
- Birmingham
- Mobile
- Montgomery

ALASKA
- Anchorage
- Fairbanks

ARIZONA
- Phoenix

ARKANSAS
- Little Rock

CALIFORNIA
- Anaheim
- Berkeley
- Fresno
- Los Angeles
- Riverside
- Sacramento
- Salinas
- San Diego
- San Fernando
- San Jose

COLORADO
- Denver

CONNECTICUT
- Wallingford

FLORIDA
- Jacksonville
- Miami
- Orlando
- Tallahassee
- Tampa
- West Palm Beach

GEORGIA
- Albany
- Atlanta
- Augusta
- Savannah

IDAHO
- Boise

ILLINOIS
- Chicago South
- Chicago North
- Peoria

INDIANA
- Elkhart
- Evansville
- Indianapolis

IOWA
- Des Moines

KANSAS
- Wichita

KENTUCKY
- Louisville

LOUISIANA
- Lafayette
- New Orleans
- Shreveport

MAINE
- Portland

MARYLAND
- Baltimore
- Easton

MASSACHUSETTS
- Boston

MICHIGAN
- Grand Rapids
- Detroit

MINNESOTA
- Minneapolis

MISSISSIPPI
- Jackson

MISSOURI
- St. Louis
- Kansas City

MONTANA
- Billings
- Great Falls

NEBRASKA
- Lincoln

NEW HAMPSHIRE
- Manchester

NEW JERSEY
- Clifton

NEW MEXICO
- Albuquerque

NEW YORK
- Albany
- Buffalo
- Rochester
- Long Island
- Syracuse
- Yonkers

NORTH CAROLINA
- Charlotte
- Greensboro
- Raleigh

OHIO
- Akron
- Cincinnati
- Cleveland
- Columbus
- Dayton
- Toledo

OKLAHOMA
- Oklahoma City
- Tulsa

OREGON
- Eugene
- Portland

PENNSYLVANIA
- Lancaster
- Pittsburgh
- Philadelphia
- St. Clair

RHODE ISLAND
- Providence

SOUTH CAROLINA
- Columbia
- Greenville

TENNESSEE
- Bristol
- Chattanooga
- Knoxville
- Memphis
- Nashville

TEXAS
- Dallas
- El Paso
- Fort Worth
- Houston
- Lubbock
- San Antonio

UTAH
- Salt Lake City

VIRGINIA
- Lynchburg
- Norfolk
- Richmond

WASHINGTON
- Bellingham
- Seattle
- Spokane
- Tacoma

WASHINGTON, D.C.

WISCONSIN
- Milwaukee

GYPSUM SALES OFFICES

CALIFORNIA
- Los Angeles
- San Jose

DELAWARE
- Wilmington

GEORGIA
- Atlanta

ILLINOIS
- Chicago

MICHIGAN
- Detroit

TEXAS
- Dallas

WASHINGTON
- Seattle

WASHINGTON, D.C.

We Support
These Associations

AMERICAN PLYWOOD ASSOCIATION

GYPSUM ASSOCIATION

MEMBER NHCC NAHB NATIONAL HOUSING CENTER COUNCIL

NKCA

npa

PRODUCERS' COUNCIL