





ILG Electric Ventilating Co.

2880 North Crawford Ave., Chicago 41, Ill.


Offices in more than 40 Principal Cities

Horizontal Type Unit Heaters—have ILG-built Self-Cooled Motor which counteracts coil heat—never “slow roasts.” Graduated, 2-piece, cast iron header gives “balanced” steam distribution. Brass orifice bushings expand tubes uniformly in header plate. Copper fins are pressed into round copper tubes for permanent union—no brazing, soldering, or welding. Bottom header “floats” to permit expansion and contraction of coil independent of casing. Tested and Rated according to codes of I.U.H.A. and A.S.H. V.E. Ratings certified by I.U.H.A.—“One-Name-Plate” Guarantee. Wide range of sizes and capacities.




Low-Ceiling Type

For vertical mounting in buildings where headroom is at a premium. Side inlets and outlets at top and bottom assure extremely compact installation.



Vertical Type

Recommended for installations with extremely high or extremely low ceilings. Air diffusers or deflectors available to direct flow of heater air.



Textile Type

More tubes, no fins—for textile mills and applications where lint or other material normally adheres to fin surfaces and clogs up coil.

ILG Electric Unit Heaters


STANDARD TYPE



For instant, clean, safe, dependable heating. Coil is of black heat type which operates below 400 degrees. Protected against excessive temperature rise by patented automatic thermal cut-out and magnetic starter. Sizes 5 to 15 KW.

TYPE “HT”

For installations requiring a small volume of heat. Exceptionally efficient. Suitable for constant duty. Non-overheating black heat type coil with individually interchangeable elements. Sizes 1½ to 4 KW.



For ILG Propeller and Centrifugal Fans, see page 1227

Jaden Manufacturing Co.

HEATING & AIR CONDITIONING EQUIPMENT

HASTINGS

NEBRASKA

SINCE 1914


ALL YEAR AIR CONDITIONING EQUIPMENT

“Water is the Refrigerant”

Designed especially for cooling with natural cold water sources, also ideal for chilled water operation. Heating with either hot water or steam. Finned copper tube cooling and heating coils, cushion-mounted centrifugal blowers, “Fiberglas” replaceable filters. Sturdy steel cabinets, beautiful hammertone finish.


SUSPENSION MODELS

Sizes up to 6 tons cooling, 2200 cfm air delivery, 188,000 Btu per hour heating with hot water. For suspension from ceiling or placement on shelf or platform—with or without ductwork. Matching steam coil packages available with heating capacities up to 127,000 Btu per hour.

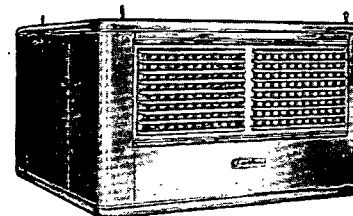

FLOOR MODELS

Sizes up to 3 tons cooling, 1100 cfm air delivery, 94,000 Btu per hour heating with hot water. Smart appearance blends with other furniture in residences, offices, hotel rooms, etc.



CONVERSION CONDITIONERS

Sizes up to 6 tons cooling, 2200 cfm air delivery. For converting any warm air heating plant into a year-around comfort system.

- Central Plant Air Conditioners
- Suspension Model Air Conditioners
- Floor Model Air Conditioners
- Conversion Conditioners
- Blowers
- Coils
- Coil Packages

