


FUSIBLE SERVICE EQUIPMENT




Parallel Connected Main and Branch Circuits

WHEN ORDERING SPECIFY

- Catalog number

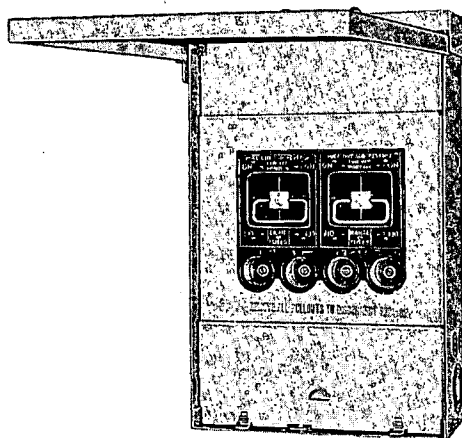

4335H204RT

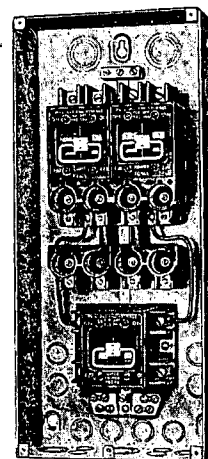

4335H308

SINGLE PHASE—3 Wire Solid Neutral—120/240 Volts A-c—Grounded Neutral—Main (lighting) pullout controls plug fuse circuits and sub-feed taps.

Main Lug Amps.	Lighting Pullout ②	Branch Circuits		General Purpose Panel				① Raintight Panel		
				Catalog Number		Price	Ship. Wt. Lbs.	Catalog Number	Price	Ship. Wt. Lbs.
		② 2 Pole Pullout	Plug Fuse	Surface Mounted	Flush Mounted					
100 AMPERE SERVICE—2 TO 5 PULLOUTS										
100	1—60A.	1—60A.	4	4335- H204-S	4335- H204-F	\$16.	10	4335- H204RT	\$26.	13
			6	H206-S	H206-F	28.	12	H206RT	38.	17
			8	H208-S	H208-F	32.	13	H208RT	42.	18
			10	H210-S	H210-F	39.	17	H210RT	49.	20
			12	H212-S	H212-F	43.	18	H212RT	53.	21
100	1—60A.	2—60A.	4	H304-S	H304-F	31.	16	---	---	---
			6	H306-S	H306-F	36.	17	---	---	---
			8	H308-S	H308-F	40.	18	---	---	---
100	1—60A.	1—60A. and 1—30A.	4	H1304-S	H1304-F	31.	16	---	---	---
			6	H1306-S	H1306-F	36.	17	---	---	---
			8	H1308-S	H1308-F	40.	18	---	---	---
100	1—60A.	2—60A. & 1—30A.	8	H1408-S	H1408-F	48.	18	---	---	---
			12	H1412-S	H1412-F	58.	34	---	---	---
100	1—60A.	1—60A. and 2—30A.	4	H2404-S	H2404-F	39.	16	---	---	---
			6	H2406-S	H2406-F	43.	18	---	---	---
			8	H2408-S	H2408-F	48.	19	---	---	---
			10	H2410-S	H2410-F	54.	23	---	---	---
			12	H2412-S	H2412-F	58.	34	---	---	---
100	1—60A.	1—60A. & 3—30A.	8	H3508-S	H3508-F	58.	24	---	---	---
			10	H3510-S	H3510-F	62.	24	---	---	---
FOR "OFF PEAK" WATER HEATER SERVICE										
100	1—60A.	1—60A. & 2—30A.	8	4335- H8408-S	4335- H8408-F	\$48.	24	---	---	---
EXPANDABLE PARALLEL TYPE										
Furnished with 1 Pullout and Provisions for Adding 1 or 2 Pullout Assemblies.										
100	1—60A.	Provision for 1 or 2	8	4332- H308-S	4332- H308-F	\$29.	21	---	---	---
			10	H310-S	H310-F	33.	24	---	---	---
			12	H312-S	H312-F	37.	25	---	---	---
Add On ② Pullout Assemblies		Amperes		Catalog Number		Price		Ship. Wt. Lbs.		Carton
		30 60		4332- H30 H60		\$6. 6.		1½ 1½		10 10

① Raintight panels have opening in top covered by a blank plate. Interchangeable hubs may be selected from table, page 30.

② Pullouts also HP rated. 30 ampere unit, 1½ HP standard, 3 HP maximum. 60 ampere unit, 3 HP standard, 10 HP maximum.

CUTLER-HAMMER

DISCOUNT SCHEDULE 17 CD-2