
JOINT SYSTEM,
ADHESIVES, TEXTURES

GEORGIA-PACIFIC

Drywall Adhesive

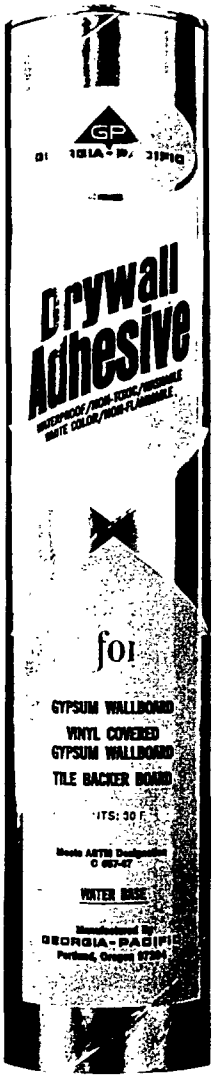

Georgia-Pacific Drywall Adhesive is a white, water based latex emulsion product that is non-toxic and non-flammable. The tubes are used with standard hand caulking guns, or, if in bulk, it may be pumped. The use of Drywall Adhesive to apply gypsum wallboard to wood or metal framing is growing at a rapid rate. The reason for this growth is that the drywall adhesive solves many job site problems. The adhesive applies easily and quickly. It provides a gap-filling bridge between the gypsumboard and twisted framing. It is easily compressed at protruding framing members. This helps obtain a flat surface for your joint finishing and decoration. On walls, it eliminates most field fasteners and thereby minimizes many of the common problems, such as nail-pops, commonly associated with field fasteners. On metal studs it reduces rattles and substantially increases the rigidity. When cured, the adhesive is tough, flexible, water resistant and remains stable under temperature extremes. It adds strength, resilience and sound reduction properties. G-P Drywall Adhesive meets ASTM Specification C-557-67.

USES

For installing various types of gypsum wallboard such as Regular wallboard, Firestop wallboard, Vinyl Surfaced wallboard, Tile Backer Board, Insulating wallboard to wood or metal framing members on both wall and ceilings. It may also be used to apply wallboard to wallboard, and wallboard to polystyrene or urethane foam insulation, poured concrete, concrete block and wood fiber boards. It's ideally suited for applying gypsumboard to existing walls.

PRODUCT DATA

Sizes: 30 oz. tube (12 per case, weight—3 lbs. each).
Five gal. pail (weight 58 lbs.).
Coverage: One gallon will apply approximately 600-700 sq. ft. of gypsum wallboard.
Cleaning: Use soap and clean water for cleaning before adhesive dries. After it has set, use acetone. Once adhesive has set, it is not resoluble in water.

TECHNICAL DATA

Base ....Vinyl Polymer	Color ....White	Solids Cont. ...70% ± 1% by wt.	
Type ....Water System	Consistency .....Med. Paste	Weight Per Gallon .....11.6 lbs.	

APPLICATION

Apply a ⅜" bead to clean framing members with caulking gun. Where two boards butt on framing, apply a zig-zag bead so adhesive will contact both boards. Do not apply adhesive more than 30 minutes before board installation. **On walls**—Horizontal installation, place wallboard on framing and press firmly into place to assure contact. Use fasteners 16" o.c. around perimeter. No fasteners are required in field, but temporary fasteners may be desirable. **Ceilings**—Same as walls except when board applied parallel to joists, use fasteners 24" o.c. in the field. If applied across joists, use one field fastener in center of board at each joist. **Existing walls**—Apply ⅜" bead 8" o.c. to sound, firm existing wall. Press board firmly into place. Nail 16" o.c. at top and bottom.

PRECAUTIONS

1. Do not apply adhesive more than 30 minutes before installing board.
2. PROTECT FROM FREEZING. Adhesive is not destroyed by freezing, but should be brought back to 70° before using. For best results, keep at 70° F. for 24 hours before using.

NOTICE TO PURCHASERS

The manufacturer and distributor of this product disclaim all warranties which extend beyond the description on this label. In the event of a defect in this product, the liability of the manufacturer or the distributor or both is limited to (1) delivering to the purchaser a replacement tube of Drywall Adhesive or (2) refunding the purchase price.

SGP 0026746

DA—8—1/71—

GEORGIA-PACIFIC / GYPSUM DIVISION
GEORGIA-PACIFIC BUILDING PORTLAND, OREGON 97204

PRE-DECORATED
WALLBOARD

SGP 0026746.01