SHELL INSULATION (cont'd.)

4B2.6 If the shell insulation does not interfer with the removal of the bolts from flanged joints it shall be butted to the flanges. (See figure 17A) If the flange bolts can not be removed with out damaging the shell insulation bolt removal space shall be allowed. (See figure 17B)


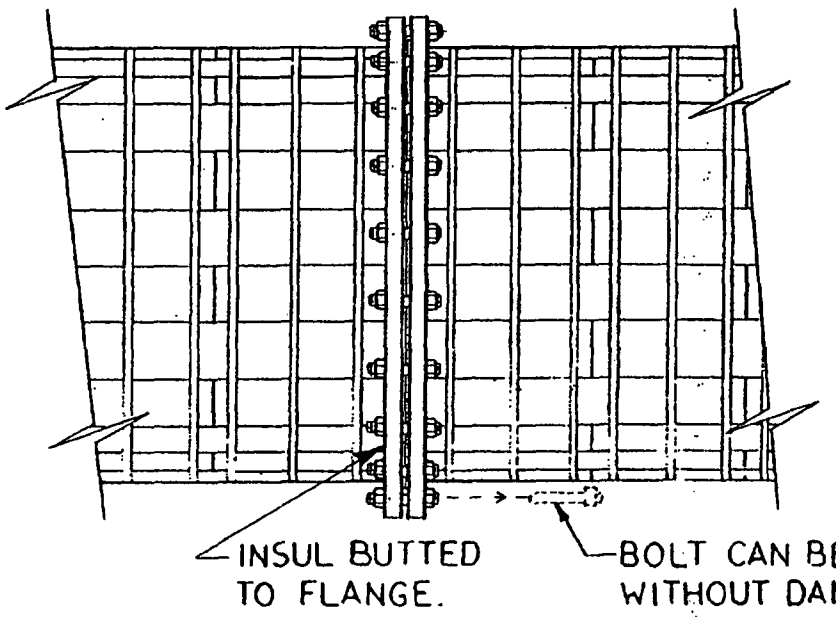


FIGURE 17A

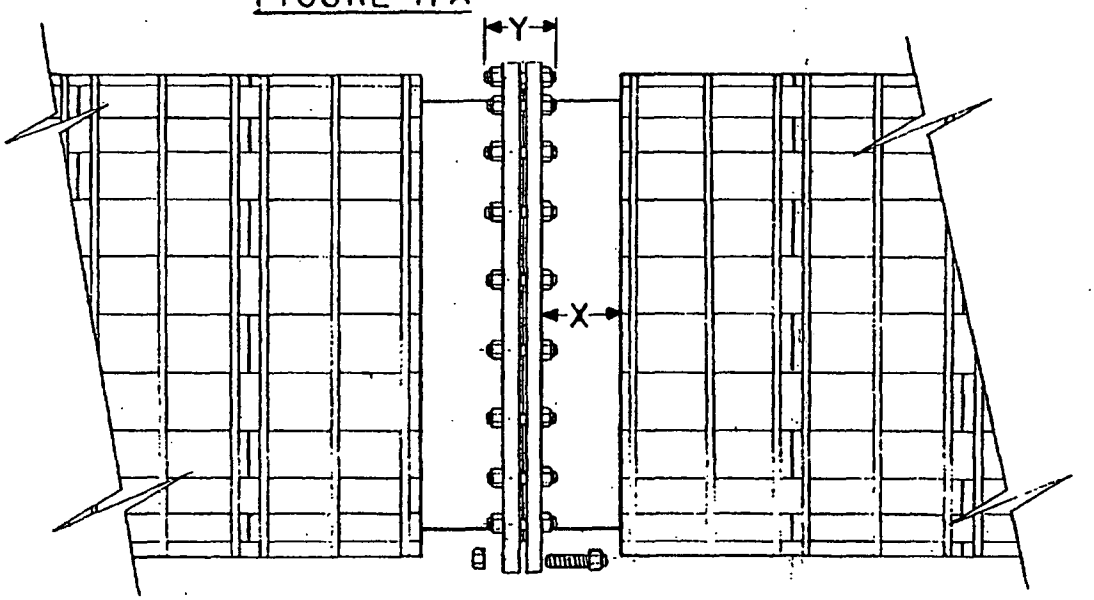

X = Y + 1"

FIGURE 17B