
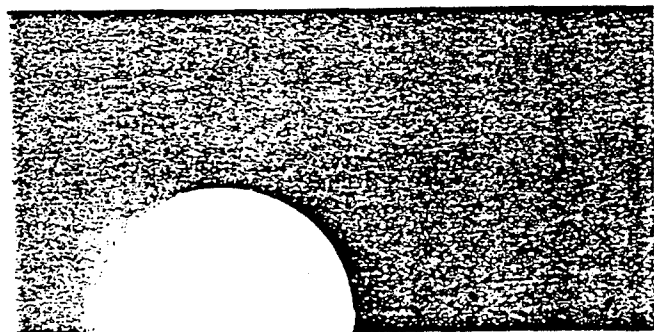


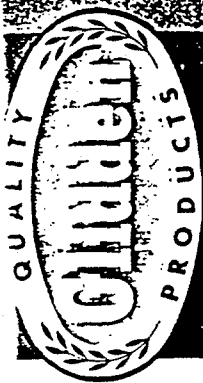

20-62

CAUTION! COMBUSTIBLE

Keep from heat and open flame. Avoid breathing vapor or spray mist and prolonged contact with skin may cause skin irritation. Do not take internally — may contain compounds harmful if eaten. Keep container closed when not in use. Keep Out of the Reach of Children. Use with Adequate Ventilation.

(1-361)

Made in U.S.A.

1271 GREENBRIAR

alkyd gloss enamel

JAPANESE

INTERIOR — EXTERIOR

CLD33332

N 4078

JAPALAC

A leading Enamel since 1898! This alkyd gloss enamel, formulated without lead pigments, may be applied by brush, roller or spray and produces an amazingly tough durable finish for either interior or exterior use. It is recommended for use on furniture, kitchen and bathroom walls, woodwork, porch and lawn furniture, wrought iron, bicycles and implements. It covers most previously painted surfaces in one coat providing the color difference is not too great.

DIRECTIONS

SURFACE PREPARATION: All surfaces must be dry and free from dirt, grease, rust, cracked paint and other foreign matter. All rough edges should be smoothed by sanding. Glossy surfaces should be treated with Glidden Surfacing to improve adhesion. Repair cracks in plaster and wood with Glidden Spred Patch.

PAINTED SURFACES: Prepare the surface and apply the enamel unthinned. Over a porous surface a second coat may be necessary. Allow an overnight drying between coats.

UNPAINTED SURFACES: Seal the surface by applying a coat of Glidden Speed-Wall Alkyd Interior Base Coat (for new plastered walls) or Gliddencoat White Enamel Undercoat (woodwork) tinted with Colors-In-Oil or Dramatone Multi-Pur-

pose Tinting Colors to the approximate shade of the finish coat. Allow to dry overnight.

MATERIAL PREPARATION: Stir enamel thoroughly before using. If thinning is necessary for brush application, thin sparingly with turpentine or mineral spirits. For spraying thin 20% with naphtha.

APPLICATION: Apply a full generous coat. Brush from the unpainted area into the freshly painted area. For spray application apply a mist coat followed by a full wet coat.

GENERAL: The enamel dries to a high gloss in 4 to 6 hours and may be recoated after drying overnight. If a second coat is applied within one week, no surface preparation should be required between coats, otherwise sand lightly between coats. Covers approximately 500 square feet per gallon. L.C. 0682

Pigment	10.0%
Vehicle	89.9%
Pigments	100.0%
Titanium Dioxide	10.0%
Yellow	22.0
Red	10.0
Phthalic	5.0
Calcium Carbonate	89.7
Vehicle	100.0%
Alkyd	41.0%
Mineral	58.9
Others	100.0%
F-1271	990

ONE GALLON
U. S. MEASURE

GLD33333

THE GLIDDEN COMPANY • CLEVELAND 14, OHIO