


Illinois Testing Laboratories, Inc.

Room 516, 420 N. La Salle St., Chicago 10, Ill.

Alnor

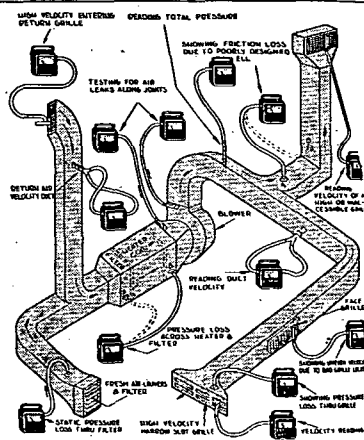
Precision Instruments for Every Industry

The direct-reading ALNOR
VELOMETER

TYPE 4-F Standard minimum set for heating and air conditioning air velocity measurements.

The Alnor Velometer is an instantaneous, direct-reading air velocity meter designed for convenient, rapid determination of air velocities in air conditioning, heating and ventilating, and exhaust systems. It gives instantaneous direct readings in feet per minute, without timing, calculations, or reference to tables or charts. Accurate information on performance of equipment, duct systems, etc., can be obtained with a few moments inspection with the VELOMETER. It can be effectively used to locate drafts and leaks around windows and doors, or in duct systems.

The Alnor Velometer is built in several standard ranges from 20 fpm to 6000 fpm, and up to 3 in. static or total pressure. Special ranges available as low as 10 fpm and up to 25,000 fpm velocity and 20 in. pressure.



Alnor Velometer, Jr. A miniature, direct reading Velometer—4 in. high, 3 in. wide, 1-1/2 in. deep. Weight, 8 oz. Accurate, strong. Available in single and double scale ranges: 0-200 to 0-2500 fpm. Bulletin 725.



Alnor Thermo-Anemometer. For accurate measurement of low air velocity. Compact, direct-reading, battery operated, self-contained, portable. Scale 6 in. Meter ranges: 0-600 fpm and double range 0-300/100-2000 fpm. Accurate readings as low as 5 fpm. Temporary Bulletin 913-A.

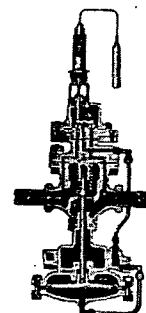


Leslie Co.

266 Grant Avenue

Lyndhurst, New Jersey

REGULATORS and CONTROLLERS for
the Regulation and Control of Pressure,
Temperature, Flow and Liquid Level.

TRADE
LESLIE
MARK
ESTABLISHED 1900

Temperature Regulator
Class TPump Governor
Class PRFloatless Level Control for
Boilers, Tanks, Evaporators,
Heaters, Standpipes, etc.

LESLIE COAST-TO-COAST SERVICE
In all principal industrial centers LESLIE factory-trained engineers are available to help with any control problem involving steam, liquid, air or gas. Look for LESLIE REGULATORS under "Valves" or "Regulators" in your classified telephone directory.

INTERCHANGEABILITY—All internal parts of LESLIE Regulators are dimensionally interchangeable and have maximum interchangeability in all sizes and classes.

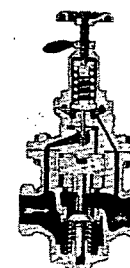


LESLIE EXCLUSIVE FEATURES—at no extra cost!

- Stellited Seat Rings
 - Hardened Stainless Steel Main Valves, 500 Brinell
 - Corrosion Resistant Springs
 - Hardened Stainless Steel Cylinder Liners, 500 Brinell.
- Supplied as standard equipment.

LESLIE PRESSURE REDUCING VALVES, PUMP GOVERNORS, and TEMPERATURE REGULATORS

Self-contained, spring loaded, internal pilot piston or diaphragm operated with stellited seat rings, hardened stainless steel trim, bronze, iron, or steel construction. All LESLIE Regulators feature:

- Accuracy of regulation comparable to instrument control
- Single-seated construction for positive dead-end shutoff
- Quick valve action for sudden load changes
- Maximum resistance to corrosion and wear
- Maximum spring range—from minimum to maximum controlled pressure range without change of spring or diaphragm

Reducing Valve
Class L-3Self-Cleaning
StrainerControl Pilot
Type PDDiaphragm Control
Valve
Class D-1