


NYLON AND SISAL ROPE ... STARTER CORDS ... ROPE HOOKS

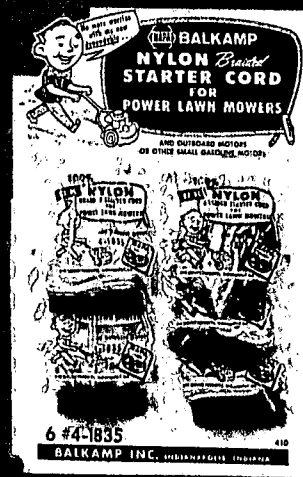

A. NYLON ROPE

100% Nylon braided rope. Not affected by oil, gasoline, alkalis, fresh or salt water.

DISPLAY MERCHANDISER No. 14-4234

Contains the four sizes indicated and free wire display rack.

No.	Description	Dia.	Size	Tensile Strength
4-4235†	600 Ft. Spool	1/8"	#4	460 lbs.
4-4233	500 Ft. Spool	3/32"	#5	625 lbs.
4-4236†	475 Ft. Spool	3/16"	#6	700 lbs.
4-4237†	200 Ft. Spool	1/4"	#8	1100 lbs.
4-4238†	175 Ft. Spool	5/16"	#10	2000 lbs.
4-4239	80 Ft. Spool	1/2"	#16	4000 lbs.

Indicates Included in Display

4-4233 Spool	Price \$26.30
14-4234 Display	Price \$92.46
4-4235 Spool	Price \$25.28
4-4236 Spool	Price \$30.00
4-4237 Spool	Price \$16.88
4-4238 Spool	Price \$20.30
4-4239 Spool	Price \$21.10

B. ROPE HOOK

Steel, bolt on type rope hook swings away automatically when not in use. Ideal for pick up trucks, trailers, boats and other home and industrial uses.


4-1836 Price \$1.05

C. STARTER CORD

Braided Nylon

A high quality nylon cord with red wooden handle. Use on power lawn mowers, outboard motors and other small gasoline engines. 46 in. long, 5/32 in. dia. Packaged in individual plastic bags with 6 cords attached to a colorful display board.

4-1835 50¢

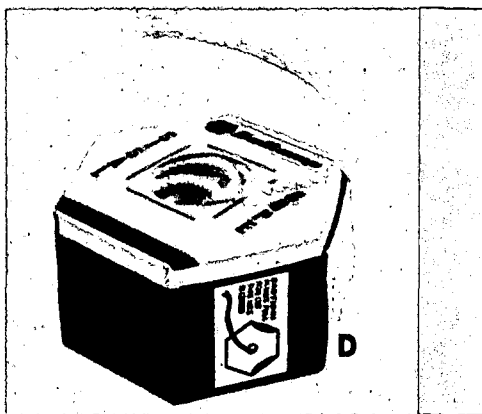

D. SISAL ROPE

Fabricated from the best grades of Sisalana fibre. Water resistant and lubricated to reduce wear between strands. Free from harsh fibres. 20-Lb. coils in colorful hexagonal packages, so compact they can be easily moved and set up in any convenient spot—on counters, floor or shelves. Rope is drawn-out through hole in center. No tangles, muss or waste. Coils remain securely held and protected until last foot is sold.


Part No.	Description	Dia.	Working Load	Tensile Strength
14-6502	1,000 Ft. Roll	1/4"	96 Lbs.	480 Lbs.
14-6501	500 Ft. Roll	3/8"	216 Lbs.	1080 Lbs.
14-6500	260 Ft. Roll	1/2"	424 Lbs.	2120 Lbs.

14-6500 Per Roll	Price \$25.44
14-6501 Per Roll	Price \$24.96
14-6502 Per Roll	Price \$21.28

E. DRIPLESS-STRIPLESS CRANKCASE PLUG

Eliminates oil leaks caused by stripped or damaged metal crankcase openings. Fully tested at temperatures of 70° below and 260° above 0. Oils, acids, sludge, water or gasoline commonly found in engines have no adverse effect upon it. Cannot be over-tightened or left loose. Provides a perfect seal for half-inch, over size, double over-size and triple-over-size, crankcase openings.

4-4295 Price \$1.98

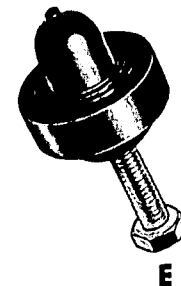

See page 112 and 113 for additional Plug Application