

WHITE
1851

Glidden

Endurance Mildew & Fume Resistant


A PRIMER FOR EXTERIOR WOOD SURFACES

CAUTION! COMBUSTIBLE
Keep away from heat and open flames. Avoid prolonged contact with skin and breathing of vapor or spray mist. Do not use in enclosed spaces. Close container after each use. Use With Adequate Ventilation.

KEEP OUT OF THE REACH OF CHILDREN

Made in U.S.A.

Glidden Paint Company
New York, N.Y.
Glidden Paint Company
New York, N.Y.
Glidden Paint Company
New York, N.Y.
Glidden Paint Company
New York, N.Y.
Glidden Paint Company
New York, N.Y.

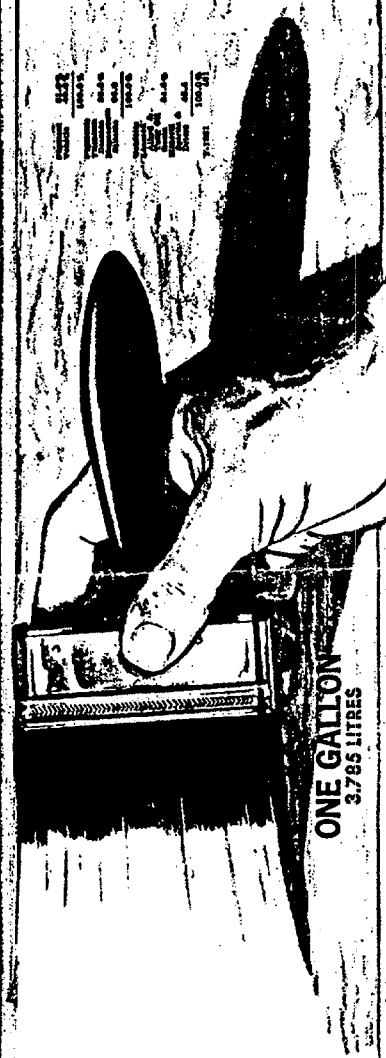

ONE GALLON
3.785 LITRES

Specially formulated with linseed-kung-ol resistance. For new wood, asbestos wall previously painted surfaces that are badly

DIRECT
Surface must be clean and free of dirt, Temperature of the surface to be painted

SURFACE

Wood
New or Unpainted
Remove bleeding paint a mixture of equal parts of turpentine and white spirit, etc., before

Previously Painted
In Poor Condition
Remove loose and flaking paint with a wire brush. All loose paint must be removed before applying finish

Metal
Iron and Steel
Prime with Rustin

Galvanized
Prime with Rustin

MATERIAL PREPARATION: Stir and mix thoroughly. Apply without thinning, although one part of turpentine or mineral spirits may be added if desired. Do NOT add water, linseed oil or other substances. May be tinted with Colors-In-Oil to shade of finish coat.

APPLICATION: Apply uniformly and evenly with brush or roller. Thin 10% to 15% with mineral spirits, and use 30 to 40 lbs. air

THE GLIDDEN COMPANY

GL 032874

N1897

Glidden

nce Mildew & Fume Resistant

NER FOR EXTERIOR WOOD SURFACES



Directions: Apply this paint to clean, dry wood surfaces. It is not to be used on metal or on masonry. It is not to be used on surfaces that are already painted with a different type of paint. It is not to be used on surfaces that are already painted with a different type of paint. It is not to be used on surfaces that are already painted with a different type of paint.

Weight 11.33
Volume 100.00
Density 0.86
Viscosity 100.00
Solids 40.00
Dry Time 24.00
Shelf Life 12.00
T-1001

EXTERIOR BASECOAT

Specially formulated with linseed-tung-oil alkylid to give a fume and mildew resistance. For new wood, asbestos wall siding and porous masonry surfaces. An previously painted surfaces that are badly weathered and porous. Formulated with

DIRECTIONS FOR EASY APPLICATION

Surface must be clean and free of dirt, mildew, rust, loose paint, blisters, grease. Temperature of the surface to be painted should not be below 50° F.

SURFACE	HOW TO PREPARE SURFACE AND
Wood New or Unpainted	Remove bleeding pitch with mineral spirits or turpentine. Seal a mixture of equal parts shellac and alcohol. Apply Basecoat or longer if atmospheric conditions are not ideal. Putty or joints, etc., before applying finish coat of Endurance or Endur
Previously Painted In Poor Condition	Remove loose and scaling paint. Reset nails. Putty or ca joints. Spot-prime bare spots, cracks, puttied areas or ent with Basecoat. Allow to dry 24 hours, longer if atmospher before applying finish coat.
Metal Iron and Steel	Prime with Rustmaster Primer. Follow directions on contol
Galvanized	Prime with Rustmaster Galvanized Primer. Follow directions

MATERIAL PREPARATION: Stir and mix thoroughly. Apply without thinning, although one-half pint of turpentine or mineral spirits may be added to each gallon of paint when using on porous or hot surfaces. DO NOT add water, linseed oil or driers to this paint. May be tinted with Colors-In-Oil to approximate shade of finish coat.

APPLICATION: Apply uniformly and evenly, working paint well into surface.

SPRAYING: Thin 10% to 15% with turpentine or mineral spirits, and use 30 to 40 lbs. air pressure.

COVERAGE: Covers ap gallon on new wood, and on previously painted sur

CLEAN-UP: Wash tool ROLLER CLEANER, min When used on surfac primed according to dir excellent results; howeve only to formula or san limited to the purchase

THE GLIDDEN COMPANY • CLEVELAND