


American Industrial Hygiene Association Journal

1971



RECEIVED
JAN 27 1971
NORTH CAROLINA

American Industrial Hygiene Conference
Royal York Hotel, Toronto, Canada
May 24-28, 1971

PLAINTIFF'S
EXHIBIT
tabbies WV-000396

PLAINTIFF'S
EXHIBIT
tabbies D1272.02

Exposure of Insulation Workers to Airborne Fibrous Glass

DOUGLAS P. FOWLER, J. LeROY BALZER and W. CLARK COOPER, M.D.
School of Public Health, University of California, Berkeley, California 94720

Ⓒ A study was undertaken to define the airborne concentrations of fibrous glass exposures of workers using prefabricated and other fibrous glass insulation materials. More than 100 fibrous glass products were examined and samples of airborne fibers were collected from various operations with such materials. Airborne concentrations ranged from 0.5 to 8 fibers/ml with mean fiber diameters from 2.2 to 8.4 micrometers. The mean diameter of fibers from the parent product were found not to be a reliable predictor of the mean diameter of the airborne fibers resulting from work with the products. The concentrations of airborne fibrous glass found in this study are not likely to be of long-term biological significance.

Introduction

THIS STUDY WAS UNDERTAKEN as part of our investigation of the work environment of insulating workers; and is a continuation of a previously reported study on the exposures of insulation workers to asbestos fibers and other environmental stresses.^{1,2}

The stated objective of this part of our study was: "To define qualitatively and quantitatively the airborne concentration of fibrous glass in the breathing zones of workers engaged in the fabrication, application, finishing, and other operations involved in the installation of prefabricated and other fibrous glass insulation materials." To attain this objective: (a) over 100 samples of fibrous glass insulation products were examined; (b) the conditions of use of these materials were evaluated during visits to over 50 construction sites where the materials were being installed by members of the International Association of Heat and Frost Insulators and Asbestos Workers Local 16 (Northern California and Northern Nevada); and (c) the actual concentrations of airborne fibrous glass were determined during representative installation operations by taking and analyzing samples of the air in the breathing zones of

those workers, and in areas surrounding operations.

The general work environment of insulation workers has been described previously, particularly in relation to asbestos exposure. There have been many of the chemical and physical properties of fibrous glass.³ The use of fibrous glass insulation has increased markedly in recent years, and it is now probably the most commonly used thermal and acoustical insulation material. As its uses have increased, so have the variety of forms in which it is produced. It has found widest use in the form of "batts" or "blankets" of light-density fibrous glass either with or without a backing material such as foil, vinyl, or treated paper. In this form it is used by the insulation worker to thermally insulate ventilation ducts and work. Another important source of exposure to the insulation worker is the handling of higher density "boards" of fibrous glass (which may be coated with Neoprene or other substances) used for the thermal or acoustical insulation of walls, ceilings and other surfaces, particularly in mechanical rooms and ventilation plenums of large buildings. A third primary source of glass fiber exposure is in the installation of fibrous glass

American Industrial Hygiene Association

insulation, in which half-compressed fibrous glass is used. Fibrous glass used by insulation workers for thermal insulation of mechanical equipment and are formed into special shapes.

Because of the varying work conditions of contractors, it is difficult to estimate a "typical" exposure to fibrous glass. It is probable that more than 90% of the insulation worker's work experience is in the installation of fibrous glass insulation in California and Nevada locations. However, usage varies and experience may be almost unlimited. Further, the use of these materials is continuing to increase.

The job classifications and the description of work with fibrous glass products do not apply to work with fibrous glass insulation. A man will ordinarily fabricate a single piece of fibrous glass insulation. Therefore, such classification except where definite tasks were observed.

Fibrous Glass Insulation Materials

Fifty-seven fibrous glass products were supplied by manufacturers in the project. Additional samples were collected in the field. These were duplicates of those supplied by the manufacturer. A representative sample of each product, a representative portion of all materials, and this sample was analyzed by phase contrast microscopy mounting medium with a refractive index below that of glass. The individual fibers were estimated with a Porton eyepiece reticle. The distribution of fibers in the field was estimated. Although it is customary to characterize particle size distribution by mean and geometric standard deviation, this was not done for these data. The distribution of fiber diameters was estimated by the expected simple log-normal distribution.

Although some of this data may be abnormality was undoubtedly

orkers to ass

CLARK COOPER, M.D.
ley, California 94720

strations of fibrous glass
ous glass insulation ma-
and samples of airborne
materials. Airborne concen-
ameters from 2.2 to 8.4
product were found not
ue fibers resulting from
ous glass found in this

nd in areas surroundin

ork environment of insu-
n described previously,
ion to asbestos exposure
of the chemical and phy-
ous glass.³ The use of fi-
as increased markedly i-
t is now probably the
thermal and acoustica

As its uses have incre-
ty of forms in which
ound widest use in the
kets" of light-density fi-
or without a backin-
water impermeable
vinyl, or treated paper
l by the insulation wo-
y insulate ventilation
oortant source of expo-
vorker is the handling
boards" of fibrous
ed with Neoprene or o-
r the thermal or acoust-
ceilings and other-
ly in mechanical ro-
ums of large building
e of glass fiber expo-
n of fibrous glass

insulation, in which half-round sections of compressed fibrous glass are used for thermal insulation. Fibrous glass products are also used by insulation workers for acoustical/thermal insulation of mechanical equipment, and are formed into special shapes on the job sites.

Because of the varying emphases of local contractors, it is difficult to estimate a "typical" exposure to fibrous glass, but it is probable that more than half of an average insulator's work experience (in the Northern California and Nevada local union studied) is with fibrous glass insulation of various types. However, usage varies and some insulators' experience may be almost totally with glass. Further, the use of these materials is continuing to increase.

The job classifications used by Balzer¹ for the description of work with asbestos-containing products do not appropriately describe work with fibrous glass products, since one man will ordinarily fabricate, apply, and finish a single piece of fibrous glass material. Therefore, such classifications are not used, except where definite separation of work tasks was observed.

Fibrous Glass Insulation Materials

Fifty-seven fibrous glass insulation products were supplied by manufacturers cooperating in the project. Additional samples of 50 products were collected in the field, some of which were duplicates of those supplied. From each product, a representative sample was taken, including portions of all apparent types of material, and this sample was examined under phase contrast microscopy at 430X using a mounting medium with a refractive index below that of glass. The diameters of 50 individual fibers were estimated by comparison with a Porton eyepiece reticle, and the size distribution of fibers in each product determined. Although it is customary to characterize particle size distributions by geometric mean and geometric standard deviation, this was not done for these data, since the distribution of fiber diameters did not exactly fit the expected simple log-normal distribution.

Although some of this deviation from log-normality was undoubtedly due to sampling

variation, which was then magnified in effect by our relatively small samples, much of the deviation is "real," and was confirmed for several products by sizing 400 to 500 fibers. There was "smoothing" of the size distribution curves, and extension of the "range" of sizes encountered in larger samples; but the basic conclusions were not changed.

To permit comparison among materials, accumulated data on product fiber diameters are summarized in Table I.

Exposures of Insulation Workers

The exposures of insulation workers to fibrous glass, like their exposures to other environmental contaminants, cannot be described by time-weighted average exposures because of the nature of the trade. An insulation worker will be exposed, during a working day, to a series of "peak exposures" to the material which he is handling. One man will ordinarily cut, apply, and finish a single piece of glass fiber insulation material. This differs from the situation usually found in a production plant, or in some applications of asbestos-containing products, where a worker may repeat a single operation for most of his working day, so that environmental contamination tends to fluctuate less widely. The insulation worker moves about frequently, and may work on several floors of a large building in a single working shift, with a consequent variety of exposure to environmental contaminants. Further, the worker who today is installing calcium silicate insulation in an enclosed boiler room, with extremely high concentrations of airborne asbestos fibers, may

TABLE I
Diameters of Fibers of Various Fibrous Glass Products

Material	No. of Samples	Range of arithmetic Means (μm)	Mean of Means (μm)
Duct liner	23	4.4-17.0	6.7
Duct wrap	11	4.1- 9.4	5.4
Industrial			
Wall insulation	18	4.4-10.7	8.1
Pipe insulation	8	4.4- 9.0	7.0
Prefabricated duct	11	5.7-11.5	8.0
Basic fiber	6	5.0-11.5	8.8
Acoustical tile	5	4.0-11.4	9.1
Miscellaneous	6	4.0- 7.6	5.5
Packing wool	4	7.0- 9.0	8.0
Building insulation	14	4.9-11.5	8.2

TABLE II
Concentrations and Dimensions of Airborne Fibers from Various Operations
Using Fibrous Glass Insulation

Operation	Site #	Parent Material		Air Samples: Breathing Zone			Air Samples: Area		
		mean fiber diameter (μm)	fibers/ml	mean fiber diameter (μm)	Length % *		mean fiber diameter (μm)	Length	
					<78 μm	>78 μm		<78 μm	>78 μm
Duct Wrapping	1	5.3	1.26	4.7	24	76	0.09	4.0	43
		6.3	0.90	4.0	40	60			
		6.4							
	2	4.0	0.51	3.4	46	54	0.02	5.5	40
			0.79	3.6	36	64			
	3	4.1	1.40	2.6	62	38	0.03	3.7	78
			1.33	2.3	60	40			
	5-IV	7.5	0.80	2.5	83	17			
Wall & Plenum Insulation	8	5.8	1.20	6.2	37	63	0.07	3.7	62
		5.5	2.34	5.0	42	58	0.03	4.5	54
	4	7.2	0.53	7.4	30	70	<0.01	—	—
	5-I	10.2	3.26	8.4	47	53	0.09	6.2	50
		8.1	4.18	3.5	59	41	0.08	7.9	49
		7.6					0.47	2.8	55
	7-II	7.8	8.08	3.8	60	40	0.34	2.2	60
		8.1							
	5-III	8.5	0.93	3.1	71	29	0.05	2.3	86
			0.48	4.1	40	60	0.05	2.6	88
		6.7	0.57	3.4	50	50	0.03	2.6	86
		6.0					0.02	3.1	66
		6.0					0.09	3.3	66
Pipe Insulation	6	5.6					0.09	2.9	65
Fan Housing Insulation	5-II	6.9	1.57	3.5	88	12	0.20	3.4	82

*78 μm is the equivalent length of the major division of the Perton reticle with our optical system.

tomorrow be wrapping ducts with fibrous glass in a relatively open area of the same building, with natural ventilation from open windows serving to remove airborne glass fibers from his vicinity nearly as soon as they are produced. Exposures, then, cannot be accurately characterized as though they were constant, but must be related to the work being performed at the time of the exposure. Short term sampling periods are required in order to assess the environmental exposure.

Concentrations of Glass Fibers in Air

In Table II are shown the mean fiber diameters of the fibrous glass materials used, and concentrations and sizes of the airborne glass fibers found during installation of fibrous glass insulation at the construction sites from which air samples were taken.

Sampling techniques used in this study have been described previously.² Briefly, air for breathing zone samples was drawn

through 0.8 μm (mean pore size) Millipore membrane filters by MSA Monitaire pumps at flow rates of 2 to 3 liters per minute. Air samples were taken in the same way, except that pumps with flow rates of 25 to 30 liters per minute. The filter holders for the area samples were about 5 to 6 feet above the level and 10 to 20 feet away from the operations of the installation operations. Sampling periods were 20 to 60 minutes.

It will be noted that none of these results are expressed "gravimetrically" (e.g., glass/m³ air). The air at construction sites is notoriously dusty, and any attempt to relate a total gravimetric sample to the concentration of fibrous glass is impractical and misleading. Secondly, the tentative Threshold Limit Value (American Conference of Governmental Industrial Hygienists) of 0.5 mg/m³ for fibrous glass only applies to fibers with diameters less than 5 to 7 micrometers. Our experimental work has shown that the




FIGURE 1. Accumulated fiber diameters from various operations.

is no size-selective removal of all fibers less than this range and rejection of fibers greater than this range. Thus, the requirements of airborne fibers, size and weight of individual fibers, with many fibers we estimate that a sample of 1 ml with a mean air fiber diameter of 50 micrometers and a concentration of 50 fibers/ml is approximately the same as a concentration of 1.3 fibers/ml. This concentration of fibers is approximately the same as the concentration of fibers of course varies with the distribution.

Discussion

The exposures to fibrous glass during construction of glass insulation projects are 0.3 fibers/ml with a mean fiber diameter of 1.3 fibers/ml. This is less than their exposure to other materials.² The potential health effects of construction trades as a result of "fallout" of fibers were still lower, 0.1 fiber/ml to 0.47 fiber/ml.

Various Operations

Air Samples: Area			
Fiber/ml	mean fiber diameter (μm)	Length %	
		<78 μm	>78 μm
19	4.0	43	57
2	5.5	40	60
13	3.7	78	22
7	3.7	62	38
3	4.5	54	46
1	—	—	—
9	6.2	50	50
8	7.9	49	51
7	2.8	55	45
4	2.2	60	40
5	2.3	86	14
6	2.6	88	12
1	2.6	86	14
2	3.1	66	34
3	3.5	66	34
4	2.9	65	35
5	3.4	82	18

optical system.

mean pore size) Millipore by MSA Monitaire pump at 3 liters per minute. As in the same way, use rates of 25 to 30 liters per holders for the air at 5 to 6 feet above floor away from the location operations. Sampling 60 minutes.

that none of these results "gravimetrically" (e.g., the air at construction is dusty, and any attempt to take a gravimetric sample to the construction site is impractical and, the tentative Threshold Limit Value (American Conference of Governmental and Industrial Hygienists) of 0.1 fiber/ml for glass only applies to fibers less than 5 to 7 micrometers. Work has shown that the

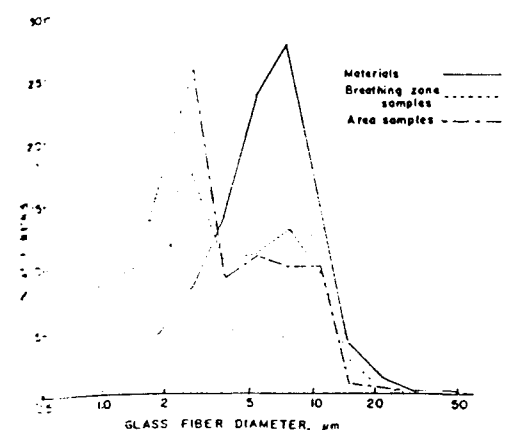


FIGURE 1. Accumulated percentage distribution of fiber diameters from all sampling sites.

is no size-selective sampler which will collect all fibers less than any specific diameter in this range and reject all larger fibers (or vice-versa). Thus, the only way to comply with the requirements of the TLV is to collect all airborne fibers, size them, and estimate the weights of individual fibers. Using this procedure, with many simplifying assumptions, we estimate that a concentration of 1 fiber/ml with a mean airborne fiber diameter of 4 micrometers and a mean airborne fiber length of 50 micrometers is equivalent to a gravimetric concentration of 1 to 1.5 mg/m³ of total fibrous glass. The estimated gravimetric concentration of fibers to which the TLV is applicable (less than 7 micrometers in diameter) is approximately 0.5-0.7 mg/m³ for a fiber concentration of 1 fiber/ml, although this of course varies with the fiber size distributions.

Discussion

The exposures of insulators to airborne fibrous glass during the application of fibrous glass insulation products ranged from 0.5 to 8 fibers/ml with a median of 1.26 and mean of 1.8 fibers/ml. This is significantly lower than their exposures to other fibrous materials.² The potential exposures of other construction trades to airborne glass fibers as a result of "fallout" from insulating operations were still lower, ranging from below 0.02 fiber/ml to 0.47 fiber/ml with a median of

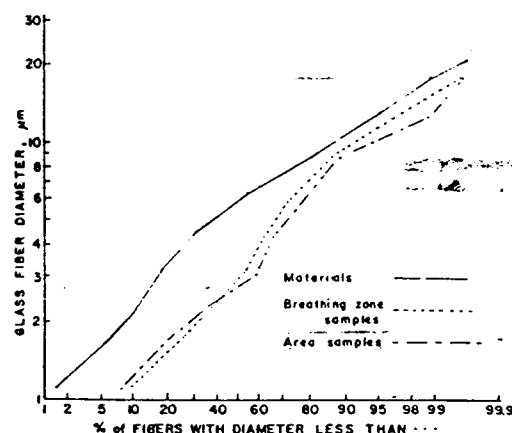


FIGURE 2. Cumulative distribution of fiber diameters from all samples.

0.07 fiber/ml and a mean of 0.1 fiber/ml, at a distance of 10 to 20 feet from the insulator during his application of fibrous glass materials.

The maximum levels were found in confined spaces, where there was little circulation of air, and where clean-up (including sweeping and packing of scraps of fibrous glass residue) had generated high concentrations of airborne dust of all kinds. Although, as stated previously, it is difficult to generalize about the occupational environment of the insulator, it is probable that exposures of this sort are relatively rare. It is most common for clean-up to take place only at the end of a work shift. Because of the bulkiness of fibrous glass insulation products, cutting is usually done in a relatively open area which affords the space necessary for layout and measurement.

One of the striking findings of the study, as shown in Figure 1, is that the mean fiber diameter of the parent products is not a reliable predictor of the mean diameter of the fibers in the aerosol generated from these products. Although the determinants of "respirability" of airborne fibers are not fully agreed upon, it is probable that respirability is diameter-dependent.⁴ Timbrell's experiments, using the aerosol spectrometer, suggested that fibers with densities of less than 3.5 g/cm³ and large aspect ratios (length to width ratios) could be considered "respirable" if the fiber diameter was less than 3.5 micro-

meters. Fibrous glass (with a density of 2.4-2.6 g/cm³) fits his definition and thus glass fibers less than 3.5 microns in diameter will be defined as "respirable." As can be seen in Figure 2, about one half of the airborne glass fibers generated from the handling of fibrous glass insulation materials are below this upper limit. Thus, it would seem that the often encountered statement that the diameter of the majority of glass fibers is such that they will not penetrate to the lower respiratory tract is true of the parent materials, but generally not of the airborne fibers which are of primary concern in occupational health.

Although our observations might appear to be at variance with those of Johnson *et al.*,⁵ who recently studied the airborne dust concentrations in glass fiber insulation and textile manufacturing plants, our conclusions are essentially the same as theirs; the concentrations of small diameter airborne fibers are very low.

What do the concentrations of fibrous glass which were found mean in terms of potential hazard to health? The consensus of present opinion is that fibrous glass, although mechanically irritating to the skin and upper respiratory tract, is *per se* relatively inert and that it does not cause chronic pulmonary disease when inhaled.⁶⁻⁹ Although Milby and Wolf have reported cases indicative of respiratory irritation in individuals who had removed insulation materials or otherwise been exposed to fibrous glass,¹⁰ and Murphy in 1961 reported a case of hemorrhagic bronchiolitis after heavy exposure to dust during removal of glass insulation,¹¹ no documented cases of pneumoconiosis or other chronic pulmonary diseases due to fibrous glass are known to us. Intubation studies in lower animals have shown relatively little biologic activity.^{12,13}

This is the basis upon which the American Conference of Governmental Industrial Hygienists, in 1969, set the tentative threshold limit value for fibrous glass at the same level as that for inert dusts, now 10 mg/m³ (for fibers under 5 to 7 micrometers in diameter). Although gravimetric determinations of glass are not feasible in the construction trade, the fiber counts that we observed have been cal-

culated to represent amounts of glass far below the TLV. These were the concentrations during actual installation operations and time-weighted averages. The insulator's time-weighted average would be much lower than the figures given.

Because there are unquestionably respirable fibers in most fibrous glass materials and there are many possible variations in coating binders, etc., prudence dictates that there be continued surveillance of the exposure of various groups to fibrous glass as is being done by the Public Health Service.⁵ The assurance of absence of chronic effects should be checked by appropriate long-term observation of those whose work involves frequent or daily inhalation of glass.

Conclusions

1. Insulation workers, during the actual application of fibrous glass insulation products, were exposed to airborne concentrations of glass fibers ranging from 0.5 to 8 fibers/ml with a median of 1.3 fibers/ml and mean of 1.8 fibers/ml.

2. The computed gravimetric concentrations of airborne glass fibers less than 7 microns in diameter did not exceed the tentative Threshold Limit Value of 10 mg/m³ during any peak period. The majority of these measurements were less than 1.0 mg/m³.

3. No time-weighted average could be computed which would be representative of a work day exposure. In any case, it would be considerably less than the peak concentrations measured.

4. Insulators work with fibrous glass-containing materials from less than 10% to 100% of their time depending on employer and type of construction site.

5. It is doubtful that the concentration of airborne fibrous glass found in our study has any long-term biological significance.

Acknowledgments

The technical assistance of Mr. James Murchio and microscopy of Mr. Arturo Leon are gratefully acknowledged. This research was supported in part by the National Insulation Manufacturers Association.

References

1. BALTZ, J. L.: Industrial Hygiene for Insulation Workers. *J. Occup. Med.* 10: 1 (Jan. 1968).

2. BALTZ, J. L., and A. M. MURCHIO: Measurement of Insulating Vapors. *J. Occup. Med.* 10: 222 (1968).
3. McCORMACK, C. P.: Fibre Glass. *J. Occup. Med.* 9: 3 (1967).
4. JAMES, V.: The Health Effects of Asbestos. *J. Occup. Med.* 31: 1965.
5. JOHNSON, D. L.: The Manufacture of Fibrous Glass. *J. Occup. Med.* 10: 545 (1969).
6. NIOSH, A. N. M.: Pulmonary Fibers. *J. Occup. Med.* 10: 545 (1969).
7. KENNEDY, J. L.: Health Effects of Asbestos. *J. Occup. Med.* 10: 545 (1969).
8. American Lung Association, 5231 North Lincoln Avenue, Chicago 15232 (1970).
9. JOHNSON, H. M., D. L. JOHNSON, and H. M. JOHNSON: *J. Occup. Med.* 10: 545 (1969).

The Bureau is presenting a 29-April 2, 1970 staff, and releases an open methods at the and organizational equipment and logical, pathologic reviewed. Antitoxins, and was opportunity to to man, emergency. Inquiries made Safety and Health made by telephone.

A five-day, co-sponsored by the University of California in Berkeley towards the practice of the Federal concepts of noise and impairment, the effectiveness of the control measures receive the 1967 Service and the Hygiene Association.

Advanced enterprises. The continuing Education for California, 2223 Fulton

represent amounts of glass far in excess of those found in the air. These were the concentrations found during installation operations and not during use. The insulator's exposure would be much lower than these averages. Even so, these levels are unquestionably respirable. The possible variations in coating thickness and the prudence dictates that there be surveillance of the exposures to fibrous glass as is being done by the Health Service.⁵ The assumption that the toxic effects should be checked by long-term observation of the workers involves frequent or daily measurements.

The workers, during the actual installation of fibrous glass insulation products, are exposed to airborne concentrations ranging from 0.5 to 8 fibers/ml and mean values of 1.3 fibers/ml and mean values of 1.3 fibers/ml and mean values of 1.3 fibers/ml.

Based on gravimetric concentrations, the concentration of glass fibers less than 7 μ m in diameter should not exceed the tentative recommended value of 10 mg/m³ during installation. The majority of these measurements are less than 1.0 mg/m³. The average could be representative of the exposure. In any case, it would be less than the peak concentration.

Work with fibrous glass could be done with exposure from less than 10% to 100% of the recommended value depending on employer and type of work. It is noted that the concentrations found in our study are of statistical significance.

The assistance of Mr. Jack D. Murphy, M.D., in the autopsy of Mr. Arturo De la Cruz is acknowledged. This study was supported in part by the National Glass Insulators Association.

Industrial Hygiene for Insulation Workers, 1 (Jan. 1968).

1. BALZER, J. L., and W. C. COOPER: The Work Environment of Insulating Workers. *Amer. Ind. Hyg. Assoc. J.* 29: 222 (1968).
2. McCORE, C. P.: Fiber Glass—Chemistry and Technology. *J. Occup. Med.* 9: 339 (July 1967).
3. TIMPHELL, V.: The Inhalation of Fibrous Dusts. *Biological Effects of Asbestos*. N. Y. Academy Science 132: 233 (Dec. 31, 1965).
4. JOHNSON, D. L., et al.: Exposure to Fibers in the Manufacture of Fibrous Glass. *Amer. Ind. Hyg. Assoc. J.* 30: 545 (1969).
5. NASR, A. N. M.: Pulmonary Hazards from Exposure to Glass Fibers. *J. Occup. Med.* 9: 345 (July 1967).
6. KOZLEN, J. L.: Health of Fibrous Glass Workers. *Trans. 3rd Annual Meeting, Industrial Hygiene Foundation of America, Inc.*, 5231 Centre Avenue, Pittsburgh, Pennsylvania 15232 (1970).
7. CHAMBERLAIN, H. M. D.: IHF Statistical Studies of Health of Fibrous Glass Workers. *Proceedings Fibrous Dust Seminar, Nov. 22, 1968* (Medical Series: Bulletin No. 16-70).
8. Industrial Hygiene Foundation of America, Inc., 5231 Centre Avenue, Pittsburgh, Pennsylvania 15232 (1970).
9. GROSS, P.: A Comparison of the Effects in Experimental Animals of Certain Fibrous Dusts. *Proceedings Fibrous Dust Seminar, Nov. 22, 1968* (Medical Series: Bulletin No. 16-70) Industrial Hygiene Foundation of America, Inc., 5231 Centre Avenue, Pittsburgh, Pennsylvania 15232 (1970).
10. MILBY, T. H., and R. C. WOLF: Respiratory Tract Irritation from Fibrous Glass Inhalation. *J. Occup. Med.* 11: 409 (Aug. 1969).
11. MURPHY, G. B.: Fiber Glass Pneumoconiosis. *AMA Arch. Environ. Health* 3: 704 (Dec. 1961).
12. SCHEPERS, G. W. H.: The Biological Action of Glass Wool. *AMA Arch. Environ. Health* 12: 280 (Sept. 1955).
13. GROSS, P., et al.: The Pulmonary Response to Fibrous Dusts of Diverse Composition. *Amer. Ind. Hyg. Assoc. J.* 31: 125 (1970).

— Received June 8, 1970

Safety in the Laboratory

The Bureau of Occupational Safety and Health, U. S. Public Health Service, is presenting a course "Safety in the Laboratory" in Cincinnati, Ohio, March 29-April 2, 1971. This course is intended to train safety managers, laboratory staff, and related workers in the control of accidental injuries. The course provides an opportunity for staff members to be reappraised of the facilities and methods at their disposal to minimize injury in the laboratory. Administrative and organizational aspects as well as design and construction of laboratory equipment and facilities will be discussed. Methods of handling reagents, biological, pathological, radioactive, and other materials and specimens will be reviewed. Animal care and related facilities, protection from extreme temperatures, and waste storage and disposal are to be included. The trainee will have opportunity to investigate ventilation systems, clean rooms, diseases transferable to man, emergency aid, noise, and other pertinent subject matter.

Inquiries may be addressed to Training Branch, Bureau of Occupational Safety and Health, 1014 Broadway, Cincinnati, Ohio 45202 or inquiries may be made by telephone to (513) 684-3287.

Measures for Industrial Noise Control

A five-day course on Measures for Industrial Noise Control will be co-sponsored by the University of California and the National Council on Noise Abatement in Berkeley, California on March 22-26, 1971. This course is directed towards the practical steps needed to meet the requirements of the noise amendment of the Federal Walsh-Healey Act. The course will deal with basic concepts of noise and noise measurement, prediction of noise-induced hearing impairment, the effect of noise on speech and work performance, and hearing conservation programs. Major emphasis will be placed on case histories of noise control measures and their effectiveness in various industries. Each enrollee will receive the 1967 guide on *Industrial Noise* issued by the U. S. Public Health Service and the 1966 *Industrial Noise Manual* of the American Industrial Hygiene Association.

Advanced enrollment is required and may be made by individuals or companies. The enrollment is \$315. For further information please write to Continuing Education in Engineering, University Extension, University of California, 2223 Fulton Street, Berkeley, California 94720.