


Specifications for Doyle Automotive Vacuum Cleaners Models 72A and 73A

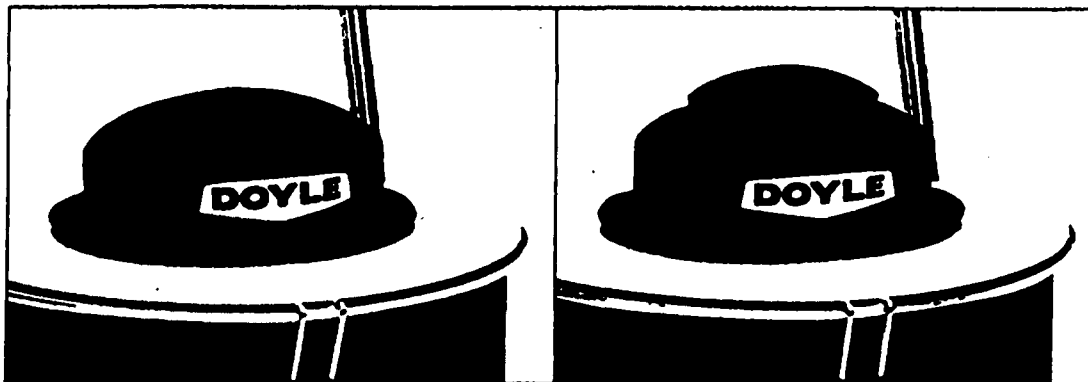

Model 72A

Dry Recovery Model

Dry incoming air enters tank, passes through filter and circulates over motor for cooling action.

Model 73A

Wet/Dry Recovery Model

Moist incoming air enters tank, passes through filter and is discharged away from motor (by-pass). Separate vents permit normal air to pass over motor for cooling.

Specifications

Models:

72A Dry Material only; 73A Wet/Dry Materials

Capacity:

16-gallon steel tank holds 9 gallons (2,079 cubic inches) of recovered material

Electric:

Powerful 1½ hp. (maximum mechanical horsepower) with two fans. 20-foot, #18 gauge, 3-wire cable with grounding plug. Listed by Underwriter's Laboratories, Inc.

Filter:

Semi-self-cleaning filter separates dust and dirt with flex action. Molded filter ring gasket assures air-tight fit on tank.

Dimensions:

34" high x 19" wide x 20" front to back.

Construction:

Tank is 20 gauge steel, lock-seamed and welded. Rigid 16-gauge top. Two-wheel truck style dolly with 16-gauge full extended platform and front caster wheel. Man-sized three-piece 1" diameter chrome-plated handle attaches securely to dolly platform and double bolts to tank.

Finish:

Attractive automotive red and aluminum epoxy finish, inside and out.

Tools:

Comes with 10-foot plastic reinforced 1½" hose with heavy-duty ABS plastic hand tool.

Shipping:

50 lbs. x 4.96 cu. ft.

Manufactured by:

Doyle Vacuum Cleaner Company
225 Stevens Street S.W.
Grand Rapids, Michigan 49502

Sold by:

8004 1903