
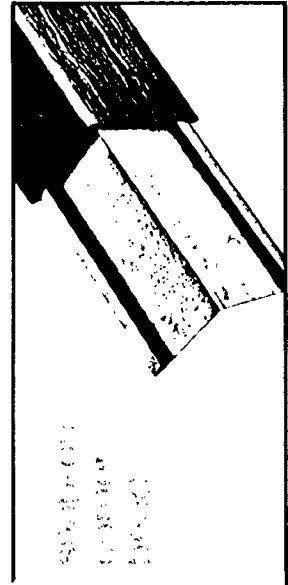
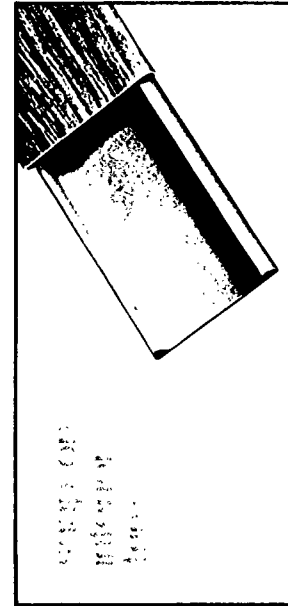


smooth surface system:


Demountable wall systems are installed with appropriate or approved color-matched moldings. Panels may be applied with G-P Drywall Adhesive directly to metal studs, wood framing or furring strips. For application directly to masonry walls, use G-P Grabit Masonry Adhesive.

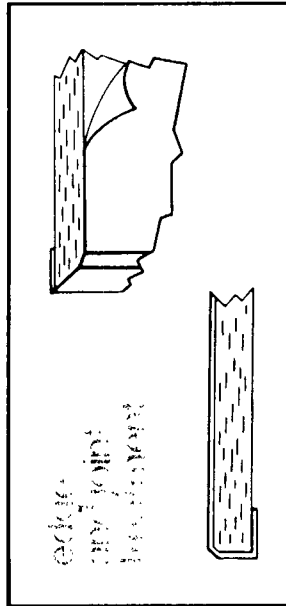


Georgia-Pacific Eternawall Smooth Surface System provides a continuous smooth surface appearance in a variety of colors and textures. Panels are 4' wide and 1/2" and 5/8" thick with either a regular or Firestop* gypsumboard core. Smooth Surface System is a special order product requiring 8 to 10 weeks delivery time.

This Eternawall system is suitable for installation over existing walls or application to wood or steel stud framing. Vinyl surfaced Eternawall is shipped from the factory with flaps on each edge. A special modified round edge, used in conjunction with fast setting G-P Speed-Set™ joint compound, results in a seamless appearance to the finished surface.

Factory laminated Eternawall saves field laminating.

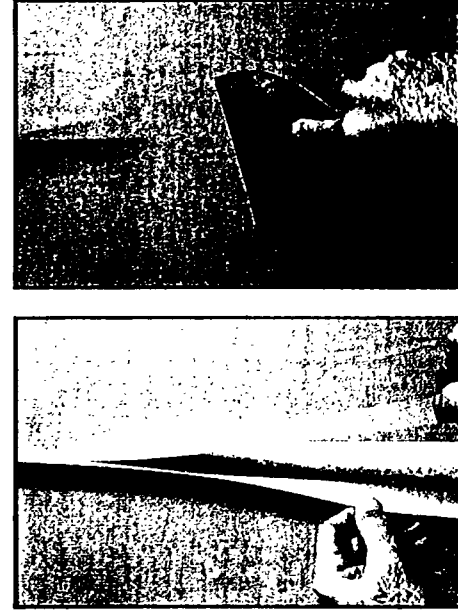

color selector

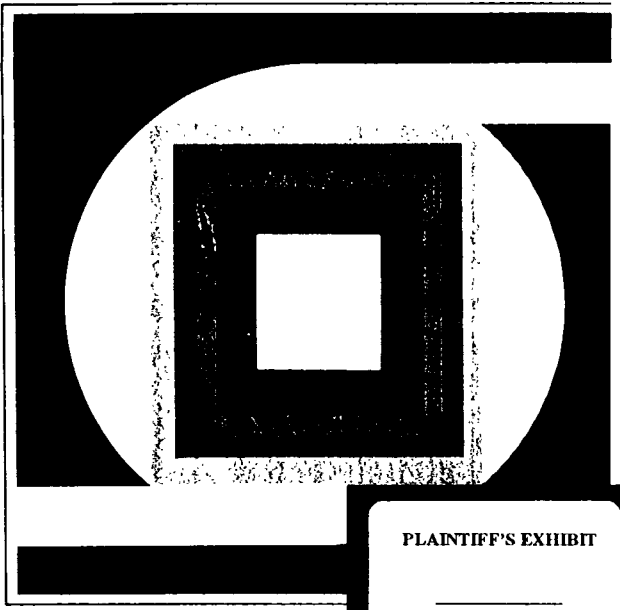

PLAINTIFF'S EXHIBIT

GP-1123



GeorgiaPacific
Gypsum Division, Portland, Oregon 97204

Eternawall color selector

NONCOMBUSTIBLE GYPSUM WALLBOARD COMBINED WITH THE BEAUTY OF VINYL.


THE INSIDE IS GYPSUM AND THAT MEANS:

1. Noncombustible
 2. Dimensionally Stable
 3. Fire Resistance Ratings
 4. Sound Control
 5. Structural Strength
1. Colorfast
 2. Flame Resistant
 3. Abrasion Resistant
 4. Stain and Chemical Resistant
 5. Damp cloth clean up


If you want all of these qualities in an easy to install panel—you want the Georgia-Pacific vinyl covered wall—**ETERNAWALL**.

FOR MORE INFORMATION, CONTACT THE GYPSUM BOARD DIVISION OF GEORGIA-PACIFIC CORPORATION, 1000 ATLANTA ROAD, ATLANTA, GEORGIA 30303.


Noncombustible Eternawall panels are factory laminated with a quality washable vinyl film. The vinyl provides a permanent scuff, crack, chip and fade resistant surface. This is a wall panel that really takes punishment and is designed for use in high traffic areas and for movable partitions. Installation experience has proven that vinyl surfaced gypsum-board is less expensive than regular gypsumboard with field applied vinyl.

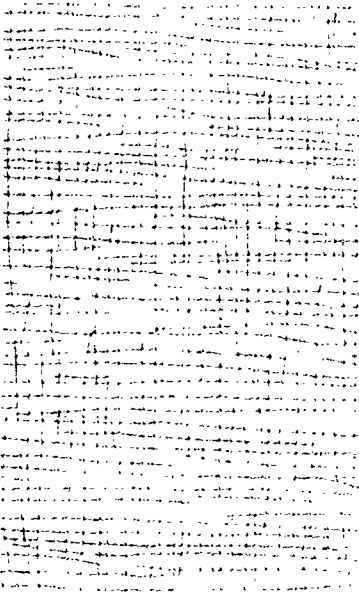

FLAX GP-688



TANGERINE GP-702



STUCCO GP-705

WILLOW GREEN GP-701



ALABASTER GP-703

RUFF GP-704



PECAN GP-683

CHERRY GP-681

BEIGE GP-687



AVOCADO GP-685

WHITE GP-686

Standard panels are 4' x 8' or 4' x 10' with other lengths available on special order. Standard thickness is 1/2" with 3/8" or 5/8" on special order. The panels are easily field cut by scoring the vinyl surface and snapping the board.

Eternawall in partition constructions, will give the same fire resistance rating as the equivalent thickness and type of regular gypsum wallboard.

Fire Hazard Classification: Gypsum core wallboard surfaced on both sides with paper or with supported or unsupported vinyl film on one side.

	Without Vinyl Facing	With Vinyl Facing
Flame Spread	15	25
Fuel Contributed	15	10
Smoke Developed	0	20-50


Classified by Underwriters' Laboratories, Inc., Building Materials List January, 1972

Color Variation—Since manufacturers of the vinyl film used on Eternawall are made to a commercial color match, minor color variations are possible. Panels applied on single walls or visual areas should be matched to minimize any slight color variations in the vinyl film.



WALNUT GP-682

FAWN GP-682



COLD GP-684

SNOWDRIFT WHITE GP-681


Georgia-Pacific




EternawallTM

vinyl surfaced
gypsum wallboard

color selector

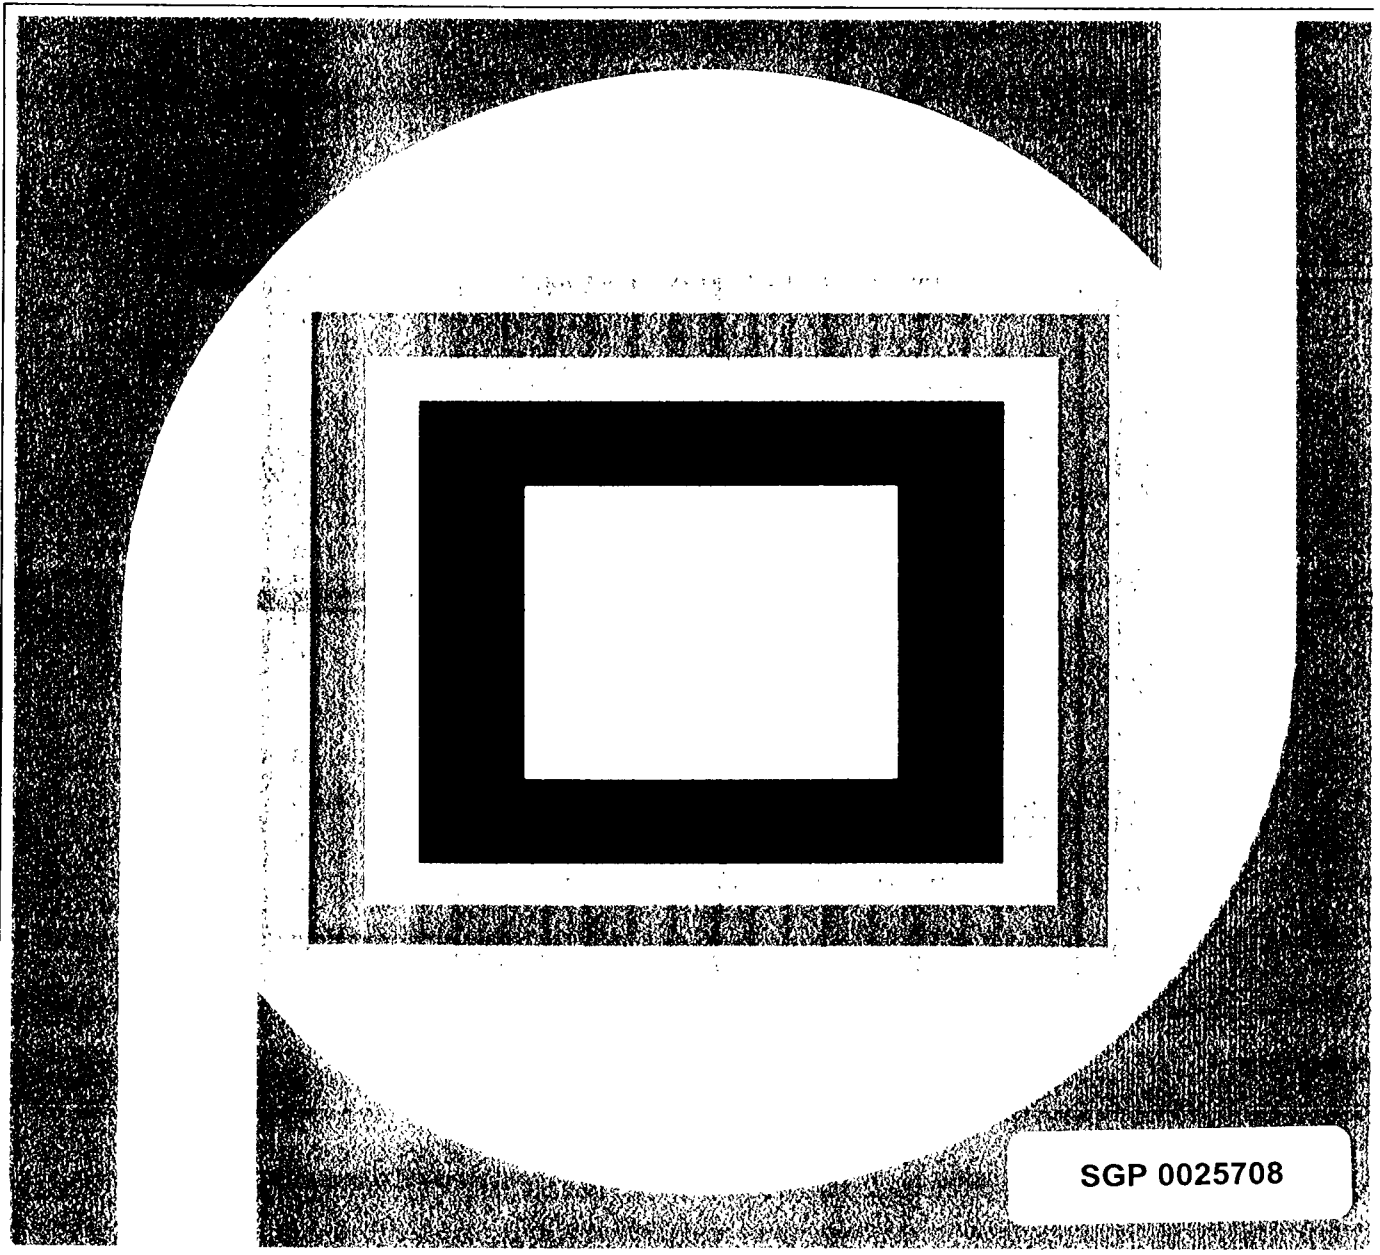


SGP 0025708

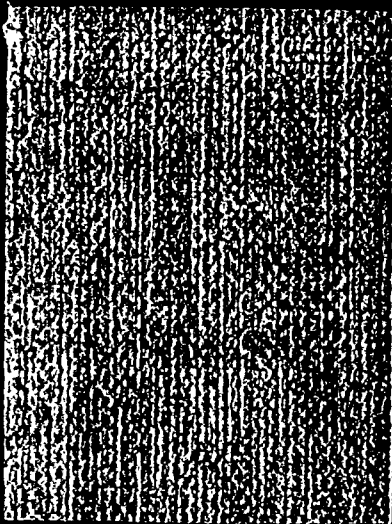


WILLOW GREEN GP-701




BUFF GP-704




PECAN GP-683

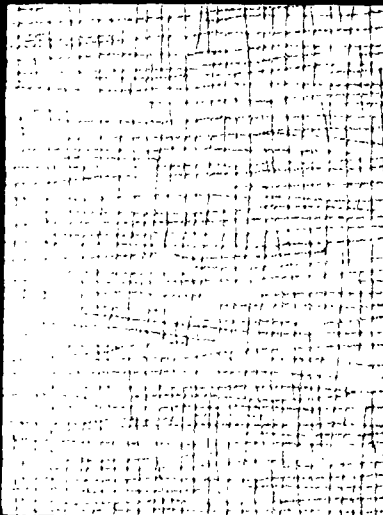

FLAX GP-688

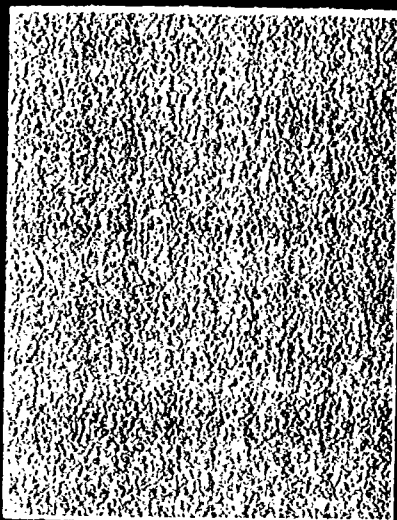

GOLD GP-684

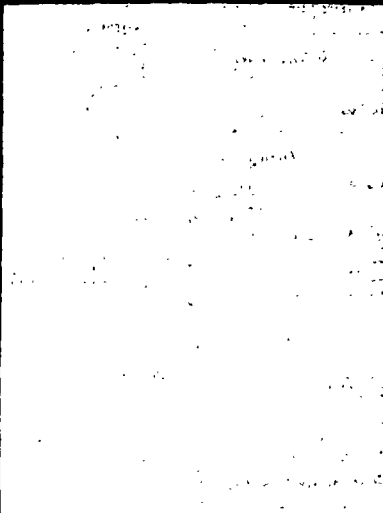

SNOWDRIFT WHITE GP-651

Georgia-Pacific



Standard Eternawall

Georgia-Pacific Eternawall is vinyl, factory laminated to gypsum wallboard. Eternawall is designed for use in interior partitions and in high traffic areas of commercial and institutional construction. A pre-decorated wall system that goes up in one step. Just put up Eternawall and your wall is done. Completely decorated!

The inside is gypsum and that means . . .

Sound control.

Fire resistance.

Strength.

Lightweight.

The surface is vinyl. That means it's . . .

Tough

Colorfast.

Flame and abrasion resistant.

Durable . . . lasts in spite of hard wear.

Easily cleaned with a damp cloth.


Eternawall is so durable, it can be reused, over and over. So, it could very well be perfect for demountable wall systems, too. This is quite a wall. Nothing's perfect, but Eternawall is the toughest, easiest, most people-proof wall we know of and that's close to being perfect!

Eternawall™
THE PERFECT WALL

SGP 0025709



STUCCO GP-705

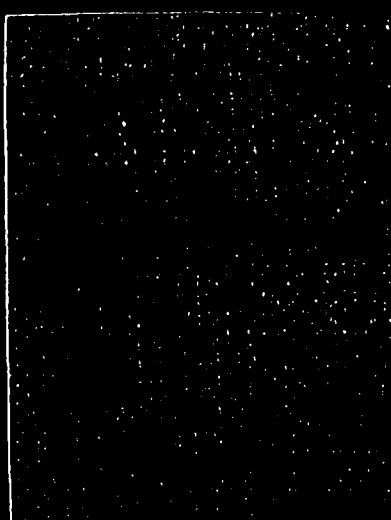


TANGERINE GP-702



ALABASTER GP-703




BEIGE GP-687

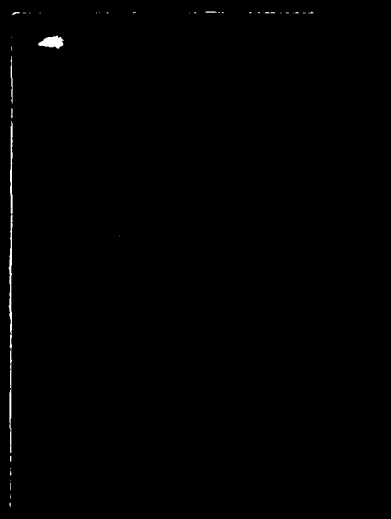


WALNUT GP-682



CHERRY GP-681

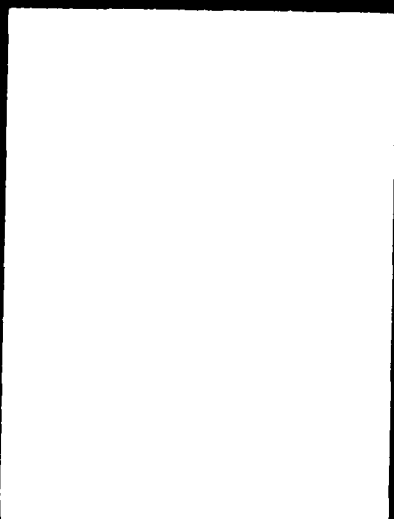

WHITE GP-686

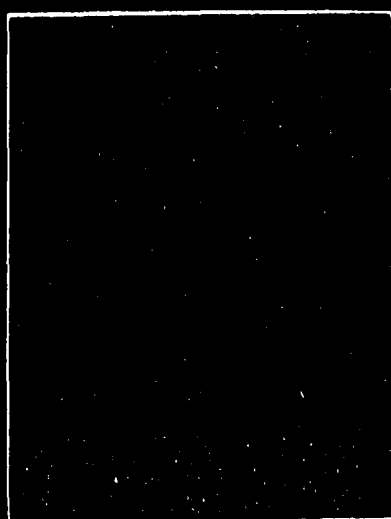

AVOCADO GP-685



FAWN GP-652

SGP 0025710

Eternawall™ Vinyl Surfaced Gypsum Wallboard

Thickness: $\frac{3}{8}$ " , $\frac{1}{2}$ " and $\frac{5}{8}$ " Regular Gypsum Wallboard, $\frac{1}{2}$ " and $\frac{5}{8}$ " Firestop Gypsum Wallboard. $\frac{1}{2}$ " Regular Eternawall is the stock thickness.


Sizes: 4'x7' to 4'x16' in one foot increments. Special lengths on request. Special size (length and width) Eternawall partition board available on special order basis. 4'x8' and 4'x10' are stock sizes.

$\frac{3}{8}$ " , $\frac{1}{2}$ " and $\frac{5}{8}$ " wallboard consisting of gypsum core, surfaced on both sides with paper or with a supported or unsupported vinyl-facing on one side.  labeled product available.


	Fire Hazard Classification Basic Board	With Vinyl Facing
Flame Spread	15	25
Fuel Contributed	15	10
Smoke Developed	0	20-50

Source: Underwriters' Laboratories Inc.


EDGE DETAIL

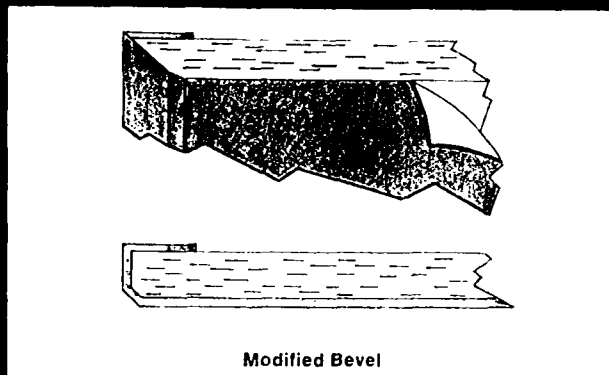

TRIM ACCESSORIES

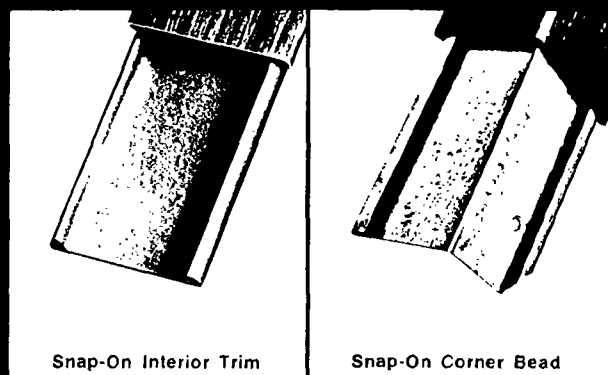

Color coated stainless steel nails are available to match all Standard colors and woodgrains. Trim accessories are available in 8'x10' lengths to match all standard colors and woodgrains.

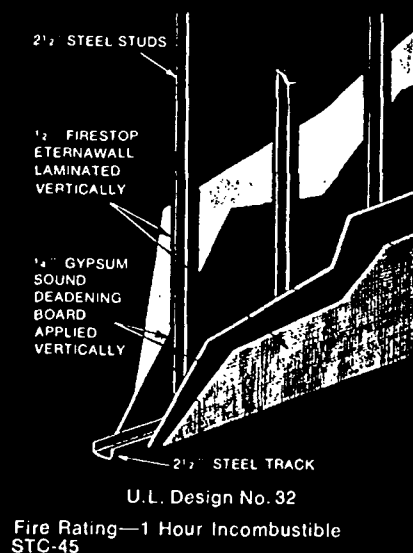

These fire and sound rated vinyl-surfaced wallboard systems eliminate the need for battens. G-P Firestop Eternawall is laminated directly to G-P $\frac{1}{4}$ " Incombustible Gypsum Sound Deadening Board. They are not only simple to install but they are inexpensive and provide a very durable wall.

Georgia-Pacific



Gypsum Division/Portland, Oregon


SGP 0025711

ET-50-12/71-15G

KALWOOD MATCHING MOLDINGS FOR ETERNAWALL

ETERNAWALL VINYL LAMINATED TO ALUMINUM EXTRUSIONS

		$\frac{3}{8}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "
GEO. PACIFIC DISTRIB. CENTERS BESTWALL PLANTS	OUTSIDE CORNER	.20	.23	.25
	INSIDE CORNER DIVIDER END CAP	.19	.21	.24
DEALERS SUGGESTED COSTS	OUTSIDE CORNER	.29	.32	.34
	INSIDE CORNER DIVIDER END CAP	.28	.30	.33

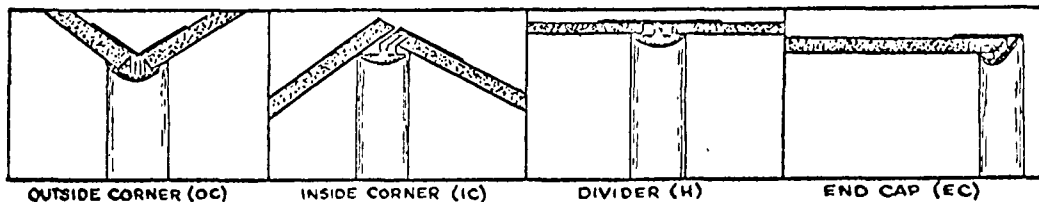

- ALL ABOVE QUOTES ARE PER LINEAL FOOT COST—FOB MANCHESTER, N. H.
- TERMS 1% 10 DAYS NET 30
- SHIPMENTS FOR STANDARD COLORS 2-7 WORKING DAYS AFTER RECEIPT OF ORDER
- STANDARD LENGTHS 8' & 10' INDIVIDUALLY SLEEVED IN POLYETHYLENE
- OUTSIDE CORNERS 10 PCS. PER TUBE; ALL OTHER SHAPES 20 PCS. PER TUBE
- COMBINING MORE THAN 1 COLOR PER TUBE WILL BE ACCEPTED ON INITIAL ORDERS ONLY
- APPROXIMATE WEIGHTS PER TUBE OC 20#, IC 24#, H 30#, EC 26#
- SHIPPING CLASSIFICATION—13515 A-7 "ALUMINUM MOLDING IN STRAIGHT LENGTHS OF UNIFORM CROSS-SECTIONAL DIMENSION"

ORDER DIRECT FROM KELLER PRODUCTS — PLEASE SPECIFY:

SIZE $\frac{3}{8}$ ", $\frac{1}{2}$ ", or $\frac{5}{8}$ "
 SHAPE OUTSIDE CORNER (OC); INSIDE CORNER (IC); ETC.
 LENGTH 8' or 10'
 PATTERN SNOWDRIFT; WOODMERE WALNUT; FAWN; ETC.
 QUANTITY 10 PCS (OC); 20 PCS (IC); ETC.

KELLER PRODUCTS

41 Union Street Manchester, New Hampshire
Area Code 603—627-7887

SGP 0025712

F. Prefabricated
Wallboard

SGP 0025705