

San Mateo Times
May 10, 1963
page 10A

Dutch Boy. FRESH-AS-PAINT SPECIAL

Buy a gallon of wall
paint... get a color-
matched quart of trim

FREE!



Nothing can change a room faster than color! And colorful "Dutch Boy" Nalplex and Satin-Eggshell are the smartest, easiest team to do the job. Nalplex is a scrubbable latex wall paint that covers in one coat, won't show brush marks, dries fast to a flat finish. Brushes and rollers clean up in soap and water.

Satin Eggshell is a durable semi-gloss enamel that dries quickly to a soft rich lustre that defies moisture, scrubbing, and wear.

Lots of colors to choose from. Buy your wall paint now, and get your trim paint FREE!

ALSO SPECIALIZING IN

- Wallpaper
- Art Supplies
- Picture Framing

Village Paint

1940 RALSTON-LY 3-9679

Belmont

670-0000, 670-0001

preparation before placing them in concrete. Dig holes and pour a 3-inch layer of concrete. A 1:2:4 mix or buy a ready-mixed type. Place the post in the center of the hole so that it touches the poured base. Pour the remainder of the concrete around the post to grade level. Trowel smooth. Check alignment of the post with a level and stake it in place until the concrete dries.

The next step is to nail down a 1 by 6 top rail and a continuous 1 by 4 bottom rail. Use 2 1/2 inch common nails. Cover four posts at a time, butting the rails at the mid-point of the run. Place the bottom rail 6 inches above grade. Test if you don't want the dog crawling through.

Now cut eight 1 by 4 slats for each space between the posts. Saw the tops at an angle to fit underneath the top rail. The length of your slats will depend on the fence height you choose and the distance from the bottom rail to grade level. For a 5-foot fence, the slats should be cut 4 feet 6


inches long. Square the flat side 1/2 inch apart. Space the rails on edge 4 feet three inches apart. Attach them with 2 1/2 inch finishing nails along the top rail and with 1 1/2 inch finishing nails on the bottom. Cut vertical nail heads bottom rails from 1 by 4 slats. Nail them in place.

Repeat the procedure for each fence as you need them. You turn a corner, substitute a 4 by 4 post for the 2 by 4 post. Make a diagonal cut on the top rails so they butt at a 45 degree angle and multiply both the bottom rails straight. Sand, especially any protruding edges and points of sharp corners.

You will of course want to use one of the weather-resistant woods, such as redwood. And if you want your fence to be especially distinctive, specify a clear grade.

REFINISH FURNITURE

THE EASY BIX WAY

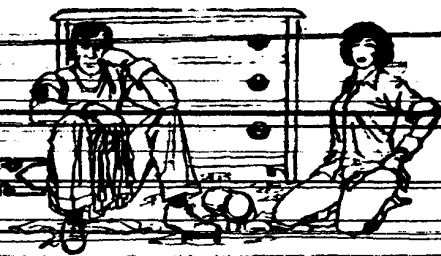

avoid this fix call BIX

FROM START... In our shop, we use exclusive chemicals to thoroughly remove all old finish from your furniture or woodwork. We then treat the wood with special Bix Process chemicals that open the pores of the wood making it possible for us to remove almost all stain, flaws and blemishes... thus restoring the wood to its natural condition. With this messy and hard first step completed, you are ready to do your refinishing.

... TO FINISH ...

Over the years Bix Researchers have worked with almost every type of stain and finish imaginable. With this experience as a guide, they have developed the products listed below and believe them to be the finest of their kind available!

BIX/IT STAINS & FINISHES

The new wipe-on stain and satin or lustre clear wipe-on finish for all refinishing needs. Its beauty is the ease of application and the beautiful, rugged finish.



BIX/IT ANTIQUING KIT

Here's a kit that gives you everything you need to antique, with easy to follow directions. Even a beginner will find it easy to use the wide range of color combinations.



BIX service company

furniture stripping service

1308 OLD COUNTY RD., BELMONT

593-3020