




D. J. Murray Manufacturing Co.

Wausau, Wisconsin


Offices in Principal Cities

MANUFACTURERS OF GRID UNIT HEATERS
AND GRID BLAST COILS

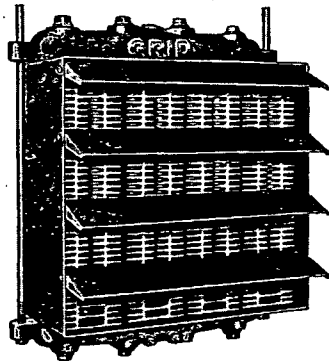

One piece construction "fin" heating sections of high test cast iron—no soldered, brazed, welded or expanded connections. Patented.

Designed and tested to operate with steam or hot water systems—for steam pressures from 2 lbs to 250 lbs. Engineered along the same lines as the standard GRID Unit which had aluminum heating sections and has been on the market since 1929.

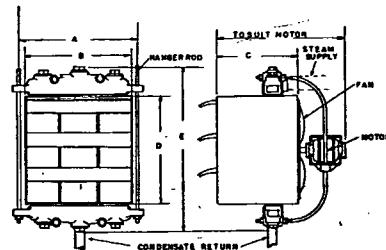

Overall dimensions for installation of Cast Iron GRID Unit Heater

CI (CAST IRON) SERIES GRID UNIT HEATER DATA

Model No.	Dimensions					Motor		Vol. Fan CFM	Capacities 5 PSI Steam 60°F Air		Pipe Size		Support Rod Dia.	Approx. Ship. Weight Lbs.
	A	B	C	D	E	HP	RPM		Btu/Hr	Final Temp. °F	Supply	Return		
CI-1000	11½	13½	12½	9½	15½	1/25	1550	572	29,080	106	1½	1½	¾	150
CI-1200	14½	16½	12½	12½	18½	1/12	1550	795	46,450	112	1½	1½	¾	210
CI-1500	17½	19½	11½	16	21½	1/8	1750	1500	76,500	107	1½	1½	¾	280
CI-1820	17½	19½	11½	21	25½	1/8	1750	1700	101,500	114	1½	1½	¾	390
CI-2000	22½	20½	11½	21½	28½	1/6	1150	2600	148,000	110	2	1½	¾	490
CI-2025	22½	20½	11½	25½	35½	1/6	1150	2575	173,640	115	2	1½	¾	520
CI-2500	27½	25½	13	25½	35½	1/2	1150	4350	224,000	107	2	1½	¾	700
CI-3504	27½	25½	13	25½	35½	1/4	1150	3300	206,000	117	2	1½	¾	660
CI-2530	27½	25½	13	31	40½	1/2	1150	4650	275,800	114	2	1½	¾	900
CI-3000	32½	31	13	31	40½	1/2	850	6300	332,000	108	2½	1½	¾	1020
CI-3500	32½	31	13	31	40½	1½	1150	8000	380,000	103	2½	1½	¾	1070

NO ELECTROLYSIS TO CAUSE CORROSION

Low maintenance expense.
More air changes per hour.
Positive "directed" heat.
No leaks—no breakdowns.

Lower outlet temperature.
Larger air volume.
No soldered, brazed or expanded joints.
Open design that keeps units clean.

Send for complete catalog information
Send for information on Blast coils and radiation.



Refrigeration Economics Co., Inc.

1231 Tuscarawas St. E., Canton 2, Ohio

RECOY PRODUCTS

FREEZE PROOF WATER COOLERS

PATENTED
BULLETIN O-52

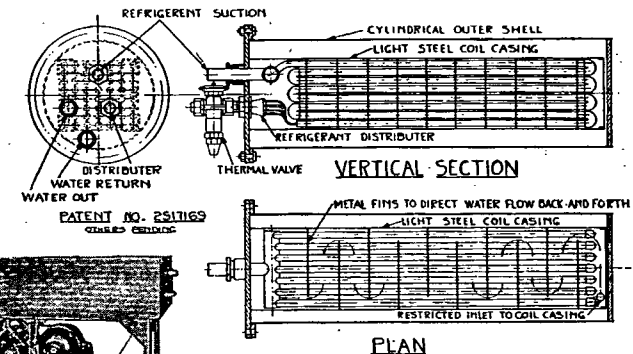


FREEZE PROOF—Freezing does not damage as water is outside the cooling coil and freezing only distorts the light sheet metal coil casing. No damage results unless the freezing extends to outer shell and even then water does not get into the refrigerant

NO OIL LOGGING—Oil returns with refrigerant.

MINIMUM FREON CHARGE—5 to 8 lbs per ton.

CLEANABLE COOLER—Cooling coils are removable for cleaning or repair.

CAPACITIES—Supplied in sizes from 2 to 100 tons, as coolers only with thermal valves, coolers with insulation and steel lagging, or complete assembly including condensing unit and all controls.



C. F. Coils



Air Conditioning

C. F. COILS—Continuous fin coils for air conditioning, heating, and cooling.

AIR CONDITIONING—Air conditioning units of ceiling or floor type in all capacities, for cooling, heating, or both.