ST0461076

PLAINTIFF'S EXHIBIT

DOW-2085

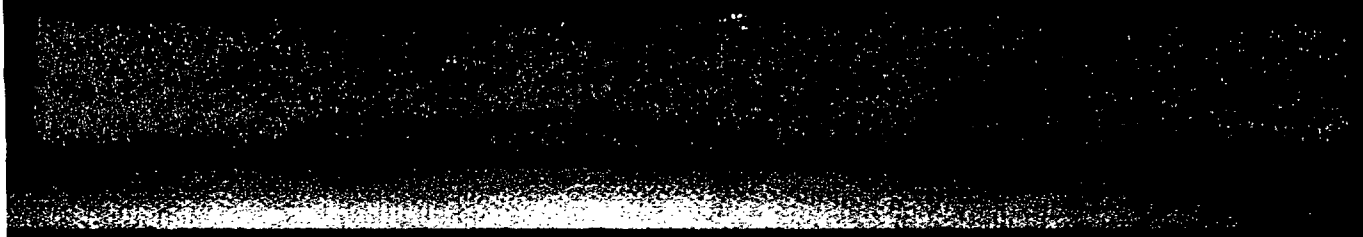

NEW OIL-RESISTANT STYLE 3300 NEOPRENE COMPRESSED NON-ASBESTOS GASKETING WITHSTANDS FREON* FLUIDS, RESISTS OZONE

The fourth in a planned series of compressed non-asbestos innovations from GARLOCK.

GARLOCK developed Style 3300 compressed non-asbestos gasketing with a neoprene binder for applications where resistance to oil is just as important as sealability. Because of this distinctive binder, Style 3300 is particularly useful for severe service in refineries and petrochemical applications. And, since it has the ability to withstand various FREON fluids, Style 3300 is also ideal for use in refrigeration equipment. Plus, good ozone resistance adds considerably to its shelf life.

New from GARLOCK laboratories, Style 3300 compressed non-asbestos gasketing combines a unique blend of synthetic fibers with a neoprene binder. This combination results in superior *SEALABILITY*, excellent *CREEP RELAXATION* and *COMPRESSIBILITY*, plus improved *RECOVERY*. The neoprene binder, in particular, gives the gasketing its high resistance to oils. All these features provide Style 3300 with the strength it needs for **more severe service conditions** and the cost-saving benefits of longer life, dependability and reduced maintenance.

With a temperature range up to +371°C (+700°F), Style 3300 is ideal for the high-heat conditions of refineries. It has a maximum pressure and temperature factor of 750,000 at +371°C (+700°F) and operates effectively in the pH range of 1 to 11. Other physical and chemical data are shown on the charts on the reverse side of this bulletin.

Style 3300 is available in popular sizes and thicknesses. Sheet sizes are 60" x 60", 60" x 120" and 60" x 180". Six thicknesses are 1/64", 1/32", 3/64", 1/16", 3/32" and 1/8".

*Registered U.S. Trademark

GARLOCK. SEALS OF APPROVAL.

Oil resistant Style 3300 neoprene compressed non-asbestos gasketing

GARLOCK Style 3300 gasketing was developed to work in the severe operating conditions of refineries, other petroleum related applications, plus refrigeration equipment and air conditioning. Binding the synthetic fibers with neoprene makes the material resistant to oil absorption and fluid loss. More data on physical and chemical properties are shown in the charts below.

GENERAL CHEMICAL RESISTANCE OF GARLOCK STYLE 3300 NEOPRENE GASKETING

MATERIAL	RATING

These ratings should be used only as a guide for your consideration, investigation and verification and should not be taken as a warranty or representation for which we assume legal responsibility. No permission is granted to practice any patented invention without a license.

Style 3300 gasketing is one of a family of new compressed non-asbestos sheet material offered by GARLOCK. If Style 3300 does not meet your requirements, check your GARLOCK distributor or field sales representative for the physical properties and fluid resistance of Styles 3000, 3100, 3200 and 3400. These additional styles cover a wide media range.

COMPARE GARLOCK STYLE 3300 GASKETING WITH COMPRESSED ASBESTOS GASKETING

ASTM TEST METHOD	PHYSICAL PROPERTY	TYPICAL DATA