1818 **PASTEL**
TINT BASE

Glidden

Endurance Mildew & Fume Resistant Non-Chalking

HOUSE PAINT

FOR SIDING, TRIM, SHUTTERS AND TINTING

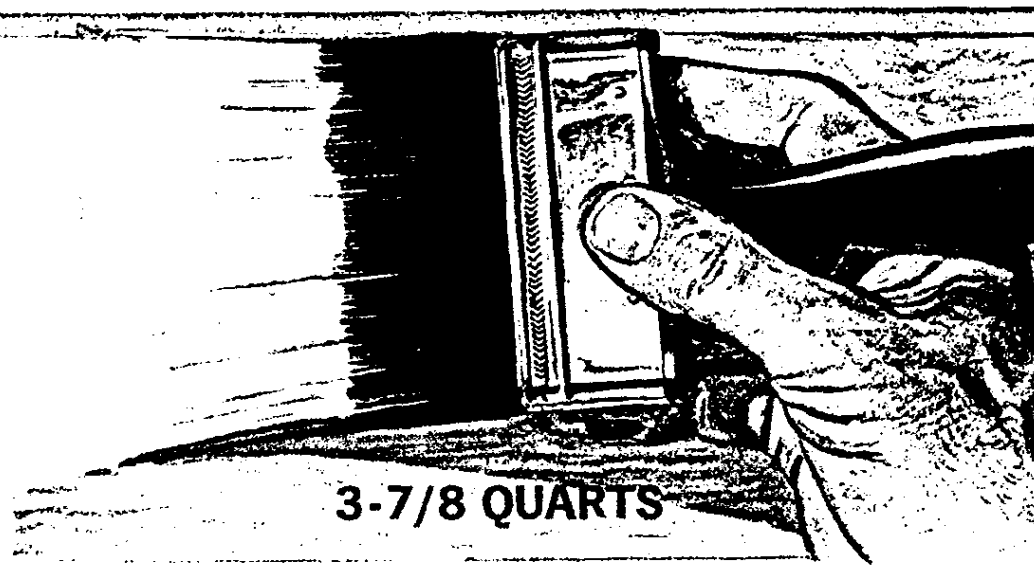

3-7/8 QUARTS

CAUTION! COMBUSTIBLE

Keep away from heat and open flame. Avoid prolonged contact with skin and breathing of vapor or spray mist. Do not take internally. Close container after each use.

Use With Adequate Ventilation.

KEEP OUT OF THE REACH OF CHILDREN

11-62

Made in U.S.A.

GLD018286

1856-807 F-20-18P 5-68-C

GH-1

ENDURANCE PASTEL TINT BASE HOUSE PAINT — 1818
MILDEW-RESISTANT AND NON-CHALKING
FOR SIDING, TRIM, SHUTTERS AND TINTING

This all-purpose white is formulated to be used wherever mildew-resistant and non-chalking characteristics are desired. Tint with DRAMATONE MULTI-PURPOSE TINTING COLORS to produce light tints, according to color formulas. Especially recommended for finishing those areas adjacent to masonry or dark painted areas, as it eliminates unsightly streaks caused by the weathering away of conventional type paints. The unusual elasticity of this house paint makes it ideal for all exterior painting on wood and metal.

DIRECTIONS

SURFACE PREPARATION: New wood must be cured, dry and clean. Prime all knots with shellac reduced one to one with denatured alcohol. Prime with GLIDDEN 1851 EXTERIOR BASECOAT as directed for usage. Putty all cracks, nail holes and open joints. Caulk casings and chimneys where necessary.

FINISH COATS: After this product has been tinted to match color formulas, apply one or two coats without thinning, allowing 48 hours drying time between coats.

PREVIOUSLY PAINTED WOOD surfaces in good repaint condition need only be clean. Painted surfaces that are badly worn, heavily chalked, cracked, blistered, flaking or peeling should be wire brushed, scraped or burned off to the bare wood. Prime these areas with GLIDDEN 1851 EXTERIOR BASECOAT.

FINISH COATS: Follow directions for new wood.

MATERIAL PREPARATION: Mix thoroughly before using by stirring with a lifting motion or by boxing (pouring from one container to another several times). This tinted product should be applied without thinning, although thinning with one-half pint of turpentine or mineral spirits per gallon is permissible when using over extremely hot or very cool surfaces. May be tinted with GLIDDEN DRAMATONE MULTI-PURPOSE TINTING COLORS or good grade COLORS-IN-OIL. See colors and tinting formulas at your GLIDDEN Dealer's. Always box after tinting or thinning. Do not add driers.

MATERIAL APPLICATION: Paint only when weather conditions are favorable and temperature is above 50°F. Brush paint uniformly and evenly, working paint well into surface of one board at a time. After spreading, make light finishing strokes. For best performance, do not cover more than 550 square feet of surface with each gallon of paint. To spray, reduce 10%-15% with turpentine or mineral spirits and use 30 to 40 pounds air pressure. L. C. 465

CONTENTS:

0.97 GAL.
3.67 litres
124 fl. oz.

NOTE: This container holds 4 oz. **LESS** than a full gallon to allow addition of colorant as desired.

This paint is resistant to the deteriorating action of molds (mildew) and bacteria and to disfigurement of the surface by molds. No claim is made for preservative action to other than the paint film.

Active Ingredient:

Barium Metaborate		33.9%
Inert Ingredient		97.9%
		100.0%
Pigment	36.8%	
Vehicle	63.2%	
	100.0%	
Pigments		
Titanium Dioxide	50.0%	
Barium Metaborate	41.7	
Silica & Silicates	8.3	
	100.0%	
Vehicles		
Linoleic, Oleic, Linolenic, Palmitic, Stearic Alkyd Resin	58.5%	
Mineral Spirits & Driers	41.5	
	100.0%	

1818 766

SCM GLIDDEN COATINGS & RESINS • Cleveland, Ohio 44115
SCM CORPORATION

GLD018287