

WESTINGHOUSE CATALOG

SPRING

1941

**Westinghouse
Electric Supply Co.**

OKLAHOMA CITY, OKLA.
850 N. W. Second Street
Tel: 2-7101

Copyright 1941 by Westinghouse Electric Supply Co.



**Westinghouse
Electric Supply Co.**

TULSA, OKLAHOMA
307-309 Brady Street
Tel: 3-7155



Insulation 600 Volt Building Wires

Type "R" and Type "RL" — Standard Diameter — 36 Gs — 120 F.
Manufactured in Accordance with Federal Specifications JC101B of Jan. 30, 1940

Type "R" Code Definition: 600 Volt, Rubber Covered and Braided Building Wire, consisting of inner copper conductors, rubber compound insulation which is better than ordinary compounds, and outer cotton braid, flame resisting, smoothly finished to make them fish more easily.

The rubber and braid are hermetically sealed against deteriorating effect of light, heat, air and moisture.

Type "RL" Rubber and Lead Covered Wires are constructed the same as Type "R" except they have the outer lead sheath.

THIS PAGE PRICED IN ACCORDANCE WITH ZONE D SCHEDULE

TYPE "RL" LEAD ENCASED CABLE (Rubber and Lead Covered) SINGLE CONDUCTOR—SOLID

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
14	185	\$ 6.85	\$ 68.50 M	\$ 68.50 M
12	158	7.95	61.50 M	61.50 M
10	280	10.72	82.34 M	82.34 M
8	320	14.40	128.00 M	128.00 M

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
6	520	\$22.76	\$1138.00 M	\$1138.00 M
4	620	26.90	1345.00 M	1345.00 M
2	770	32.70	1635.00 M	1635.00 M
1	980	38.80	1940.00 M	1940.00 M

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
18	145	\$ 7.24	\$ 62.00 M	\$ 62.00 M
14	225	9.90	82.50 M	82.50 M
12	320	14.82	128.00 M	128.00 M
10	410	17.00	152.00 M	152.00 M
8	540	24.82	214.00 M	214.00 M

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
6	552	\$20.12	\$1006.00 M	\$1006.00 M
4	1045	48.32	2416.00 M	2416.00 M
2	1310	61.85	3092.50 M	3092.50 M
1	1310	63.82	3190.00 M	3190.00 M

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
14	500	\$24.42	\$1221.00 M	\$1221.00 M
12	680	28.14	1407.00 M	1407.00 M
10	770	32.90	1645.00 M	1645.00 M
8	960	42.44	2122.00 M	2122.00 M

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
6	1470	\$61.68	\$3084.00 M	\$3084.00 M
4	1780	73.70	3685.00 M	3685.00 M
2	2240	102.04	5102.00 M	5102.00 M
1	2900	137.44	6872.00 M	6872.00 M
1-0	3140	155.38	7729.00 M	7729.00 M
2-0	3820	177.80	8891.00 M	8891.00 M
3-0	4570	206.78	10340.00 M	10340.00 M
4-0	5480	247.16	12358.00 M	12358.00 M

TYPE "R" RUBBER COVERED FIXTURE WIRE— SOLID CONDUCTOR

Solid copper conductor. Code rubber insulation. Smoothly finished saturated cotton outer braid.

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
18-1/2	1.90	\$ 9.36 M	\$ 9.36 M	\$ 9.36 M
18-1/4	1.18	10.25 M	10.25 M	10.25 M
18-1/8	1.14	9.90 M	9.90 M	9.90 M
18-1/16	1.34	11.78 M	11.78 M	11.78 M

ADDITIONAL DISCOUNT

An additional discount will be allowed from the 1000 ft. quantity prices on Type R and Type RL Building Wires.

Purchase of \$ 50.00 net value.....	Discount 2 1/2%
\$ 100.00 net value.....	5%

ASSORTING PRIVILEGE

Sizes and colors may be assorted in full coils or reels.

REELS

Reels shall be paid for (not, no cash discount) at the same time as the material, and may be returned direct to manufacturer freight collect, mailing copy of freight bill to us. If reels are returned to our warehouse, transportation must be prepaid by customer. When reels are returned in good condition not later than 15 months from date of shipment, full credit will be allowed.

"ROCKWELL" ARBESTOS- VARNISHED CAMBRIC WIRE (Type "A. V. C.")

For special wiring on general conduit work in boiler rooms, or where the wiring may be subjected to heat, oil, grease, corrosive fumes or fire hazard. The unusual moisture resisting qualities.

Solid Single Conductor—600 Volt (Type "R")

Colors: Black or White.
Construction: Solid plain copper conductor. Two layers of Varnished Cambric. Filled with Arbestos. Saturated asbestos braid.

No.	100 Ft.	500 Ft. @	1000 Ft.
14	\$7.70	\$385.00 M	\$385.00 M
12	8.54	427.00 M	427.00 M
10	10.28	514.00 M	514.00 M

TYPE "RD" DUPLEX SOLID RUBBER COVERED

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
14	62	\$ 4.32	\$ 216.00 M	\$ 216.00 M
12	82	5.84	292.00 M	292.00 M

NEON SIGN AND OIL BURNER CABLES

For use with luminous tube (neon) signs and oil burner ignition systems.

No.	Volts	Finish	O.D.	100 Ft.	500 Ft. @
14	5,000	Lacquer	240"	\$7.25	\$362.50 M
14	10,000	Lacquer	300"	8.36	418.00 M
14	15,000	W. P.	465"	9.24	462.00 M
14	15,000	Lacquer	400"	9.30	465.00 M

TYPE "R" No. 14 AND No. 12 SOLID R. C. SINGLE BRAID

Packed: 500 ft. in a carton.
Colors: Black, White, Red, Green, Yellow, Brown, Orange or Blue.
(Please specify Color when ordering.)

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
14	26	\$ 1.54	\$ 77.00 M	\$ 77.00 M
12	36	2.00	100.00 M	100.00 M

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
10	49	\$ 2.55	\$ 127.50 M	\$ 127.50 M
8	80	5.14	257.00 M	257.00 M

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
14	26	\$ 2.00	\$ 100.00 M	\$ 100.00 M
12	36	2.50	125.00 M	125.00 M
10	49	3.72	183.50 M	183.50 M
8	80	5.74	287.00 M	287.00 M

*No. 14 can be furnished in Black, White or Red; other sizes in Black only.

STRANDED R. C. SINGLE BRAID

Colors: Black or White

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
14	26	\$ 2.04	\$ 102.00 M	\$ 102.00 M
12	36	2.74	137.00 M	137.00 M
10	49	3.90	191.00 M	191.00 M
8	80	5.84	292.00 M	292.00 M

*No. 12 can be furnished in Black, White, Red, Blue or Green, other sizes in Black or White only.

STRANDED R. C. DOUBLE BRAID

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
14	30	\$ 2.54	\$ 127.00 M	\$ 127.00 M
12	40	3.22	161.00 M	161.00 M
10	56	4.22	211.00 M	211.00 M
8	90	6.44	322.00 M	322.00 M

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
6	126	\$ 8.38	\$ 419.00 M	\$ 419.00 M
4	190	10.94	547.00 M	547.00 M

Colors: Black, White or Red

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
2	278	\$13.90	\$695.00 M	\$695.00 M
2	278	15.94	797.00 M	797.00 M
2	364	22.56	1128.00 M	1128.00 M
2	443	27.12	1356.00 M	1356.00 M

Colors: Black or White

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
2	540	\$22.70	\$1135.00 M	\$1135.00 M
2	682	30.12	1506.00 M	1506.00 M
2	819	46.36	2318.00 M	2318.00 M

Colors: Black only

No.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
2	540	\$22.70	\$1135.00 M	\$1135.00 M
2	682	30.12	1506.00 M	1506.00 M
2	819	46.36	2318.00 M	2318.00 M

CIRCULAR MILL SIZES STRANDED R. C. DOUBLE BRAID

Cir. Mil.	Lbs. Per 1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
250,000	962	\$57.74	\$2887.00 M	\$2887.00 M
300,000	1139	65.20	3260.00 M	3260.00 M
350,000	1300	73.90	3695.00 M	3695.00 M
400,000	1473	82.58	4129.00 M	4129.00 M
500,000	1815	102.04	5102.00 M	5102.00 M
600,000	2177	120.16	6008.00 M	6008.00 M
700,000	2512	144.14	7207.00 M	7207.00 M
750,000	2673	154.00	7700.00 M	7700.00 M
900,000	3194	179.65	8982.50 M	8982.50 M
1,000,000	3580	200.78	10039.00 M	10039.00 M

Special Insulation Rubber Covered Wires

Types "RHT", Type "RH", Type "RW", Type "RP"
THIS PAGE PRICED IN ACCORDANCE WITH SONS D SCHEDULE

TYPE "RHT"—80° C.—140° F. SMALL DIAMETER RUBBER COVERED BUILDING WIRE

For New Work or Rewiring Existing Raceways for Greater Amperage

Heat-Resistant Grade Rubber Insulation.
Moisture-Resistant, Flame-Retarding Braid.
NOTE: Permission must be obtained from local inspectors before using this wire.

No.	1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
Solid Conductor—Single Braid				
14	21	\$ 2.75	\$24.34 M	\$23.04 M
12	25	\$ 3.00	\$25.12 M	\$21.22 M
10	30	\$ 3.14	\$25.25 M	\$21.45 M
8	35	\$ 3.20	\$25.28 M	\$21.30 M
Solid Conductor—Double Braid				
14	24	\$ 3.25	\$25.94 M	\$23.34 M
12	31	\$ 3.50	\$26.80 M	\$21.90 M
10	35	\$ 3.65	\$27.15 M	\$22.75 M
8	40	\$ 3.70	\$27.20 M	\$22.70 M
Stranded Conductor—Single Braid				
14	22	\$ 3.25	\$25.94 M	\$23.34 M
12	29	\$ 3.50	\$26.80 M	\$21.90 M
10	35	\$ 3.65	\$27.15 M	\$22.75 M
8	40	\$ 3.70	\$27.20 M	\$22.70 M
Stranded Conductor—Double Braid				
14	25	\$ 4.15	\$28.82 M	\$24.82 M
12	33	\$ 4.15	\$28.82 M	\$24.82 M
10	47	\$ 4.64	\$27.75 M	\$24.75 M
8	50	\$ 4.60	\$27.60 M	\$24.60 M

2% CASH DISCOUNT—3%

TYPE "RH"—60° C.—140° F. SYNTHETIC INSULATED SMALL DIAMETER BUILDING WIRE

For Rewiring Existing Raceways
The synthetic compound insulation of Type "RH" small diameter wire is moisture-resistant and flame-retarding.
Has no outer covering.

No.	1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
Solid Conductor				
14	20	\$10.35	\$23.30 M	\$27.30 M
12	25	11.25	24.30 M	24.40 M
10	30	12.55	24.60 M	24.60 M
8	35	15.00	25.30 M	25.30 M
Stranded Conductor				
14	22	\$10.82	\$25.00 M	\$27.30 M
12	30	12.00	24.60 M	24.60 M
10	35	13.00	24.60 M	24.60 M
8	40	17.32	25.00 M	25.00 M
6	119	22.70	25.00 M	25.00 M
4	176	27.70	25.00 M	25.00 M
2	253	35.00	25.00 M	25.00 M

TYPE "RW"—75° C.—185° F. HEAT-RESISTING RUBBER COVERED BUILDING WIRE

For General Use
Conforming to all requirements of Federal Spec. JC100A of Jan. 20, 1940.
Heat-Resistant Grade Rubber Insulation.
Moisture-Resistant, Flame-Retarding Braid.

No.	1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
Solid Conductor—Single Braid				
14	26	\$ 2.32	\$24.45 M	\$22.22 M
12	35	3.84	24.45 M	21.65 M
10	40	5.20	24.45 M	21.65 M
8	50	8.45	24.45 M	21.65 M
Stranded Conductor—Double Braid				
6	126	\$12.75	\$111.34 M	\$105.45 M
4	190	16.45	143.28 M	125.72 M
2	278	22.35	184.00 M	163.00 M
1	364	30.22	232.00 M	215.00 M
1-0	445	37.25	284.00 M	267.00 M
2-0	540	42.65	379.00 M	369.00 M
3-0	663	58.22	442.00 M	419.00 M
4-0	814	82.30	541.00 M	512.00 M

ADDITIONAL DISCOUNT

An additional discount will be allowed from the 1000 ft. quantity prices on the following types of Building Wires:

Type RHT	Type RH	Type RW
Purchases of \$ 50.00 not value	Discount 2 1/2%	
\$25.00 not value	5%	

ASSORTING PRIVILEGE

Size and colors may be assorted in full coils or reels.

TYPE "RW"—"MOISTURE-RESISTING" RUBBER COVERED BUILDING WIRE

For use in wet locations as defined in Section 3025 of Article 300 and Section 2304B of Article 230 of the National Electrical Code.

Moisture-Resistant Rubber Insulation.
Flame-Retarding, Moisture-Resistant Braid.

No.	1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
Solid Conductor—Single Braid				
14	25	\$ 4.34	\$42.12 M	\$39.36 M
12	35	5.00	49.52 M	46.50 M
10	40	7.12	61.92 M	58.65 M
8	50	11.22	82.40 M	78.34 M
Stranded Conductor—Double Braid				
6	126	\$18.25	\$168.45 M	\$159.00 M
4	190	25.45	221.40 M	210.00 M
2	278	36.04	298.40 M	282.00 M
1	364	50.42	315.00 M	298.00 M
1-0	445	64.30	385.20 M	365.00 M
2-0	540	81.12	444.00 M	421.00 M
3-0	663	105.00	515.00 M	491.00 M
4-0	814	150.00	684.00 M	672.00 M

TYPE "RP"—60° C.—140° F. PERFORMANCE GRADE RUBBER COVERED BUILDING WIRE (Formerly Known as 30°)

For General Use
Performance grade, Moisture-Resistant Rubber Insulation, Flame-Retarding Braid, Type "R" Code Grade Wire.

Moisture-Resistant, Flame-Retarding, Fibrous covering.

No.	1000 Ft.	100 Ft.	500 Ft. @	1000 Ft.
Solid Conductor—Single Braid				
14	26	\$ 2.35	\$24.70 M	\$22.52 M
12	35	3.22	28.00 M	26.04 M
10	40	4.40	35.34 M	33.30 M
8	50	7.24	62.00 M	59.76 M
Stranded Conductor—Double Braid				
6	126	\$11.12	\$98.00 M	\$91.62 M
4	190	14.34	124.74 M	114.20 M
2	278	19.00	169.00 M	155.00 M
1	364	27.52	239.40 M	220.00 M
1-0	445	34.16	297.00 M	278.00 M
2-0	540	39.76	345.00 M	327.00 M
3-0	663	48.36	403.00 M	381.00 M
4-0	814	64.22	495.00 M	469.00 M

"ROCKBESTOS"—ASBESTOS COVERED RANGE OR REHOBOTAT WIRE Solid Conductor—300 Volts Table "AC"

Solid conductor wire with genuine asbestos covering, used for wiring electric ranges, etc.

No.	Pt.	Per 100 Ft.
10	\$0.97	\$ 9.70
14	.85	8.50
12	.80	8.00
10	.75	7.50
8	.70	7.00

THERMOSTAT CABLE

Extensively used for automatic fuel burner control, signal and intercommunicating systems.
Armored Thermostat Cable
Table "TC"

No.	100 Ft.	250 Ft. @	500 Ft. @
10-3	\$ 5.54	\$25.34 M	\$45.76 M
10-4	5.80	29.00 M	73.22 M

Unarmored Thermostat Cable
No. 18 solid copper conductors with 2 paraffin windings, twisted and paraffined cotton dampproof braid overall.

No.	100 Ft.	500 Ft.	1000 Ft. @
10-3	\$ 11.50	\$13.64 M	\$13.00 M
10-4	2.14	19.36 M	18.44 M
10-4	2.76	25.00 M	23.40 M

ANNUNCIATOR WIRE



No.	100 Ft.	250 Ft. @	500 Ft. @
10-3	\$ 11.50	\$13.64 M	\$13.00 M
10-4	2.14	19.36 M	18.44 M
10-4	2.76	25.00 M	23.40 M

FLEXIBLE MOTOR LEAD WIRE Single Braid

Tinned copper with cotton separator, N. E. C. Standard rubber wall, weatherproof finish.

No.	100 Ft.	500 Ft. @
12 3/64"	\$6.04	\$3.00 C \$27.64 M
10 3/64"	105/630	3.94 C 35.89 M

TWISTED TELEPHONE WIRE (SOLID)

Weatherproof or Oak Tan Dry Braid as listed
Two and three wire, 1/2 insulation.

No. Wires	Braid	100 Ft.	500 Ft.	1000 Ft.
10 2	Dry Int.	\$2.40	\$21.72 M	\$20.68 M
19 3	Dry Int.	3.53	\$32.58 M	31.00 M
19 2	W. P.	2.32	21.00 M	20.00 M
19 3	W. P.	3.43	31.60 M	30.10 M

SOFT DRAWN BARE COPPER WIRE

GENERAL CABLE

Weight	Less than 10 to 25	25	200
Per 1000 Ft.	10 Lbs. 24 Lbs.	100 Lbs.	1000 Lbs.
Size 1000 Ft.	Per Cwt.	Per Cwt.	Per Cwt.
6 50 lbs.	\$46.74	\$50.74	\$46.74
8 80 lbs.	56.84	50.54	46.54
4 127 lbs.	56.34	50.34	46.34

CASH DISCOUNT 1/4 OF 1%

Rubber Covered Cords and Cables

PARALLEL LAMP CORD

With two 1/2" brass and yellow and olive green
On 250 Ft. Metal Spool

No.	100 Ft.	250 Ft.	1000 Ft.
12	\$2.34 C	\$5.85 M	\$18.45
14	2.80 C	7.00 M	21.30
16	4.00 C	10.00 M	30.00

SILK PARALLEL LAMP CORD

WITH UNDERBraid
Has braid over all and braid over individual conductors

No.	100 Ft.	250 Ft.	1000 Ft.
12-1/2	\$2.15 C	\$5.39 M	\$16.74
14	2.50 C	6.25 M	18.75
16	3.50 C	8.75 M	26.25

Colors: Brown, Green, White, Black, Gold or Brush Brass. 500 Ft. on Spool.

FLAME PROOF KEROSENE CORD

Resistant to Type AF
Approved for use with large size lamps, as used in commercial or industrial lighting fixtures. Supplied in silk braid. Color Dark Brown.

No.	100 Ft.	500 Ft.	1000 Ft.
12-Silk	\$2.90	\$7.24 M	\$24.04
14-Silk	3.84	9.60 M	31.68

TYPE "C" SINGLE CONDUCTOR FLEXIBLE CORD

Flame resisting insulation, single braid. Constructed of strands of No. 30 wires. Choice of Black, White, Brown or Oak Tan, with or without tracer.

No.	100 Ft.	1000 Ft.	3000 Ft.
12	\$1.12	\$10.18	\$ 9.70 M
16	1.80	16.44	16.10 M

SILK AND COTTON COVERED SINGLE CONDUCTOR CORD TYPE "F"

Coil quantity not broken to assort colors.
Silk Covered Cord

No.	100 Ft.	500 Ft.	1000 Ft.
12-1/2	\$1.00 C	\$5.12 M	\$8.00 M
14	1.20 C	6.00 M	9.00 M

Colors: Brush Brass or Brown.
Cotton Covered Cord
Colors: Brush Brass, Brown and Brown with tracer.

TYPE "T" REINFORCED CORD

A very rugged substantial cord extensively used on Vacuum Cleaners and other portable devices


No.	100 Ft.	250 Ft.	1000 Ft.
12-1/2	Small \$2.90 C	\$7.24 M	\$24.04 M
14-1/2	Large 4.12 C	10.30 M	31.74 M

BELDEN UNDER-RUG WIRE (All Rubber Construction)

Lies flat under the rug and is so thin it is practically unnoticeable. Only 1/4" thick and 3/4" wide. Two conductors.

No.	Stranding	Per Ft.	100 Ft.
1724	16/000	7c	\$6.00

SUPER SERVICE TYPES ALL RUBBER CORD

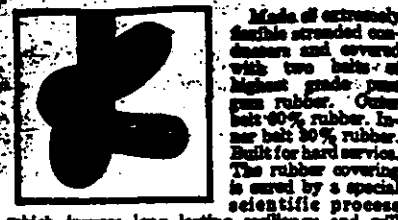

Made of extremely flexible stranded conductors and covered with two coats of highest grade pure gum rubber. Outer braid 60% rubber. Inner braid 10% rubber. Built for hard service. The rubber covering is cured by a special scientific process which insures long lasting resiliency and will resist acids, oils, water and severe abrasion.

No.	Cond.	O. D.	100 ft.	250 ft.	1000 ft.
12	2	.400	\$12.00	\$11.44 C	\$106.00
14	2	.421	16.30	14.32 C	136.00
16	2	.450	19.44	17.48 C	162.00
18	2	.471	15.72	14.30 C	132.00
20	2	.450	16.58	14.90 C	144.00
22	2	.482	22.74	21.52 C	198.00
24	2	.502	22.72	21.52 C	198.00
26	2	.525	26.00	24.48 C	232.00
28	2	.575	32.16	29.16 C	278.00
30	2	.525	30.00	27.30 C	252.00
32	2	.575	34.90	31.72 C	312.00
34	2	.750	40.00	37.18 C	342.00
36	2	.675	36.18	33.90 C	306.00
38	2	.800	42.22	38.48 C	362.00
40	2	.850	52.84	47.30 C	472.00
42	2	.950	75.00	68.90 C	614.00
44	2	.950	74.38	67.80 C	602.00
46	2	1.100	92.96	84.50 C	754.00

SUPER SERVICE JUNIOR ALL RUBBER CORD

The same construction as above except of smaller diameters

No.	Cond.	O. D.	100 ft.	250 ft.	1000 ft.
12	2	.300	\$ 8.96	\$ 8.96 C	\$74.40
14	2	.324	12.96	11.70 C	106.00
16	2	.354	16.96	9.96 C	91.20
18	2	.400	19.44	14.94 C	129.00

"DURACORD"

The heavy duty portable cord for use in chemical plants, steel mills, refineries, garages, battery plants, etc. Durable has a tough covering of thick heavy long-fiber cotton woven into a fire hose, oil resisting.

No.	Wires	O. D.	100 ft.	250 ft.	1000 ft.
12	2	.305	\$13.00	\$ 7.25 C	\$ 67.00
14	2	.330	16.00	10.00 C	94.00
16	2	.405	20.00	12.00 C	114.00
18	2	.405	20.00	11.00 C	104.00
20	2	.430	22.00	12.00 C	114.00
22	2	.530	28.00	15.00 C	172.00
24	2	.530	28.00	15.00 C	172.00
26	2	.605	34.00	22.10 C	204.00
28	2	.625	41.00	27.00 C	240.00

RUBBER SHEATHED CORD—SPECIAL

For the Shop or Commercial Use.

Similar in size and appearance to Super-Service Junior Cord. This is a competitive grade of All Rubber Covered Cord.

No.	Wires	O. D.	100 Ft.	250 Ft.	1000 Ft.
12	2	.31"	\$3.58	\$32.24 M	\$31.00
14	2	.34"	4.90	44.00 M	42.00
16	2	.35"	4.28	38.00 M	37.00
18	2	.35"	5.98	54.42 M	51.84

HOUSEHOLD ALL-RUBBER CORD TYPE SV

A sturdy all-rubber covered flexible cord for household service such as on washers, vacuum cleaners, polishers, etc. Made of 40% rubber which is scientifically cured by special process to insure flexibility and long service.

No.	Wires	Diam.	100 Ft.	250 Ft.	1000 Ft.
18	2	.240	\$3.72	\$32.75 M	\$30.00

MID-RIP PARALLEL ALL RUBBER CORD

This new all rubber parallel cord is "extra special flexible" conductors constructed of 41 strands of No. 34 wire, both embedded in a single strip of soft flexible para rubber.
Colors: Brown, Ivory, Green and Black.

No.	100 Ft.	250 Ft.	1000 Ft.	3000 Ft.
12-1/2	\$2.24	\$5.60 M	\$17.40 M	\$18.40 M
14-1/2	2.80	7.00 M	21.00 M	

HEATER CORD

Type HPD—3000 Cycle



Extra flexible. All sizes have strands constructed of No. 34 wires, insulated with pure asbestos yarn, covered with black and gray braid.

No.	Less than 250 Ft.	250 Ft.	1000 Ft.
12	\$1.00 C	\$2.00 C	\$26.00 M
14	4.00 C	3.50 C	34.10 M
16	5.00 C	4.50 C	43.20 M

HEATER CORD

Type HPD—10,000 Cycle

"Special extra flexible" with conductors constructed of strands of No. 36 wires. Insulated with pure asbestos yarn. Glass black and gray cotton braid with rayon marker.

No.	Stranding	100 Ft.	250 Ft.	1000 Ft.
12	65, No. 36	\$2.70	\$3.42 C	\$32.00 M
14	108, No. 36	4.90	4.52 C	43.00 M

THREE WIRE HEATER CORD

Type HPD

3000 Cycle—Gray Silk



For wiring combination pendant switch and convenience outlets on kitchen fixtures, etc.

No.	Wires	Per Ft.	100 Ft.	250 Ft.
18	3	\$9.97	\$5.44	\$49.30 C


"AMERICAN BEAUTY" HEATER CORD



The super-flexible Heater Cord, constructed of strands of No. 34 wires. Black and gold braid overall. Size No. 17.

No.	Per Ft.	100 Ft.	250 Ft.
100GB	\$9.97	\$4.45	\$38.96 M


PACKINGHOUSE CORD



Extremely rugged Saturated Weatherproof

No.	Less than 250 Ft.	250 Ft.	1000 Ft.
12	Coil \$4.00 C	\$41.00 M	\$39.50 M
14	5.84 C	\$1.30 M	48.00 M
16	7.90 C	71.20 M	67.80 M
18	12.90 C	118.00 M	112.40 M

BREWERY CORD TWISTED



New Code Twisted, Flexible

No.	100 Ft.	250 Ft.	1000 Ft.
12	\$2.82	\$25.40 M	\$24.20 M
14	3.84	\$2.20 M	30.70 M
16	5.34	48.50 M	46.00 M

Motor Repair and Insulating Material

WESTINGHOUSE INSULATED COTTON

No.	Thick- ness	Width	Per Roll	Per Roll
7588-1	.007"	1 1/4"	38.34	38.38
7588-1	.007"	1 1/2"	38	34
7588-1	.007"	1 3/4"	48	44
7588-1	.011"	1 1/4"	75	70
7588-1	.011"	1 1/2"	86	78

We can furnish all other patterns, thickness, etc., of tape and webbing.

INSULATED ASBESTOS TAPES

No.	Thick- ness	Width	Per Roll	Per Roll
1888	.010"	1 1/4"	7.00	38.38
1888	.015"	1 1/4"	10.00	4.38
1888	.025"	1 1/4"	15.00	4.88
1888	.025"	1 1/2"	20.00	4.38

GLASWEVE TAPE (25 Yd. Spool)

No.	Thick- ness	Width	Per Roll	Per Roll
7325-2	.007"	1 1/4"	32.84	32.88
7325-2	.007"	1 1/2"	2.84	2.88
7325-2	.010"	1 1/4"	2.88	2.88
7325-2	.010"	1 1/2"	2.78	2.78

WHITE COTTON SLEEVING (100 Yd. Spool)

No.	I. D.	Yds. Per Spool	Lb.	Per Spool
1879	.045	550	22.44	22.48
1879	.064	420	2.44	2.48
1879	.081	320	2.44	2.48
1879	.100	160	2.44	2.48

GLASWEVE SLEEVING (100 Yd. Spool)

No.	I. D.	Lbs. Per Spool	Per Spool
7842-1	1/4"	1.06	38.34
7842-1	1/2"	1.54	3.88
7842-1	3/4"	2.22	14.88
7842-1	1"	3.12	19.34



WESTINGHOUSE TREATED TAPES

Varnished Cambric (oiled linen) seamless bias cut, 36 yards per roll.
No. 1284—Tan
No. 1285—Black

Thick- ness	Per Roll	Thick- ness	Per Roll
.007"	38.34	.010"	31.38
.007"	38	.012"	38
.007"	34	.015"	34
.010"	38	.012"	1.38
.010"	38	.015"	1.14

VARNISH CAMBRIC CLOTH

Varnished Cambric (oiled linen) 25 and 50-yard rolls. 36" wide.


No.	Color	Cut	Thick- ness	Sq. Yd.	25 Yds.
1284	Tan	Bias Cut	.007"	1.88	38.38
1284	Tan	Bias Cut	.010"	1.88	38
1284	Black	Bias Cut	.007"	1.88	38
1284	Black	Bias Cut	.010"	1.88	38

BLACK HEAVY CANVAS, VARNISHED

No.	Thickness	Width	Sq. Yd.
1232	.080	36"	\$1.54

FISHPAPER (RAWHIDE FIBRE)

No.	A hard dense gray paper.	Thickness	Width	Lb.
1545		.010	40"	\$1.88



MAGNET WIRE

Accurately drawn to size.

Smooth, uniform insulation.

(10 lb. or 50 lb. Spools)

Single Cotton Enamel		Plain Enamel	
No.	Per Cwt.	No.	Per Cwt.
14	\$61.88	14	\$62.46
15	\$62.46	15	\$62.46
16	\$62.46	16	\$62.46
17	\$62.46	17	\$62.46
18	\$62.46	18	\$62.46
19	\$62.46	19	\$62.46
20	\$62.46	20	\$62.46
21	\$62.46	21	\$62.46
22	\$62.46	22	\$62.46
23	\$62.46	23	\$62.46
24	\$62.46	24	\$62.46
25	\$62.46	25	\$62.46

(4 lb. to 5 lb. Spools)

Single Cotton Enamel		Plain Enamel	
No.	Per Cwt.	No.	Per Cwt.
26	\$118.88	26	\$78.88
27	\$128.88	27	\$78.88
28	\$131.18	28	\$78.88
29	\$141.38	29	\$78.88
30	\$155.88	30	\$78.88
31	\$174.18	31	\$78.88

Please Note: We cannot accept orders for less than standard spools of magnet wire.

OHIO CARBON BRUSH ASSORTMENTS

FRACTIONAL H. P. KITS




Contains brushes for small horsepower motors, fan motors, vacuum cleaners, etc. Kits are divided into compartments.

as shown, separating each type.

No. 6 Kit—Contains 32 brushes and 18 springs.

Renewals for above, any size brush or spring.



This paste will flux all metals except aluminum. Non-corrosive, safe to use, and rapid to acid.


No.	Each	12 Cans @
2 oz. Cans	\$9.34	\$9.38
1 lb. Cans	\$1.54	\$1.58

COMMERCIAL OR

BURNLEY'S

SOLDERING PASTE

No.	Per Can	Per Can	Per Can
2 oz. Cans	\$9.16	\$9.16	\$9.16
4 oz. Cans	38	34	38
8 oz. Cans	38	38	38
16 oz. Cans	78	44	38
5 lb. Cans	2.88		

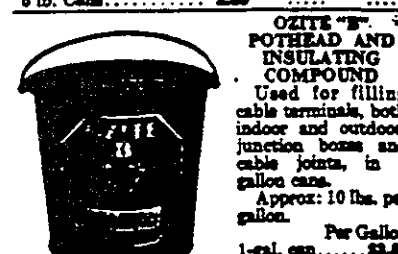

POTHEAD AND INSULATING COMPOUND

Used for filling cable terminals, both indoor and outdoor, junction boxes and cable joints, in 1 gallon cans.

Approx: 10 lbs. per gallon.

No.	Per Gallon
1-gal. can	\$3.88
5-gal. can	3.58

WESTINGHOUSE INSULATING VARNISHES AND PAINTS



The ingredients are carefully selected to obtain the best possible quality.

VARNISH (AIR DRYING)

No.	Drying Time	1 Qt.	1 Gal.
1123-2 (Spirit)	30 min.	Black \$1.38	\$4.18
3188	2-4 hr.	Black .38	2.42
7388	4-6 hr.	Black 1.18	2.44
1188 (Spirit)	30 min.	Clear 1.38	4.48
3388	4-6 hr.	Clear 1.94	3.38

VARNISH (BAKING)

No.	Drying Time	1 Qt.	1 Gal.
1781 (Best Grade)	8-10 hr.	Black \$8.88	\$2.64
2237	8-10 hr.	Black .34	2.88
2578	8-10 hr.	Clear .38	2.78
7338 (Synthetic)	8-12 hr.	Clear 1.54	6.38

THINNERS

No.	For Spirit Varnish	For Standard Clear and Black Oil Varnishes	For Lacquer	For Synthetic Varnish and Enamels	For Spirit Varnishes or No. 672 Enamel
1128					
1888					
2838					
3832					
5118					

ENAMELS

No.	Color	Drying Time	\$2.18	\$7.78	\$4.08
672	Red	2-3 hr.			
1737	Black	2-4 hr.	1.44	4.94	4.30
7348	Synthetic	Red	1-4 hr.	2.18	7.78

PAINT

PAINT				
2888 Gray	8-24 hr.	1.50	5.20	

CEMENTS

No.	Color	Application	For 10 lb. Cake	For 1 lb. Cake
618	Black	For sealing transformer bushings, etc.	\$1.76	
646	White	For repairing arc deflectors, porcelain, etc.		Quart 1.24


STRING SOLDER

Highest quality solid String Solder. All quantities packed on spools as follows:

No.	48-60 GRADE	Lb.
1 lb. Spool @		\$1.12
5 lb. Spool @		.94
25 lb. Spool @		.80
50 lb. Spool @		.74

50-50 GRADE

No.	50 lb. Spool @	\$0.85
-----	----------------	--------



ROBIN AND ACID CORE SOLDER

A string solder which has a solder flux in the core. Specify Acid or Rosin Core.

No.	1 lb. Spools	5 Lbs.	25 Lbs.
1			
1	\$1.14	\$1.08	\$1.02

RAR SOLDER, 50-50 GRADE

Guaranteed half and half grade. Approximate weight 1 1/4 lbs per bar.

No.	Per Lb.	10 Lbs.	50 Lbs.
1	\$8.88	\$8.84	\$8.80