MAKING INSTRUCTIONS: BATCH UNIT

V. 100 C.V. 207 D.V. (313) 322

CG 36 CODE RT-695-D PKG. _____

→ EST. WGT. OCT · 2 · 80 37302 1350 LBS.

STD. HRS. _____ TIME 11 PM

PROCESSES		APPROVED BY
( )	( )	
( )	( )	
( )	( )	
( )	( )	
TYPED BY		

N-740-C – Use Lot 102 or 103 only

NON-BLEEDING

QUIPMENT		NAME: "BON" RED DARK	USE LBS.	N CODE	ACCT. LBS.
Prep 1	1	If necessary, clean, dress sparkler & pre-coat with 15#		777-A	
	2	Obtain for S 6 Lot 102 or 103 only		740-C	
	3	Obtain for 32B		253 C	
313 2	4	Run 25" (370G) water into V-313			
	5	Weigh & pour in	200	7-D	98
	6	Turn on agitator & steam & dump in from S 2		740-C	502
		Lot 100% %			
		102 321 98.73	325		
		103 181 98.35	184		
	7	Dump in	23	113-B	23
	8	Dump in	5	777-A	5
	9	Heat to 212-214°F WATCH FOAM			
	10	Record: BY 7 (+), if necessary adj to + BY Assume 50%		7-D	
	11	Stir 30 min. at 212-214°F, then shut off steam WATCH FOAM			
	12	Circulate 15 min or longer thru Sparkler until sol'n is clear			
		Maintain at 190-195°F for S14 Record: HT 200 °F & Recorder 202 °F			
		Record: Start 515A Total Min 15 Clarity OK			
313 3 207	13	Run 1" (125G) water into V-313 207			
	14	When S-12 complete, pump V 313 thru Sparkler. Maintain V-313 at 190-195°F. Record: Start 530A Total Min 35 Sample-From Hose			
		Show to supervisor for OK			
	15	~~Weigh on Postal Scale & Add Lot~~	~~2~~	~~584-C~~	~~7~~
322 4	16	Run in 2" (66G) water into V-322			
	17	Weigh in plastic lined Drums & Pour in & hold for S 28			
		M 7 3162 #	634	28-D	202
313 5	18	When S14 complete, close V-313 outlet & stop pump			
	19	Run in 13" (192G) water & heat to 180-190°F			
		Circulate thru Syarkler until sol'n is clear.			
313 6 207	20	Pump V 313 thru Sparkler into V-322 207 (Sample)			
	21	When MTY-blow out Sparkler into V-322 207			
	22	RECORD: VOLUME 12 "			
	23	Heat to 165-170°F Take (1 qt sample)			
		Show 1 qt sample to shift supervisor for approval. (Example of acceptable clarification of N-740-C is available in office to compare to) Take sample with agitation			
	24	If S-23 if OK, continue with S-25. If S-23 is not acceptable, re-clarify thru sparkler.			

K 13829 REV.

EQUIPMENT		PAGE 2 CG 36 CODE RT-695-D EST. WGT. 1350 LBS.	USE LBS.	N CODE	ACCT. LBS.
207	25	Run 1" (69G) water into V-207			
7	26	~~If S-24 is OK, pump V-330 at 165-170°F into V-207~~			
	27	Heat V-207 to 165-170°F			
	28	Run in V-322, N-28-D, from S17 & rinse in	30		
	29	Adj to 33" (2277G) at 32-38°F	~~27~~x330	57-A	9900
322	30	Run in 22" (755G) water into V-322			
8	31	Weigh & Pour in M .4964%	481	7-D	239
	32	Dump in from S3 Lot		253 ~~2~~-C	~~[illegible]~~
		499	425		425
	33	Weigh on postal scale & add Lot 00316	9	180-C	9
	34	Heat to 70-90°F			
	35	Sift in in 1-2 min ✓	12	567-B	12
	36	Weigh on postal scale & stir to dissolve	4	479-D	4
100	37	Run in 14" (1391G) water into V-100			
9	38	Turn on agitator & steam and dump in	650	336-B	650
	39	Dump in	200	65-A	200
	40	Heat to 150-160°F & stir to dissolve N-336-B			
	41	Record: pH 6.0 (5.0-5.5)			
	42	If pH above 5.5, adj to pH 5.5 or lower Assume 78%	1	27-D	1
		Record: pH 4.9			
		NOTE: If pH below 5.0, do not adj upward			
	43	Hold for S 49			
302	44	Weigh and pour into V-302 for S 47 M 11 .3321 %	500	725-A	166
10					
322	45	Adj V-322 to 30" (1031) at 70-80°F + RECORD: TEMP 78°F			
11	46	Slurry with 30 Gal water in drum, pour in & stir 5 min ✓	73	39-A	73
207	47	Run in N-725-A from S44 AFAP into V-207			
12	48	Stir 30 min at 32-38°F maintaining + Cr, +KI		57-A	
		Record: Time Start 10:00 AM CR + KI + TEMP 32°F			
		NOTE:			
		(1) If CR-,KI-, add 20# "as is" increments Assume 32%		28-D	
		RECORD: CR (+), KI (+)			
		(2) If CR+,KI-,add 20# "as is" increments As sume 33%		725-A	
		RECORD: CR (+), KI (+)			
	49	Couple V-322 thru under surface distributor into V-207 in			
		40-45 min Record: Start 10:35 AM Total min 40			
	50	When S 49 complete, stir 15 min			
		Record: DIAZO — (-); BASE + (+); pH 11.7 (11.0-11.8) TEMP 62°F			
		NOTE: (1) If pH is 5.0-7.0, weigh & dump in 15# "as is" N-7-D AFAP		7-D	
		Assume 50% Record: pH			
	51	~~If necessary, adj to pH 11.4-11.8~~ Assume 50%		7-D	
		~~Record: pH~~ Assume 32%	72	28-D	23
	52	Adj to pH ~~[illegible]~~ 8.4-8.8 Assume 32%		28-D	
		Record: pH 8.6 → TAKE 1GAL SAMPLE Assume 50%	4	7-D	2
		NOTE: Add N-7-D in 20# "as is" increments to approach pH 9.0-9.5 Then use less N-28-D			
		Use only diluted N7 & N28 for pH adjustment			

DUP050107325

EQUIPMENT		PAGE 3 CG 36 CODE RT-695-D EST. WGT. 1350 LBS.	USE LBS.	N CODE	ACCT. LBS.
100	53	During S 49, heat to 210-212°F & shut off steam			
12		NOTE: If necessary, reheat V-100 to 210, 212°F			
		Prior to start of strike			
	54	Pump V-207 into V-100 in 60-65 min. Let V-100 temp drop to			
		200-205°F, then maintain at 200-205°F for balance of strike			
		Record: Start 12:50PM Total min 75			
	55	When strike complete heat to 210-212°F			
	56	Stir 15 min at 210-212°F			
	57	Flood to 87" (8648G). Record: pH 7.0 (6.5-7.2)			
	58	Stop agitator			
		SAMPLE			
		Start Fin Optr			
		300 A 700 A 209			
		7:00PM 2:45PM 32.0			

K 13830 REV.

DUP050107326

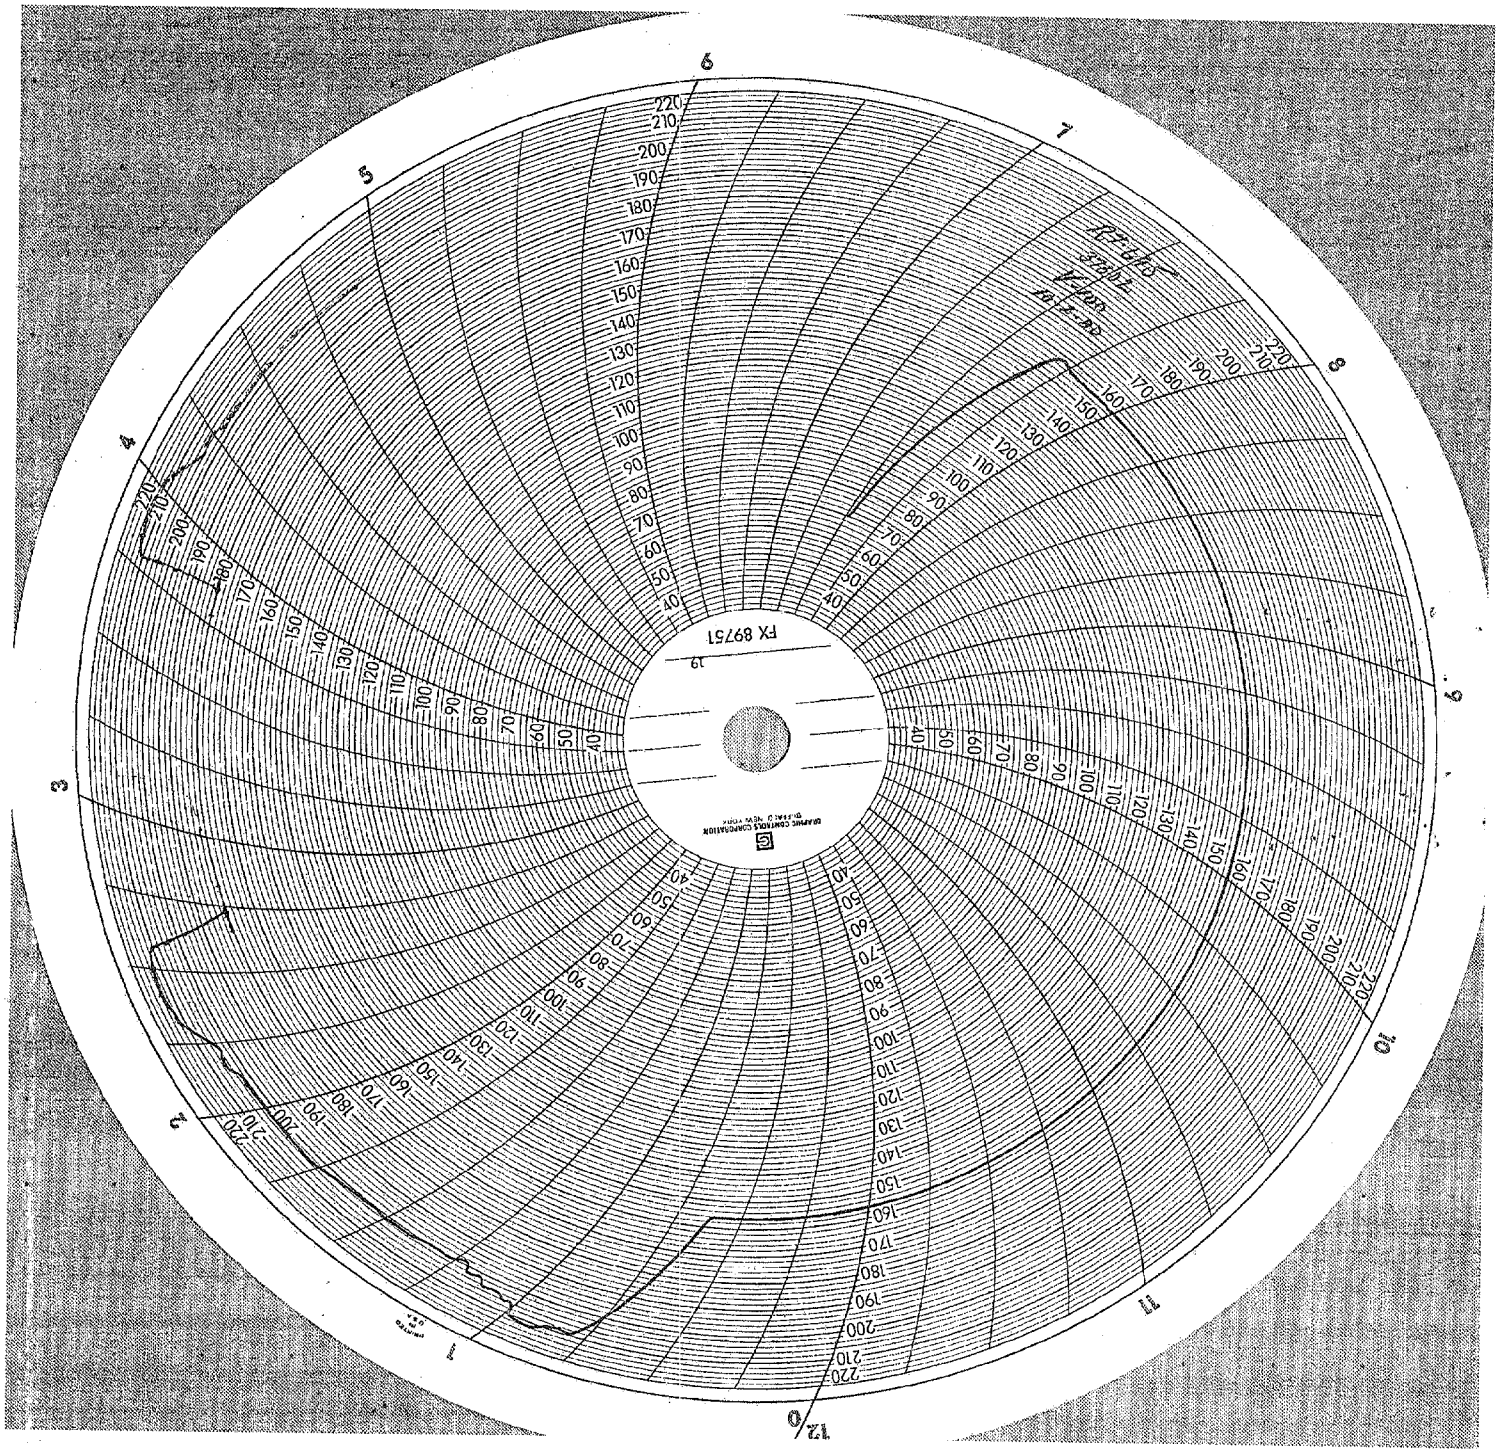
FX 89751