

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

131

FOR THE
Dutch Boy
SALESMAN



00047

00047

NLI 116439

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

131

Selling Points

A handy reference of product information
and sales "keys" designed to help the road
salesman sell the full line of
Blue and White label

Dutch Boy.
PAINT PRODUCTS

Presented to

00047


0657

NLI 116440

00047

0558

NLI 116441

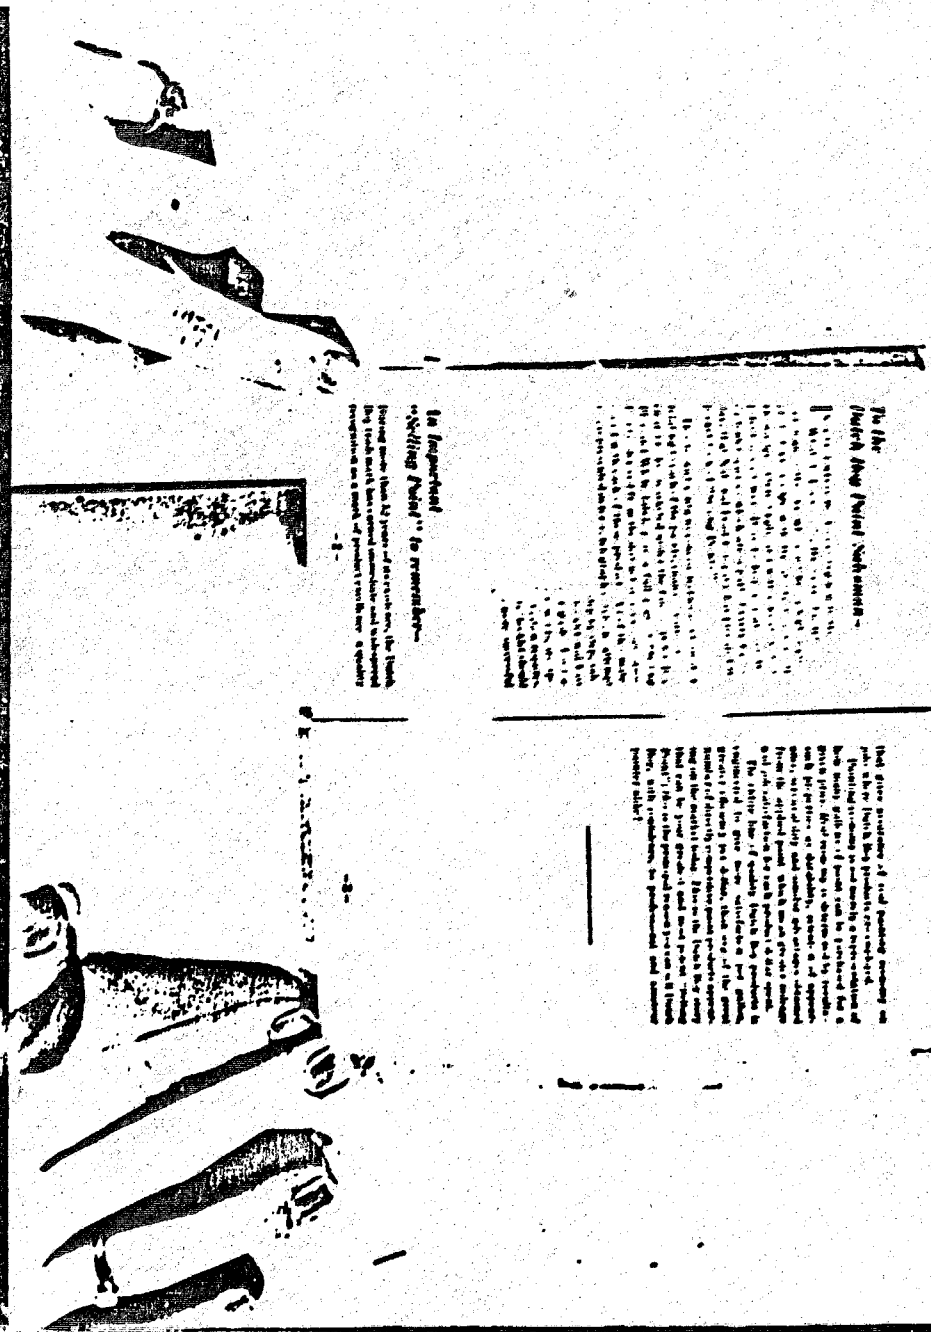

The New Federal Submarine

WASHINGTON, D. C., May 15 (AP)—The Navy today announced that it had selected the General Dynamics Corp. of Quincy, Mass., to build the first of a new class of fleet submarines.

The new class, known as the "Seawolf" class, will be the largest and most powerful fleet submarine ever built. It will be 300 feet long, 30 feet wide and 36 feet high.

An Important "Seafaring Fleet" to be ready

By the time the first "Seawolf" class submarine is launched, the Navy will have a fleet of 10 of these new submarines. The first one is expected to be ready in 1960.

The new building of the fleet submarine is the result of a long and costly process. The first one is expected to be ready in 1960. The new class will be the largest and most powerful fleet submarine ever built. It will be 300 feet long, 30 feet wide and 36 feet high.



NOTICE: if the film image is less clear than this notice, it is due to the quality of the document being filmed

00047

NIJ 116442

0690

CONTENTS

Part 1 - Exterior Symptoms

[illegible]

Section II—Interior Products

Flamed White Knives		1
Flat Wall Knives		1
High-Low Knives		1
Intersect (Two) Knives		1
Latex Flat Pinch		1
Nippers		1
Spork-Like Knives		1
Stain Knives		1
Stain Mark Knives		1
Sparkling White Knives		1
Waxes		1

Section 111 - Wind Stains, Furniture and Other Finishes

[illegible]


Marine II—Primers, Inks, and Miscellaneous Products

Knauf's Enduro	Page	66
Exterior Primer	"	66
Foundation Enduro	"	66
Metal Primer	"	66
Nalprep	"	66
Primaflat Sealer	"	66
Wall Primer & Sealer	"	66
All-Purpose Knauf	"	66
Aluminum Paint	"	66
Base & Bond Paint	"	100
Latex Tintable	"	100
Faste Wand Filler	"	100
Green Knauf	"	100

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

131

NOTES



EXTERIOR
PRODUCTS



00047

NLI 116443

0660

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

CONCRETE FLOOR PAINT

310 Light Drying Base
319 Deep Drying Base

DESCRIPTION

310 is a light drying base paint for concrete floors. It is a white paint with a fine texture and a smooth finish.

USE

For interior and exterior floors of concrete. It is recommended for basements, porches, and other areas where a durable, smooth finish is required.

FINISH

It gives a smooth, even finish to the floor. It is available in two colors: white and light gray.

The previously painted surface and the paint on the floor should be clean and free of dirt.

Note: Before painting, the floor should be cleaned and the paint should be applied in a uniform coat.

APPLICATION

Brush or roller may be used, without stirring, except on rough or uneven surfaces. The material should be applied in a uniform coat and allowed to dry before the next coat is applied.

DETAILS

Spreading Rate	700-800 sq ft per gallon
Drying Time	2 hours
Recoating Time	Overnight
Shelf Life	Indefinite

PACKAGE SIZES

310 Light Drying Base and 319 Deep Drying Base are packed in 1 gallon and 5 gallon cans to permit the customer to choose the size.

Use these paints in the

CONCRETE FLOOR PAINT

PERMANENT RUBBER BASE PAINT completely modern in design - has been developed especially for tough usage in concrete floors.

PROOFED FOR CONCRETE SURFACES which have not been affected by alkali - this permanent paint is designed to resist heat, cold, and wear, and to last in concrete.

INTERIOR EXTERIOR COATING gives excellent protection to concrete surfaces in basements, porches, and other areas.

TAKES PAIN TO HEAVY WEAR this quick drying paint has a hard and firm finish. It is resistant to abrasion, and it is not affected by oil, grease, or other liquids. It is also resistant to acid and alkali.

DRYING IN COLOR a spectacular array of colors from the lightest to the darkest. For the most part, the paint is applied in a uniform coat and allowed to dry before the next coat is applied.

READY TO USE in special pressure containers.

00047

NLI 116444

0661

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed.

00047

NLI 116445

HOUSE PAINT

Copyright © 1999
LIP

2014 年 10 月 10 日

1. The first of the three is the "General" section, which contains the following information:

1974

Edward ... and ...
...
...

Abstract

the Dutch Sea, between France and the Netherlands, and
the Dutch Sea, between France and the Netherlands, and
the Dutch Sea, between France and the Netherlands, and

On the other hand, it is to be noted that the Government has not yet decided whether it will accept the offer of the United States to purchase the surplus stocks of the Government.

APPENDIX

Each spot or color if staining is necessary, use only a small amount of treatment or diluted spot.

NETAN NATA

Spreading Rate	200-400 cu. ft. per acre
Drying Time	 3 days
Recovering Time	 5 days
Ammoniacal	Medium to high initial cost

PACLAF 9203

1-gallon, 1-gallon and 1-quart cans

It is the only point to be noted.

LEGISI PAINT

Donald W. White

RECEIVED: 10.1.1968. The following is a list of the names of the persons who have been named in the above-mentioned document. The names are given in the order in which they appear in the document. The names are given in the order in which they appear in the document.

SUPERIOR QUALITY the post-remediation is all parts of the system are selling "the five year term post". Says John, "the other elements were weathered" and "the system is in excellent condition for several years."

LEON LAYTON, DONALD WHITEHEAD Jim explains
the... while... and...
the... of... and...
... the... of...

... ..

SEA SURVIVOR CRACKS UP **KEARS** Inugh Napht
He also relates the difficulty and effort of
man... "good" as usual - signals and patients with
returned temperature change... stating "errors"
about and uniformly during his of point to produce
normal weather for maintenance training.

TOP-GRADE APPLICATION PROPERTIES - brushes smoothly...covers evenly...builds out to uniform film for maximum protection and service.

- 11 -

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

HOUSE PAINT IN COLOR

100 to 100

110 Light Blending Base
110 Deep Blending Base

DESCRIPTION

Interior paint in 100 to 100. Made in a pure blend of oil and latex. It is a deep, rich color and is a good choice for the interior of a home.

USE

For interior walls of homes and buildings. It is a good choice for the interior of a home.

FINISH

On a smooth surface, it gives a smooth finish. On a rough surface, it gives a rough finish.

On a rough surface, it gives a rough finish. On a smooth surface, it gives a smooth finish.

APPEARANCE

It is a deep, rich color and is a good choice for the interior of a home.

DETAILS

Spread Rate: 100 to 100
Dry Time: 100 to 100
Coverage: 100 to 100
Appearance: 100 to 100

PACKAGE SIZE

100 to 100. Made in a pure blend of oil and latex. It is a deep, rich color and is a good choice for the interior of a home.

Let these points to you

HOUSE PAINT IN COLOR

INDOOR DURABILITY the paint is made from a pure blend of oil and latex. It is a deep, rich color and is a good choice for the interior of a home.

ATTRACTIVE COLOR RANGE is made from a pure blend of oil and latex. It is a deep, rich color and is a good choice for the interior of a home.

GOOD COLOR RETENTION the paint is made from a pure blend of oil and latex. It is a deep, rich color and is a good choice for the interior of a home.

GOOD CLOSE RETENTION the paint is made from a pure blend of oil and latex. It is a deep, rich color and is a good choice for the interior of a home.

PLEASANT PAINT the paint is made from a pure blend of oil and latex. It is a deep, rich color and is a good choice for the interior of a home.

EASY TO USE the paint is made from a pure blend of oil and latex. It is a deep, rich color and is a good choice for the interior of a home.

00047

NLI 116446

NOTICE: If the film image is less clear than the notice, it is due to the quality of the document being filmed

131

HOUSE PAINT

Gloss White
III

DESCRIPTION

Gloss White is a high quality paint with pure linseed oil and the highest quality zinc and lead pigments. It is a true white and is not tinted.

USES

For residential and commercial structures. Use on exterior walls of wood, brick, stone, concrete, plaster, and masonry. Also on interior walls and ceilings where a high gloss finish is desired.

FINISH

On new unpainted or previously painted surfaces. It is easily applied and in good condition. It is a true white and is not tinted. It is a high quality paint with pure linseed oil and the highest quality zinc and lead pigments. It is a true white and is not tinted.

APPLICATION

Brush or spray. If staining is necessary, use an oil-based primer or stain before painting.

DETAIL DATA

Spreading Rate	300-400 sq ft per gal.
Drying Time	Over 24 hours
Recoating Time	3-7 days
Appearance	High gloss finish

PACKAGE SIZES

1-gallon, 5-gallon and 1-quart cans.

- 16 -

It's there, plain to see.

HOUSE PAINT

Gloss White

INDUSTRY'S BEST - Superiorly long recognized by leading professionals, this paint is the quality work... High volume of Dutch Boy White lead pigment gives extra durability, resists cracking, more job satisfaction.

SUPERIOR DURABILITY - The paint is known to every part of the country and selling "the big green house paint" helps keep structures weather tight... gives lasting surface protection.

DESIGNED FOR TINTING - From original gloss to every shade of color, the paint is known to every part of the country and selling "the big green house paint" helps keep structures weather tight... gives lasting surface protection.

EXCELLENT COLOR RETENTION - Made with selected, rich red-oxide pigments, paint film reflects evenly and uniformly... stays white... paint film color is not faded.

NO "WASH DOWN" PROBLEMS - Instead of chalking, this paint gives a smooth, uniform surface... which is the best for painting work in difficult areas... brush or masonry and in areas and subjected to rapid dirt collection.

PREVENTS CRACKING, SCALING - Paint contains Dutch Boy White Lead... which film remains flexible... prepared for top performance on wood siding... film adheres tightly, "gives" to wood expands and contracts through temperature changes.

EASILY APPLIED - High gloss... brush smoothly... covers evenly... does not require film for maximum protection and service.

- 17 -

00047

0665

NLI 116448

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

HOUSE PAINT

One Coat White
104

DESCRIPTION

White paint in 1 lb. tin made from pure white lead, zinc oxide and a special resin.

USES

For exterior use on all surfaces of houses, this paint is the best for use on all outside painted surfaces which are in contact with the weather.

Note: If this paint is to be used on metal, it must be applied to a surface which has been properly prepared.

APPLICATION

Brush or spray. The paint should not be applied in a hurry as it is designed to be applied in a regular house paint.

DETAILS DATA

Spreading Rate 300 sq. ft. per gallon
Drying Time 1 hour
Becoming Tough 1 day
Appearance Medium to light

PACKAGE SIZE

Gallon, 1 gallon and 1 quart sizes

- 15 -

I've been painting for 20 years

HOUSE PAINT

One Coat White

SUPERIOR DURABILITY The paint businessmen to keep paint in the country are calling "the best paint house paint" - Super House Paint and its large surface light, green lasting protection for exposed surfaces.

SPECIAL PROPERTIES FOR ONE COAT WHITE gives greater painting economy... high pigment content... stain and water resistance... paint lays on a smooth film... perfect maximum durability and uniformity in gloss over surfaces suitable for application of a one coat house paint.

DETACHED WHITENESS This is well known... white that is uniform... shall be uniformly... normal natural white... built in detergent action... normal surface that makes white... bright white appearance retained.

PREVENTS CRACKING, SCALING This is tough, yet flexible... "gives" as it goes through alternate expansion and contraction cycle during temperature changes.

EASY APPLICATION smooth flowing consistency... brush or spray... sets on instantly... no lumps.

- 15 -

00047

0666

NLI 11649

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

MASONRY PAINT

100 White
101 Light Blending Base

DESCRIPTION

100 White is a high quality masonry paint...
101 Light Blending Base is a high quality masonry paint...

USES

100 White is used for painting masonry surfaces...
101 Light Blending Base is used for painting masonry surfaces...

FINISHING

For best results, masonry surfaces should be...
Cleanly prepared and free of dirt and oil...

Unpainted masonry and previously painted...
surfaces should be prepared as follows...

APPLICATION

Brush, roller or spray. If painting is necessary...
small amount of pure gum or rosin is required.

DETAIL DATA

Spreading Rate	300 sq ft per gal
Drying Time	1-2 hours
Recoating Time	2-3 hours
Appearance	Flat finish

PACKAGING SIZES
100 White is packed in 5 gallon, 1 gallon and 1 quart...
101 Light Blending Base is packed in 1 gallon and 1 quart...
Go to your nearest dealer for address of nearest Color Blending...

For three points to all—

MASONRY PAINT

SYNTHETIC RUBBER BASE VEHICLES...
promote adhesion and durability of paint...
may be used on masonry surfaces with a slight...
special surface treatment.

MODERN FLAT FINISH...
gives surface and appeal of modern...
flat finish, smooth and uniform.

EXTENDED COLOR RANGE...
in which color range...
from the color fastness of addition to it...
when painted on masonry surfaces...
color range.

LONG LASTING COLOR...
durable film which...
color...
hold color from the fresh look...
film resists blistering and peeling too.

EASY TO USE...
paint is designed for easy application...
over rough, porous materials...
produces a high...
top, protective finish with uniform appearance...
drying quickly.

-2-

00047

0667

NLI 116450

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

NALCRETE

New Aircrete formula
55000 to 55000

DESCRIPTION

It is a new type of concrete...
It is a new type of concrete...
It is a new type of concrete...

USES

It is a new type of concrete...
It is a new type of concrete...
It is a new type of concrete...

PAINTING

It is a new type of concrete...
It is a new type of concrete...
It is a new type of concrete...

When repainting...
When repainting...
When repainting...

APPLICATION

It is a new type of concrete...
It is a new type of concrete...
It is a new type of concrete...

DETAIL DATA

It is a new type of concrete...
It is a new type of concrete...
It is a new type of concrete...

PACKAGE INFO

It is a new type of concrete...
It is a new type of concrete...
It is a new type of concrete...

I'm three points to a N-

NALCRETE

New Aircrete formula

MADE FOR FINISH...
MADE FOR FINISH...
MADE FOR FINISH...

ALSO RESISTANT...
ALSO RESISTANT...
ALSO RESISTANT...

COLOR PERMANENCE...
COLOR PERMANENCE...
COLOR PERMANENCE...

SELF-PRIMING PAINT...
SELF-PRIMING PAINT...
SELF-PRIMING PAINT...

PLAN "BREATHES"...
PLAN "BREATHES"...
PLAN "BREATHES"...

EASY TO USE...
EASY TO USE...
EASY TO USE...

LONG WEARING...
LONG WEARING...
LONG WEARING...

SAVES MONEY...
SAVES MONEY...
SAVES MONEY...

It is a new type of concrete...
It is a new type of concrete...
It is a new type of concrete...

00047

NLI 116451

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

PORCH & FLOOR ENAMEL

220 to 265

DESCRIPTION

High gloss enamel made from steel and chrome. It is a hard, durable, and colored enamel.

USE

Use on all metal floors, steps, and walls. It is a hard, durable, and colored enamel. It is a hard, durable, and colored enamel.

PAINTING

For unpainted metal, use a primer. For painted metal, use a primer. For painted metal, use a primer.

On previously painted surfaces, apply a primer. On previously painted surfaces, apply a primer.

APPLICATION

Brush, roller, or spray. If brushing is necessary, use a brush. If brushing is necessary, use a brush.

DETAIL DATA

Spreading Rate: 200 sq. ft. per gallon. Drying Time: 24 hours. Recoating Time: 24 hours. Appearance: High gloss.

PACKAGE SIZE

1 gallon and 5 gallon cans.

I'm there pronto to sell.

PORCH & FLOOR ENAMEL

OUTSTANDING DURABILITY AND SERVICE means durability when other enamels by other firms are flaking, chipping, or peeling.

USE INSIDE OR OUTSIDE: Excellent performance on wood or concrete surfaces. Dries rapidly. Truly painted surfaces that last for years. It is a hard, durable, and colored enamel.

SAVES TROUBLE: No more time and money spent on top of hardware such as nuts, bolts, and grinding wheels of steel parts. It is a hard, durable, and colored enamel.

STAYS TIGHT: No more peeling. It is a hard, durable, and colored enamel. It is a hard, durable, and colored enamel.

REMARKABLE COLOR AND GLOSS: Retention of original color and gloss. It is a hard, durable, and colored enamel. It is a hard, durable, and colored enamel.

00047

NLI 116452

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

SASH & TRIM COLORS

210 to 290

DESCRIPTION

1. A sash is a strip of material worn over the shoulder and fastened to the waist by a buckle or clasp.

USE

1. A sash is worn over the shoulder and fastened to the waist by a buckle or clasp.

FINISHING

1. The sash should be finished with a hem on the ends and a buckle or clasp on the waist.

APPLICATION

1. The sash should be worn over the shoulder and fastened to the waist by a buckle or clasp.

DETAILS DATA

1. The sash should be made of a material that is strong and durable.

PACKING DATA

1. The sash should be packed in a container that is strong and durable.

For these points to all-

SASH & TRIM COLORS

1. The sash should be made of a material that is strong and durable.

2. The sash should be finished with a hem on the ends and a buckle or clasp on the waist.

3. The sash should be worn over the shoulder and fastened to the waist by a buckle or clasp.

4. The sash should be made of a material that is strong and durable.

5. The sash should be finished with a hem on the ends and a buckle or clasp on the waist.

6. The sash should be worn over the shoulder and fastened to the waist by a buckle or clasp.

7. The sash should be made of a material that is strong and durable.

00047

NLI 116453

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

SHAKE & SIDING PAINT

Shake & Siding Paint
10-10 to 10-10

DESCRIPTION
This paint is a...
USES
This paint is used on...
PACKAGING
This paint is packaged in...
APPLICATION
This paint is applied...
DETAIL DATA
Shake & Siding Paint...
PACKAGE DATA
Shake & Siding Paint...

SHAKE & SIDING PAINT

Shake & Siding Paint

DESCRIPTION
This paint is a...
USES
This paint is used on...
PACKAGING
This paint is packaged in...
APPLICATION
This paint is applied...
DETAIL DATA
Shake & Siding Paint...
PACKAGE DATA
Shake & Siding Paint...

00047

NLI 116454

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

00047

0672

NL1 116455

WHITE LEAD PAINT
181

DISCUSSION

14. 15. 16. 17. 18. 19. 20. 21. 22. 23. 24. 25. 26. 27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37. 38. 39. 40. 41. 42. 43. 44. 45. 46. 47. 48. 49. 50. 51. 52. 53. 54. 55. 56. 57. 58. 59. 60. 61. 62. 63. 64. 65. 66. 67. 68. 69. 70. 71. 72. 73. 74. 75. 76. 77. 78. 79. 80. 81. 82. 83. 84. 85. 86. 87. 88. 89. 90. 91. 92. 93. 94. 95. 96. 97. 98. 99. 100. 101. 102. 103. 104. 105. 106. 107. 108. 109. 110. 111. 112. 113. 114. 115. 116. 117. 118. 119. 120. 121. 122. 123. 124. 125. 126. 127. 128. 129. 130. 131. 132. 133. 134. 135. 136. 137. 138. 139. 140. 141. 142. 143. 144. 145. 146. 147. 148. 149. 150. 151. 152. 153. 154. 155. 156. 157. 158. 159. 160. 161. 162. 163. 164. 165. 166. 167. 168. 169. 170. 171. 172. 173. 174. 175. 176. 177. 178. 179. 180. 181. 182. 183. 184. 185. 186. 187. 188. 189. 190. 191. 192. 193. 194. 195. 196. 197. 198. 199. 200. 201. 202. 203. 204. 205. 206. 207. 208. 209. 210. 211. 212. 213. 214. 215. 216. 217. 218. 219. 220. 221. 222. 223. 224. 225. 226. 227. 228. 229. 230. 231. 232. 233. 234. 235. 236. 237. 238. 239. 240. 241. 242. 243. 244. 245. 246. 247. 248. 249. 250. 251. 252. 253. 254. 255. 256. 257. 258. 259. 260. 261. 262. 263. 264. 265. 266. 267. 268. 269. 270. 271. 272. 273. 274. 275. 276. 277. 278. 279. 280. 281. 282. 283. 284. 285. 286. 287. 288. 289. 290. 291. 292. 293. 294. 295. 296. 297. 298. 299. 300. 301. 302. 303. 304. 305. 306. 307. 308. 309. 310. 311. 312. 313. 314. 315. 316. 317. 318. 319. 320. 321. 322. 323. 324. 325. 326. 327. 328. 329. 330. 331. 332. 333. 334. 335. 336. 337. 338. 339. 340. 341. 342. 343. 344. 345. 346. 347. 348. 349. 350. 351. 352. 353. 354. 355. 356. 357. 358. 359. 360. 361. 362. 363. 364. 365. 366. 367. 368. 369. 370. 371. 372. 373. 374. 375. 376. 377. 378. 379. 380. 381. 382. 383. 384. 385. 386. 387. 388. 389. 390. 391. 392. 393. 394. 395. 396. 397. 398. 399. 400. 401. 402. 403. 404. 405. 406. 407. 408. 409. 410. 411. 412. 413. 414. 415. 416. 417. 418. 419. 420. 421. 422. 423. 424. 425. 426. 427. 428. 429. 430. 431. 432. 433. 434. 435. 436. 437. 438. 439. 440. 441. 442. 443. 444. 445. 446. 447. 448. 449. 450. 451. 452. 453. 454. 455. 456. 457. 458. 459. 460. 461. 462. 463. 464. 465. 466. 467. 468. 469. 470. 471. 472. 473. 474. 475. 476. 477. 478. 479. 480. 481. 482. 483. 484. 485. 486. 487. 488. 489. 490. 491. 492. 493. 494. 495. 496. 497. 498. 499. 500. 501. 502. 503. 504. 505. 506. 507. 508. 509. 510. 511. 512. 513. 514. 515. 516. 517. 518. 519. 520. 521. 522. 523. 524. 525. 526. 527. 528. 529. 530. 531. 532. 533. 534. 535. 536. 537. 538. 539. 540. 541. 542. 543. 544. 545. 546. 547. 548. 549. 550. 551. 552. 553. 554. 555. 556. 557. 558. 559. 560. 561. 562. 563. 564. 565. 566. 567. 568. 569. 570. 571. 572. 573. 574. 575. 576. 577. 578. 579. 580. 581. 582. 583. 584. 585. 586. 587. 588. 589. 590. 591. 592. 593. 594. 595. 596. 597. 598. 599. 600. 601. 602. 603. 604. 605. 606. 607. 608. 609. 610. 611. 612. 613. 614. 615. 616. 617. 618. 619. 620. 621. 622. 623. 624. 625. 626. 627. 628. 629. 630. 631. 632. 633. 634. 635. 636. 637. 638. 639. 640. 641. 642. 643. 644. 645. 646. 647. 648. 649. 650. 651. 652. 653. 654. 655. 656. 657. 658. 659. 660. 661. 662. 663. 664. 665. 666. 667. 668. 669. 670. 671. 672. 673. 674. 675. 676. 677. 678. 679. 680. 681. 682. 683. 684. 685. 686. 687. 688. 689. 690. 691. 692. 693. 694. 695. 696. 697. 698. 699. 700. 701. 702. 703. 704. 705. 706. 707. 708. 709. 710. 711. 712. 713. 714. 715. 716. 717. 718. 719. 720. 721. 722. 723. 724. 725. 726. 727. 728. 729. 730. 731. 732. 733. 734. 735. 736. 737. 738. 739. 740. 741. 742. 743. 744. 745. 746. 747. 748. 749. 750. 751. 752. 753. 754. 755. 756. 757. 758. 759. 760. 761. 762. 763. 764. 765. 766. 767. 768. 769. 770. 771. 772. 773. 774. 775. 776. 777. 778. 779. 780. 781. 782. 783. 784. 785. 786. 787. 788. 789. 790. 791. 792. 793. 794. 795. 796. 797. 798. 799. 800. 801. 802. 803. 804. 805. 806. 807. 808. 809. 810. 811. 812. 813. 814. 815. 816. 817. 818. 819. 820. 821. 822. 823. 824. 825. 826. 827. 828. 829. 830. 831. 832. 833. 834. 835. 836. 837. 838. 839. 840. 841. 842. 843. 844. 845. 846. 847. 848. 849.

1994

...and ...
...the ...
...and ...

Abstract

[illegible]

APPLICATION

APPLICATION

Brush or spray if blowing is necessary.
Amount of temperature on animal's body.
Temperature is much as temperature should be
indication of animal's age.

REAL DATA

DETAIL DATA

| | | |
|----------------|------------|------------|
| Spreading Rate | 200.000 lb | per 100 sq |
| Drying Time | | Over 24 |
| Sealing Time | | 24 |
| Other Remarks | | Feed |

DATE: 01/01/2019

PACKAGE SIZES
 Single, 1 gallon and 5 quart sizes.

It is the same product as well.

WHITE LEAD PAINT

SUPPLEMENTARY INFORMATION: The joined human genome covers
three million cells; the two gene human genome... helps
keep human and other organisms healthy and
fending off disease and helps the immune system... gives insight
into the molecular basis of human disease.

POSTING WITH LEAD SAKIATSI The unique addition given a poster an amazing advantage over ordinary poster points... poster has higher selling price... poster gains 1 to 5 times higher... gives also results... dramatic effects of images, messages, messages... advertiser always start of normal thinking... repeated shaking your.

[illegible]

has all advantages of white lead paint - fast covering and "slip" for easy application... less liability for fading with sun... less color absorption... popularity of paint has been greater since... less maintenance and fewer color-matching problems... paint has greater resistance to discoloring caused by metal corrosion.

-31-

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

131

NOTES

INTERIOR
PRODUCTS



00047

0673

NLI 116456

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

DIAMOND WHITE ENAMEL

DESCRIPTION

Runs on water, water or paint. Made from a combination of high quality enamel and a special resin in 212 Gm and 11 1/2 lb. can.

ON 1

Interior walls and windows. Wood and particularly suitable for kitchen and bathroom.

PAINTING

On new or unpainted plaster, surface is a mixture of 212 Gm and 11 1/2 lb. can. Apply a first coat. If painting white enamel may be applied over a first coat. For a finish of superior quality, an intermediate coat of 212 Gm and 11 1/2 lb. can is recommended before finishing. For a first coat on new or unpainted wood, 11 1/2 lb. can is recommended.

APPLICATION

Brush or roller. This material should be used in a thin layer. Do not add more than one coat. Several coats are necessary for a good finish. The surface should be smooth.

SPREAD DATA

Spreading Rate 212-400 sq. ft. per gal.
Drying Time 24 hours
Recoating Time 24 hours
Glass Transition 140°F

PACKAGE SIZE

1 gallon, 5 gallon, and 1 pint can.

212-712 Gm is available also in 1/2 lb. can.

- 34 -

I'm there people to sell.

DIAMOND WHITE ENAMEL

GLASS ON NEW LUSTRE FINISH ... outstanding quality of the diamond white enamel ... provides a clean, bright finish ... sparkling 212 Gm and 11 1/2 lb. can. ... the white, shiny look of 212 Gm and 11 1/2 lb. can. ... the white, shiny look of 212 Gm and 11 1/2 lb. can.

"WHITE" WHITE enamel is unpainted for white ... the white, shiny look of 212 Gm and 11 1/2 lb. can. ... the white, shiny look of 212 Gm and 11 1/2 lb. can.

RECOMMENDATIONS combination of white enamel and carefully selected pigments ... the white, shiny look of 212 Gm and 11 1/2 lb. can. ... the white, shiny look of 212 Gm and 11 1/2 lb. can.

TOPS IN FINISH ability to produce a clean, gleaming white finish is unmatched by any other enamel ... the white, shiny look of 212 Gm and 11 1/2 lb. can. ... the white, shiny look of 212 Gm and 11 1/2 lb. can.

EASY APPLICATION this enamel flows up readily, without sagging ... the white, shiny look of 212 Gm and 11 1/2 lb. can. ... the white, shiny look of 212 Gm and 11 1/2 lb. can.

SHOWN, NEW FINISH surface looking properties ... the white, shiny look of 212 Gm and 11 1/2 lb. can. ... the white, shiny look of 212 Gm and 11 1/2 lb. can.

DURABLE, HIGH-QUALITY FINISH this is tough ... the white, shiny look of 212 Gm and 11 1/2 lb. can. ... the white, shiny look of 212 Gm and 11 1/2 lb. can.

- 35 -

00047

0674

NLI 116457

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

131

FLAT WALL ENAMEL

613 White
608 Light Beaming Blue
609 Deep Beaming Blue

DESCRIPTION

Flat Wall Enamel is made of pure enamel...
and is a great deal better than the old
type of enamel used in the past.

USE

For interior use on walls and ceilings...
this enamel is the best of its kind.

FINISH

For best results on walls which have been...
this enamel is the best of its kind.

APPLICATION

Brush or apply with a roller...
this enamel is the best of its kind.

STAIN DATA

Staining Blue 608
Staining Blue 609
Staining Blue 613

PACKAGING DATA

613 White is packed in 5-gallon...
608 Light Beaming Blue and 609 Deep Beaming Blue are
packed in 1-gallon and 5-gallon cans to permit the user
of required Color Shades.

For these points to all—

FLAT WALL ENAMEL

ENDURING COLOR PROTECTION Flat Wall Enamel...
from the 1910s to the 1950s...
this enamel is the best of its kind.

WASH, WASH, WASH...
this enamel is the best of its kind.

MODERN ARTS ENAMEL...
this enamel is the best of its kind.

WASH, WASH, WASH...
this enamel is the best of its kind.

VARIABLE FINISH...
this enamel is the best of its kind.

CHOOSE TWO...
this enamel is the best of its kind.

WASH, WASH, WASH...
this enamel is the best of its kind.

EASY TO USE...
this enamel is the best of its kind.

00047

0675

NLI 116458

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

HIGH LUSTRE ENAMEL

12-00 Light Blending Base
12-00 Deep Blending Base

DESCRIPTION

High gloss enamel finish made from top quality materials and is perfect for interior and exterior use.

USES

Interior and exterior surfaces of all types of furniture, cabinets, appliances, etc.

FINISH

To prepare interior, unpainted wood surfaces, coat with High Lustre Enamel Undercoat. This Primer is recommended as a first coat for all wood.

APPLICATION

Brush or spray the enamel without dilution. Apply with care, especially on points of sharp angles. Use any color of the same color as to be used. Dry thoroughly before starting or at all.

COATING DATA

| | |
|----------------|-------------|
| Spreading Rate | 200 sq. ft. |
| Drying Time | 15 min. |
| Recoating Time | 24 hrs. |
| Appearance | High Gloss |

PACKAGE SIZE

12-00 Light Blending Base and 12-00 Deep Blending Base are packed in 1 gallon and 1 quart cans to permit no loss of required color balance.

For these points to sell—

HIGH LUSTRE ENAMEL

SUPERIOR DURABLE FINISH—A high gloss enamel for decorating interior and exterior surfaces. Perfect for cabinets, woodwork, furniture, etc. Give top quality finish on such surfaces, without time, material expense.

BRIGHT, UNIFORM FINISH— enamel produces a uniformly sparkling finish... gives magnetic side strength and modern architectural features.

UNLIMITED COLOR SELECTION—There's a full choice from all 112 colors of enamel finish (light to light blue), more than 25 base for various applications... and range of desirable colors means decorating effects are limited only by the imagination and daring of man.

WONDERFULLY EASY TO USE—This fast drying enamel gives effortless application... even on irregular shapes. Give a finish of exceptional smoothness... the best of brush methods no longer... done quickly.

PERMANENT DURABILITY—This is a finish with all the advantages of a permanent finish... gives long life on exterior surfaces... gives long life on exterior surfaces... gives long life on exterior surfaces... gives long life on exterior surfaces...

RETAINS APPEARANCE UNDER—weatherable glass protecting large weathered surfaces looking smart and bright... finish resists fading, staining, and moisture... interior surfaces can be wiped clean and restored to original brightness easily and quickly... colors deepened for exterior use are noted for resistance to chalking and fading.

00047

0576

NLI 116459

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

INTERIOR GLOSS ENAMEL 610 No 600

DESCRIPTION
High gloss, level enamel. Made in a special
process, which gives it a smooth, level
and glossy finish and color.

USES
Recommended for use on walls of interior
rooms, hallways, and on all other
surfaces which may be exposed to wear and
tear.

FINISH
On unpainted wood apply a coat of 610 No 600
Undercoat. To give greater adhesion to
surfaces use 610 No 600 Primer & Seal.
Pumpkin Brown for metal use 610 No 600.

APPLICATION
Brush in color if staining is necessary use
amount of enamel given.

TECHNICAL DATA
610 No 600 per gal
Coverage 100 sq ft
Drying Time 24 hrs
Recoating Time 48 hrs
Appearance

PACKAGE SIZE
1 gallon and 1 quart cans.
Note: 610 White is available also in 5 gallon can.

Use these points to sell

INTERIOR GLOSS ENAMEL

USE THROUGHOUT HOME this enamel creates bright,
reflecting spots in all areas... it has add seal to
flooring... tough finish resists moisture, extreme heat
... great for kitchen, bathroom, laundry, playroom,
etc.

OUTSTANDING FINISH high gloss highlights colors...
sheds moisture... resists staining, scratching.

EASY TO KEEP CLEAN just hard film does staining
from splatters, mud, grease, road-salts, chewing gum
... wipe up with a damp rag... enamel's hard
surface shines... abrasives cleaners don't damage
finish or its appearance.

RETAINS COLOR AND GLOSS enamel film has excep-
tional durability... colors don't fade... gloss doesn't
disappear when painted surface is washed or scrubbed
... removal of "dirt" "dust" soap films and stained
surface abrasives quickly restores original luster
of film... appearance is unaffected by staining with
strong bleaching or marking compounds.

EASY TO USE this enamel flowing enamel goes on
readily with brush or roller... high degree of leveling
demands disappearance of brush marks and roller
stipples... moderate setting rate aids application
over large surfaces... just-painted areas retain needed
"wet edge" for joining adjacent sections... "body"
of this enamel minimizes splattering, even during
roller application.

00047

NLI 116460

0677

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed.

131

LATEX FLAT FINISH

70-00 Light Shading 51

DESCRIPTION

Flat latex at 10-15% solids of 100% ...
 latex is a compound of a given ...
 70 units from the (Latex Co. Co.)

USES

Interior walls and ceilings of houses ...
 on painted surfaces in unexposed ...

FORMING

No primer coating is necessary when using ...
 except where metal surfaces are to be ...
 100% a flat coat of Latex Co. Co. is ...
 applied.

APPLICATION

Brush, roller or spray. If shading is desired ...
 water. No more than one coat of latex ...
 added to each gallon of paint.

DETAIL DATA

| | |
|----------------|----------------------|
| Spreading Rate | 300 sq. ft. per gal. |
| Drying Time | 1 hour |
| Recoating Time | 2 hours |
| Appearance | Flat |

PACKAGE SIZE

70-00 Light Shading latex is packed in 1 gallon and 5 gallon cans to permit the addition of required Color Shading.

In these points to note

LATEX FLAT FINISH

REAL ADVANTAGES OF ACTIVE LATEX - this all-
 water latex finish holds on to pigment ...
 longer lasting coating ... gives excellent durability ...
 film is stable and doesn't become brittle with age.

SOFTLY BLENDED - the smooth texture of selected latex
 from the 10-15% solids ... all are soft, clean lines
 but which the (Latex Co. Co.) is noted ... colors are
 stayed right for decorating.

FLATNESS FINISH - true flat finish shows no irregularities
 when in place ... adds richness to colors ... when per-
 mitted a wide range of light, bright colors for further
 decorating effects ... flat finish looks as made out-
 side doors or irregularities.

CRACKS STAY DOWN - acrylic resin in the coating
 are mixed for ability to retain original adhesion quality
 ... they don't affect appearance of paint colors.

WONDERFULLY EASY TO USE - just mix up as all you
 want, instantly ... no primer needed, even for bare
 plaster ... smooth, clean flat gives more uniform
 coverage ... quick, 2-hour dry puts your painted rooms
 back into service almost immediately.

EXCELLENCE IN CRACKS - active latex used in Latex Flat
 Finish ... acrylic resin is active, ... painting is
 almost effortless.

QUICK, EFFORTLESS CLEAN UP - water easily
 cleans up brushes, rollers, and other equipment.

00047

0678

NLI 116461

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

NALPLEX FD-11 to FD-16

DESCRIPTION

Light gray, streaky, made of fine, white, crystalline particles, which are easily dispersed in water and form a stable suspension.

USE

Use in water for the purpose of cleaning and degreasing. It is used in the form of a suspension in water, and is applied by spraying or brushing.

PREPARATION

For the purpose of cleaning, a suspension of Nalplex in water is prepared. The concentration of the suspension is determined by the nature of the surface to be cleaned.

APPLICATION

Apply the suspension to the surface to be cleaned. It may be applied by spraying or brushing. The surface should be kept wet for a few minutes, and then rinsed with water.

STORAGE DATA

Shelf life: 12 months. Storage temperature: 50°F to 100°F. The product should be stored in a cool, dry place, away from direct sunlight.

PACKAGE INFO

Available in 1 and 5 lb. bags. Also available in 10 lb. bags.

Other: FD-11, FD-12, FD-13, FD-14, FD-15, FD-16.

- 66 -

For these products see also:

NALPLEX

Interior Film Wall Finish

100% ACRYLIC LAMINATE - special, easily applied, ready to use, acrylic film wall finish. It is applied by spraying or brushing.

DECORATIVE FINISH - in any color, can be interchanged with acrylic latex. It gives Nalplex a more lasting than traditional finishes. Means greater and more permanent.

DOORWAYS - no problem with doors and windows. Nalplex acrylic latex is suitable for painting in any color.

FAST DRY - Nalplex acrylic latex dries in two hours at 70°F. It is highly resistant to wear and tear.

HEAVY DUTY - Nalplex acrylic latex is not affected by moisture. It produces a tough, light film which is suitable for use in areas of moisture. It is suitable for use in areas of moisture.

USE ON ALL SURFACES - acrylic latex and acrylic pigments used in Nalplex are not affected by alkali. Nalplex gives excellent adhesion and finish even on old and new plaster.

TRUE, FLAT FINISH - lighter pigment content in Nalplex means a flatter finish. Nalplex appearance adds to richness of colors and creates a smooth appeal.

BETTER COVERAGE - acrylic latex does not mask or alter existing effects of other pigments. Full color develops most possible. Nalplex colors are stronger, truer. They remain clear and fresh because acrylic latex does not yellow with passage of time.

QUICK, EFFORTLESS CLEAN UP - warm water easily rinses up brushes, rollers, other equipment.

- 66 -

00047

0679

NLI 116462

NOTICE: If the film image is less clear than the notice, it is due to the quality of the document being filmed

131

QUICK-DRYING ENAMEL 710 to 700

DESCRIPTION

High gloss enamel in one coat. Dries in 15 minutes. Available in white, black, and colors.

USES

Interior and exterior surfaces of steel, aluminum, copper, and brass. Also suitable for wood and masonry.

FINISH

For most surfaces, apply a first coat of 1/2 inch and a second coat of 1/4 inch. Allow 15 minutes between coats.

APPLICATION

Brush or spray. The enamel should be applied in a uniform coat. Do not apply to surfaces that are wet or oily.

OTHER DATA

Spreading Rate: 10 sq ft per gallon
Drying Time: 15 minutes
Recoat Time: 1 hour

PACKAGING

1 gallon, 5 gallon, 10 gallon, and 20 gallon cans. Available in 200 Chem-Dyne and 201 Chem-Dyne.

I've three points to sell.

QUICK-DRYING ENAMEL

ALL PURPOSE FINISH - enamel that literally bonds to all surfaces - metal and masonry, but particularly shines on steel as well as on painted surfaces - great for furniture, radiators, appliances, tools - even suitable for brick, too.

BOLD VIBRANT COLORS - only pure pigments are used and colors are designed to retain high degree lasting maintenance of enamel. Colors are highlighted by glass beads... a full range of striking hues is available.

OUTSTANDING DURABILITY - paint is remarkably tough and rugged - stands up under toughest weathering conditions... won't crack or chip... gives full protection for years.

USES EVERYWHERE - no other enamel is so ready for use on such a wide range of surfaces - household and business machinery, farm implements, furniture, etc. - quick-dry feature simplifies "odd job" painting which must be done in a limited time.

RETAINS GLOSS AND COLOR - gleaming high gloss finish resists weathering, moisture, grease, staining... retains its shine and luster... stays strong and clear.

SAVE TO 50% - enamel flows on surfaces quickly and evenly... leveling properties ensure finish of enamel immediately without extensive brushing or working... brush marks disappear during drying period.

-62-

00047

06747

NLI 116463

THOMAS BAKER CO.

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

SATIN EGGSHELL

310 to 340

DESCRIPTION

Super high strength made with pure egg shell...
with a glass rate to 2%...
We are 22 inches

USES

Interior walls, ceilings, and floors...
and bathroom

FINISHING

On new or expanded wall apply a thin...
layer of primer...
Buck Bay Primer...
Buck Bay Primer...
Buck Bay Primer...

APPLICATION

Brush or roller...
amount of material...
brush or roller...

DETAIL DATA

Spreading Rate...
Brush Rate...
Spreading Rate...
Brush Rate...

PACKAGE SIZES

1 gallon and 1 quart cans...
also 500 white and 500 grey to one available...
Buck Bay

Use these points to sell-

SATIN EGGSHELL

MODERN DAY EGGSHELL...
superior strength...
Buck Bay...
Buck Bay...

SATIN EGGSHELL...
superior strength...
Buck Bay...
Buck Bay...

NEW CLEAN UP FEATURE...
superior strength...
Buck Bay...
Buck Bay...

NO COSE...
superior strength...
Buck Bay...
Buck Bay...

EXCEPTIONAL ADHESION...
superior strength...
Buck Bay...
Buck Bay...

INCREASED STAIN RESISTANCE...
superior strength...
Buck Bay...
Buck Bay...

SCHEMATIC...
superior strength...
Buck Bay...
Buck Bay...

COLOUR...
superior strength...
Buck Bay...
Buck Bay...

UNIVERSAL TO USE...
superior strength...
Buck Bay...
Buck Bay...

00047

061817

NLI 116464

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

SATIN FINISH ENAMEL

11-05 Light Glossy Finish
11-06 Deep Glossy Finish

DESCRIPTION
Satin finish enamel is a high gloss finish that is used for interior and exterior surfaces. It is available in two colors: 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

USES
Satin finish enamel is used for interior and exterior surfaces. It is available in two colors: 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

FINISHES
Satin finish enamel is available in two colors: 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

APPLICATION
Satin finish enamel is applied to interior and exterior surfaces. It is available in two colors: 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

STAIN DATA
Satin finish enamel is resistant to staining. It is available in two colors: 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

REMARKS
Satin finish enamel is available in two colors: 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

(For these points below)

SATIN FINISH ENAMEL

MODERN ALLOY ENAMEL is a new enamel which has been developed to give a satin finish to metal surfaces. It is available in two colors: 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

BEAUTIFUL SATIN FINISH is a new finish which has been developed to give a satin finish to metal surfaces. It is available in two colors: 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

COLORS AVAILABLE are 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

DOOR-TO-DOOR ENAMEL is a new enamel which has been developed to give a satin finish to metal surfaces. It is available in two colors: 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

EXCELLENT MOISTURE RESISTANCE is a new enamel which has been developed to give a satin finish to metal surfaces. It is available in two colors: 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

NO STAIN RESISTANCE is a new enamel which has been developed to give a satin finish to metal surfaces. It is available in two colors: 11-05 Light Glossy Finish and 11-06 Deep Glossy Finish.

00047

06812

NLI 116465

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

SPARKLING WHITE ENAMEL

DESCRIPTION

Sparkling White Enamel is a high grade enamel for use on glass, metal, and plastic. It is available in 1/2 gallon and 1 gallon sizes.

USE

Enamel can be used on glass, metal, and plastic. It is available in 1/2 gallon and 1 gallon sizes.

FORMING

On new or repaired glass, metal, and plastic. It is available in 1/2 gallon and 1 gallon sizes.

For a list of dealers or suppliers, see the back of this folder.

APPLICATION

Brush or spray. The enamel goes on in one coat. It is available in 1/2 gallon and 1 gallon sizes.

DETAILS DATA

Spreading Rate: 100 sq. ft. per gallon
Drying Time: 30 min.
Resisting Time: 30 min.
Gloss and Color Retention: Excellent

PACKAGE INFO

1 gallon, 1 quart and 1 pint cans.

For the product name

SPARKLING WHITE ENAMEL

Sparkling White Enamel is a high grade enamel for use on glass, metal, and plastic. It is available in 1/2 gallon and 1 gallon sizes.

Enamel can be used on glass, metal, and plastic. It is available in 1/2 gallon and 1 gallon sizes.

TWO DEGREES OF GLOSS

Enamel can be used on glass, metal, and plastic. It is available in 1/2 gallon and 1 gallon sizes.

Enamel can be used on glass, metal, and plastic. It is available in 1/2 gallon and 1 gallon sizes.

DETAILS DATA

Spreading Rate: 100 sq. ft. per gallon
Drying Time: 30 min.
Resisting Time: 30 min.
Gloss and Color Retention: Excellent

PACKAGE INFO

1 gallon, 1 quart and 1 pint cans.

00047

00003

NLI 116466

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

WONSOVER

410 420

DESCRIPTION

1. The first step is to identify the problem or goal. This involves understanding the current situation and what needs to be achieved.

• 2004

... ..
... ..
... ..

Principles

Wastewater is still pumping and may be the application of more than one inch of water for baricles which the wastewater permits. Not Dutch Bay West Pines & Bay West Pines may be used as a first cost.

APPLICATION

Book of rolls of the names of persons who
are members of the church

NETAL DATE

Sowing Date 100 100 100
 Drying Time 100 100 100
 Sowing Time 100 100 100
 Approved 100 100 100

PACKAGE SIZES

1-gallon and 1-quart cans

002: 000 there is available also in 1 gallon and 2 1/2 gallon
002: 000 there is available also in 1 gallon and 2 1/2 gallon

-4-

WONSOVER

There are no points for sale

ACCORDING TO THE REPORT, THE OFFICE OF THE ATTORNEY GENERAL...

[illegible]

FOUR. MAY 1961 - New Ball P... uniform appear...

also had increased by glossy highlights of irregularity in the dense stem light diffusion for better overall effect.

DIFFERENT COLORS full color range includes the new

put and have to make a serious decision... all out, no compromise, with deep-seated values, and from late evenings... each value is designed to go with all others in the line.

REMARKABLE NOTES: The above contains pictures

It is the policy of the United States to support the people of the Republic of China in their struggle against the Chinese Communists. The United States will continue to provide the Republic of China with the military and economic assistance it needs to defend its freedom and its people. The United States will also continue to support the Republic of China in its efforts to maintain its position as the only government in China which is recognized by the United States and a large number of other countries.

UNUSUAL APPEARANCE looking and their properties

with a uniform size and shape... the top margin where was pointed out as joined to next.

~~SECRET~~ only selective advisors used in connection with this document.

... painting is over, unbroken
summitry and mountains, clouds, flowers, blue sky.

made monster, abracadabra, strong strong solutions...

double ended and flat appearance also described... for
... and treatment of disease.

NTI 116467

5890

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

131

0111



WOOD STAINS,
VARNISHES, AND
CLEAR FINISHES



00047

0605

NLI 116468

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

CRYSTALOID

Clear Glass Finish

PG 25

DESCRIPTION

CRYSTALOID is a clear, non-toxic, water-soluble, and non-flammable material.

USES

CRYSTALOID is used for the following purposes:

STAINING

CRYSTALOID is used for staining wood, metal, and other materials.

APPLICATION

CRYSTALOID is applied by brush, spray, or dip.

DESIGN DATA

CRYSTALOID is available in the following quantities:

PACKAGE SIZES

CRYSTALOID is packaged in the following quantities:

For these points in all

CRYSTALOID

Clear Glass Finish

CRYSTALOID is a clear, non-toxic, water-soluble, and non-flammable material.

CRYSTALOID is used for the following purposes:

CRYSTALOID is used for staining wood, metal, and other materials.

CRYSTALOID is applied by brush, spray, or dip.

CRYSTALOID is available in the following quantities:

CRYSTALOID is packaged in the following quantities:

00047

000000

NLI 116469

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

CRYSTALOID

Clear Soluble Film

FD-36

DESCRIPTION

A transparent, clear, soluble film, 1/2 inch wide, 1/2 inch thick, and 1/2 inch long.

USE

As a clear, soluble film, it is used for the production of clear, soluble films.

STANDARD

FD-36 is a standard film, 1/2 inch wide, 1/2 inch thick, and 1/2 inch long.

APPLICATION

FD-36 is used in the production of clear, soluble films.

GENERAL DATA

Spreading Rate: 100 sq ft per 100 lb
Drying Time: 12 hours
Removal Time: 12 hours
Removal Time: 12 hours

REMARKS

Together, 1 report and 1 film roll.

CRYSTALOID

Clear Soluble Film

1/2 inch wide, 1/2 inch thick, and 1/2 inch long

FD-36 is a standard film, 1/2 inch wide, 1/2 inch thick, and 1/2 inch long.

FD-36 is a standard film, 1/2 inch wide, 1/2 inch thick, and 1/2 inch long.

FD-36 is a standard film, 1/2 inch wide, 1/2 inch thick, and 1/2 inch long.

FD-36 is a standard film, 1/2 inch wide, 1/2 inch thick, and 1/2 inch long.

FD-36 is a standard film, 1/2 inch wide, 1/2 inch thick, and 1/2 inch long.

00047

00047

NLI 116470

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

CRYSTALOID

Floor & Wood Clear Coats

PG 61

DESCRIPTION

A penetrating, clear, water-based wood preservative and finish.

USES

For staining all types of light-colored wood and for protecting wood from decay and insect attack.

RECOMMENDED MIXING RATIO

Crystaloid Clear Coat for Floor & Wood Clear Coats is used as a wood preservative and finish. It is applied in a thin coat.

APPLICATION

Brush or roller the mixture onto the wood surface. Allow to dry.

STAIN DATA

Spreading Rate: 100 sq ft per gallon
Drying Time: 2 hours
Recoating Time: 24 hours
Appearance: Clear

PACKAGE SIZES

1 gallon, 1 quart and 1 pint cans.

CRYSTALOID

Floor & Wood Clear Coats

PREPARATION & USE: A half pint of the wood preservative, mixed with one quart of water, is applied to the wood surface. The mixture is then allowed to dry.

PAINTING & SEALING: The mixture is applied to the wood surface. It is then allowed to dry. The mixture is then applied to the wood surface.

EASY AND SAFE TO USE: The mixture is applied to the wood surface. It is then allowed to dry. The mixture is then applied to the wood surface.

FOR ALL WOODS AND SURFACES: The mixture is applied to the wood surface. It is then allowed to dry. The mixture is then applied to the wood surface.

00047

0690

NLI 116471

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

CRYSTALOID

Page 19 of 19

Discussion

1. The first group of people who are interested in the study of the history of the United States are the people who are interested in the history of the United States.

448

1. The first group of people who are not allowed to enter the country are those who are considered to be a threat to national security. This includes anyone who is suspected of being involved in terrorism, espionage, or other activities that could harm the country's interests.

RECOMMENDED FOR SEAT

RECEIVED 1965 MAR 25

ABSTRACT

1. The first part of the document is a list of names and addresses, which appears to be a directory or a list of contacts. The names are written in a cursive script, and the addresses are listed below them.

15748 5478

Speed of Run
 Drilling Time
 Drilling Time
 Drilling Time
 Drilling Time

PACKAGE NAME

1-20-68 1-20-68 1-20-68 1-20-68 1-20-68

CRYSTALOID

Word Bank

1994

MOBILE, ALA., May 10, 1900. - The following is a list of the names of the persons who have been arrested by the Mobile Police Department since the 1st of May, 1900, and who are now in the custody of the Mobile Police Department, and who are not yet released.

PA 1929 0014873

PAINTED SURFACES - Always dry in sun for 48 hrs...
is a r of age can be applied after 48 hrs...
is a r of age can be applied after 48 hrs...
is a r of age can be applied after 48 hrs...
is a r of age can be applied after 48 hrs...

VERBA ALIBI

THESE SLAVE COPIES WERE THE ONLY SLAVE COPIES
... AND WERE KEPT IN THE ...

NON-SMOKING ATTITUDE

RECOMMENDATIONS The production team focus on a set of... the marketing efforts to sell would have to cover the ground... the short run at a cost to today product design... the "upping" is necessary.

Abstract

ONLY TRANSPARENT FROM the combination of white
- - - - - and transparent pigments creates a dis-
- - - - - tinguished clarity... the light and grace of a new
- - - - - material... a color when the world is stopped.

Abstract

LEONARD FILM STAFFERY seems developed exclusively for the established World Motion picture business as the film does not reach the same... the original film effort is retained for the life of the film.

100

00047

NIJ 116472

金

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

OIL WOOD STAINS

1. The no. of persons for the H=

DISCUSSION

1. The first part of the document is a list of names and addresses, which appears to be a directory or a list of contacts. The names are written in a cursive script, and the addresses are listed below them. The list includes names such as "John A. Smith", "Mary E. Jones", and "Robert L. Brown".

• **2004-2005**

For the past several years, the
and on all other lines, the
and on all other lines, the

RECOMMENDED FINISH COATS

Both Bay Crystal and Clear are recommended for use with Oil Wood stains.

APPLICATION

Any method that will produce a good
the wood surface is recommended for
treating with a stain treatment may
should be used as supplied in the tank
to control the depth of stain
from the surface after 1 to 20 minutes
the staining solution effect desired

KEY DATA

Spreading Date 400 sq ft per
Spreading Rate (lb/acre) 20 lbs
Application

PACKAGE WORK

1-quint, 2-grat and 3-point com.

OLD WOOD STAINS

MAXIMUM BEAUTY OF NATURAL WOODS — **4-17-61**

[illegible]

PENETRATING 1700 the high-oil content means a

the elimination of the word "more" must give them
efficiency and speed... participation gives greater
interest in public... public are in a losing... re-
sulting efforts are possible on hand... will
in it.

COLOR DEPTH CAN BE VARIOUS the amount of press.

...the extent of the economic crisis... the depth of the economic crisis... the extent of the economic crisis... the depth of the economic crisis...

1410 TO 1450 and has structural effects on wood...

...his is drying out... there's no color the sand
...won't cause cracking of the sand there... won't
...it is drying the sand again pattern.

READY TO GO. Just open the container, and you

- ... apply these claims to any type of suspended,
 - ... made ... they can be used to trial pilot also
 - ... and smoking ops great and serious...
 - ... using operators is accomplished simply and
 - ... with above cloth or other common materials
 - ... standard uniform dry for covering or smoking
 - ... about prolonged waiting.

00047

0692

NLI 116473

NOTICE: If the film image is less clear than the notice, it is due to the quality of the document being filmed

131

VARNISH

Exterior Marine Spar

DESCRIPTION

Transparent in glass container. Made from a combination of pure plastic resin and hard oil.

USES

As exterior surface of unpainted material used. May be used on exterior surface of painted material. May be used on exterior surface of painted material. May be used on exterior surface of painted material.

WARNING

Do not use on interior surfaces. Do not use on interior surfaces. Do not use on interior surfaces.

APPLICATION

Brush or spray. Apply a full even coat. Top of may be applied. Apply a full even coat. Top of may be applied. Apply a full even coat. Top of may be applied.

DETAIL DATA

Spreading Rate 200 sq ft per gallon
Drying Time 60 min
Recoating Time 20 min
Appearance High Gloss
Durability Excellent

PACKAGE SIZE

1 gallon, 1 quart, 1 pint and 1/2 pint sizes.

For these points to sell:

VARNISH

Exterior Marine Spar

VISIT HIGH QUALITY made with pure plastic resin and hard oil. Superior finish in the most rapid and economical application. Long life and low cost. Superior finish in the most rapid and economical application. Long life and low cost.

USE ANYWHERE OR ANYTIME this finish is highly recommended for all types of unpainted, painted wood, metal, and structural steel and other buildings. Has the appearance required for top performance on metal. It is unaffected by salt, fresh, and cold water.

CLEAR VARNISH WITH BRILLIANT GLOSS is protective without hiding the surface. Brings out the best appearance of wood color and grain. Its application is easy during application. It is a having superior uniformity of appearance. The pleasing surface resists damage from weathering, prevents, salt spray, the finish remains in place.

UNMATCHED FOR DURABILITY the most rigorous tests under repeated conditions have proved the superiority of Exterior Marine Spar Varnish in comparison with the best-known competitive varnishes of this type. Durability covers many things: the ability of the film to remain intact and fully protective over long periods; resistance to weathering; moisture resistance; the ability to scrub evenly and uniformly to produce first-rate surface for retouching. Exterior Marine Spar Varnish has longer film life, greater protection, and can be maintained easier and at less expense than highly polished competitive coatings.

00047

0693

NLI 116474

NOTICE: if the film image is less clear than this notice, it is due to the quality of the document being filmed

131

VARNISH

Floor & Trim Glass

DESCRIPTION

Transparent high gloss finish...
...resistant to wear and tear.

USES

Interior surfaces...
...resistant to wear and tear.

STAINING

Stains from oil, grease, etc...
...resistant to wear and tear.

APPLICATION

Brush or spray...
...resistant to wear and tear.

TESTING DATA

Spreading Rate...
...resistant to wear and tear.

PACKAGE SIZES

1 gallon, 5 quarts, 1 quart and 1/2 quart sizes.

VARNISH

Floor & Trim Glass

FACE COVER WEATHERING...
...resistant to wear and tear.

SHINE BUT THE BEST ON FLOORS...
...resistant to wear and tear.

TRANSPARENT FINISH...
...resistant to wear and tear.

EXCEPTIONALLY TOUGH...
...resistant to wear and tear.

VARIABLE FINISH...
...resistant to wear and tear.

00047

0894

NLI 116475

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

VARNISH

General Purpose Type

DESCRIPTION

Thompson's is a general purpose varnish for use on a wide variety of surfaces.

USE

For use on wood, metal, and other surfaces. It is applied by brush or spray.

WARNINGS

Do not use on surfaces that are already coated with a similar material. It may cause peeling or cracking.

APPEARANCE

Do not use on surfaces that are already coated with a similar material. It may cause peeling or cracking.

TESTING DATA

Thompson's is a general purpose varnish for use on a wide variety of surfaces. It is applied by brush or spray.

POSSIBLE USES

Thompson's is a general purpose varnish for use on a wide variety of surfaces. It is applied by brush or spray.

-12-

There is no need to worry.

VARNISH

General Purpose Type

GENERAL PURPOSE VARNISH has many properties... It is applied by brush or spray.

HEAVY DUTY VARNISH provides a film with a bright, glossy appearance... It is applied by brush or spray.

TRANSPARENT made to protect natural wood without... It is applied by brush or spray.

POSSIBLE USES This varnish is a barrier to... It is applied by brush or spray.

THICK FILM this is used on floors, furniture... It is applied by brush or spray.

-13-

00047

0695

NLI 116476

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

VARNISH

Water Based Interior

DESCRIPTION

A transparent, water based interior finish for use on wood, metal, and other surfaces.

USES

Interior finish for woodwork, furniture, and other surfaces. It is suitable for use on all types of wood, whether stained or unstained.

ADVANTAGES

Water Based Interior Varnish provides a clear, protective finish for woodwork and furniture. It is easy to apply and dries quickly.

APPLICATIONS

Brush, dip, or sprayed without shaking. Do not stir. After application, the material should be allowed to dry on the surface in a manner which will produce a uniform, full coat.

DETAIL DATA

Spreading Rate 200 sq ft per gallon
Drying Time 45 to 75 minutes
Covering Power One coat
Appearance Clear finish

PACKAGE SIZE

Quart, 1 gallon, 5 gallon and larger sizes.

VARNISH

Water Based Exterior

Water Based Exterior Varnish has a rich, semi-gloss finish. It is suitable for use on all types of wood, whether stained or unstained. It is easy to apply and dries quickly.

TO EASY TO USE: Water Based Exterior Varnish is a ready-to-use product. It is easy to apply and dries quickly. It is suitable for use on all types of wood, whether stained or unstained.

TRANSPARENCY: Water Based Exterior Varnish is a transparent finish. It is suitable for use on all types of wood, whether stained or unstained. It is easy to apply and dries quickly.

LASTING DURABILITY: Water Based Exterior Varnish is a durable finish. It is suitable for use on all types of wood, whether stained or unstained. It is easy to apply and dries quickly.

00047

0696

NLI 116477

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

VARNISH STAINS

DESCRIPTION

Translucent, high gloss, water-resistant, non-yellowing, non-toxic, non-flammable, non-oxidizing, non-corrosive, non-staining, non-damaging to the surface.

USES

For all types of wood, metal, plastic, and other surfaces. Particularly recommended for use on wood surfaces.

APPLICATION

Brush or spray the stain on the surface. Allow to dry. One coat is normally sufficient for most surfaces but an additional coat may be used if desired.

TESTING DATA

Spreading Rate 500 sq ft per 1 qt
Drying Time 15-30 min
Recoating Time 1-2 hrs
Appearance Glossy

PACKAGE SIZES

1 gallon, 1 quart, 1 pint and 1/2 pint sizes.

VARNISH STAINS

DO TWO JOBS AT ONCE - stain and finish in one step. ... stains and finishes wood surfaces in 10 minutes. ... stains and finishes wood surfaces in 10 minutes. ... stains and finishes wood surfaces in 10 minutes.

WANT USE - Use V. on all natural wood surfaces inside and outside. ... stains and finishes wood surfaces in 10 minutes. ... stains and finishes wood surfaces in 10 minutes.

WANT COLORS - color range duplicates the natural wood grain. ... stains and finishes wood surfaces in 10 minutes. ... stains and finishes wood surfaces in 10 minutes.

TRANSPARENT FINISH - doesn't hide the natural character of the wood grain pattern. ... stains and finishes wood surfaces in 10 minutes. ... stains and finishes wood surfaces in 10 minutes.

DURABLE, HIGH GLOSS FINISH - film dries to a hard, glass-like finish. ... stains and finishes wood surfaces in 10 minutes. ... stains and finishes wood surfaces in 10 minutes.

00047

0697

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

WOODCOTE

Clear Finish
1964

DESCRIPTION

A transparent high gloss paint which is used on finished wood work.

USES

Recommended for exterior use on all types of wood and other suitable materials.

WARNING

Do not use on wood which is wet or on any surface of natural wood which is not intended for painting. Do not use on any surface which is to be painted with a different material or to be treated with a preservative which has been applied to the surface.

APPLICATION

Brush or spray. It must be applied to the surface of the wood which is to be painted with a brush or spray. Do not use on any surface which is to be painted with a different material or to be treated with a preservative which has been applied to the surface.

DETAILS

Spreading Rate: 100 sq ft per gallon
Drying Time: 24 hours
Recoating Time: 48 hours
Clear Finish: 1964

PACKAGE SIZE

1 gallon and 5 gallon cans.

WOODCOTE

Clear Finish

It is possible to tell

WOODCOTE UNPAINTED WOOD: The grain of the wood is clearly visible, giving the appearance of natural wood.

WOODCOTE PAINTED WOOD: The grain of the wood is clearly visible, giving the appearance of natural wood.

WOODCOTE UNPAINTED WOOD: The grain of the wood is clearly visible, giving the appearance of natural wood.

WOODCOTE PAINTED WOOD: The grain of the wood is clearly visible, giving the appearance of natural wood.

WOODCOTE UNPAINTED WOOD: The grain of the wood is clearly visible, giving the appearance of natural wood.

WOODCOTE PAINTED WOOD: The grain of the wood is clearly visible, giving the appearance of natural wood.

WOODCOTE UNPAINTED WOOD: The grain of the wood is clearly visible, giving the appearance of natural wood.

00047

0678

NLI 116479

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

WOODCOTE

Redwood Stain

DESCRIPTION
A full color stain which penetrates the wood grain, giving a rich, warm, natural appearance. It is a water-based stain and is non-toxic.

USE
For staining exterior woodwork, such as decks, fences, and outdoor furniture. It is also suitable for interior woodwork, such as floors and walls.

RECOMMENDED FINISH COATS
For increased durability and protection, a clear finish coat should be applied over the stain. Clear finish coats are available in a variety of finishes, including gloss, semi-gloss, and matte.

APPLICATION
Brush or spray the stain onto the wood surface. Allow the stain to penetrate for 15-20 minutes before wiping off the excess. For best results, apply the stain in a thin, even coat.

DETAIL DATA

Spreading Rate 200 sq ft per gallon

200 sq ft per gallon

200 sq ft per gallon

200 sq ft per gallon

200 sq ft per gallon

For the complete list

WOODCOTE

Redwood Stain

ATTRACTIVE REDWOOD COLOR is a rich, warm, natural color that gives wood a beautiful appearance. It is a water-based stain and is non-toxic.

STAINS ALL WOODS this stain can be used on all types of wood, including softwoods and hardwoods. It is also suitable for interior and exterior use.

COLOR IS PERMANENT the stain penetrates the wood grain and is resistant to fading and discoloration. It is also resistant to water and weathering.

MAINTAINS STAIN - pure linseed oil in the stain helps to maintain the wood's natural texture and appearance. It is also resistant to cracking and peeling.

NO APPLICATION PROBLEMS - the stain is easy to apply and does not require special equipment or techniques. It is also suitable for use on a variety of wood surfaces.


00047

0699

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

131

NOTES



PRIMERS,
UNDERCOATERS,
AND
MISCELLANEOUS
PRODUCTS



00047

0700

NLI 116481

NOTICE: if the film image is less clear than this notice, it is due to the quality of the document being filmed

131

ENAMEL UNDERCOAT

701

DESCRIPTION

Enamel Undercoat is a white, non-toxic, water-soluble paint which is suitable for use on all types of surfaces.

USE

As a first coat on interior and exterior surfaces, Enamel Undercoat is recommended for use on all types of surfaces. It is also suitable for use as a second coat on surfaces which have been previously painted with Enamel Undercoat.

RECOMMENDED FINISH COATS

At Durr, Enamel Undercoat is recommended for use on all types of surfaces. It is also suitable for use as a second coat on surfaces which have been previously painted with Enamel Undercoat.

APPLICATION

Brush or spray for preparation. The material should be applied in a uniform coat. If a second coat is desired, wait only a short time before applying the second coat. The amount of material applied should be based on the surface to be painted.

DETAILS DATA

Spreading Rate: 400-500 sq. ft. per gal.
Drying Time: 1 hour
Touching Time: 24 hours
Appearance: 1st

PACKAGE SIZE

1 gallon, 5 quart, 1 quart and 1/2 quart sizes.

ENAMEL UNDERCOAT

SPECIAL PURPOSE COATING - As good as any for use on all types of surfaces. It is also suitable for use as a second coat on surfaces which have been previously painted with Enamel Undercoat.

IDEAL FOR UNPAINTED WOODS - Enamel Undercoat is the ideal for unpainted woods. It is also suitable for use on all types of surfaces. It is also suitable for use as a second coat on surfaces which have been previously painted with Enamel Undercoat.

SUPERIOR DURABILITY - Enamel Undercoat is the ideal for unpainted woods. It is also suitable for use on all types of surfaces. It is also suitable for use as a second coat on surfaces which have been previously painted with Enamel Undercoat.

ODORLESS-TYPE COATING - Enamel Undercoat is the ideal for unpainted woods. It is also suitable for use on all types of surfaces. It is also suitable for use as a second coat on surfaces which have been previously painted with Enamel Undercoat.

WORKS EASILY - Enamel Undercoat is the ideal for unpainted woods. It is also suitable for use on all types of surfaces. It is also suitable for use as a second coat on surfaces which have been previously painted with Enamel Undercoat.

00047

0710

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

EXTERIOR PRIMER

010

DESCRIPTION

A long dry, non-toxic, white primer which adheres to a variety of surfaces and provides a uniform base for painting.

USE

Interior and exterior surfaces of wood, metal, masonry, and other surfaces which are to be painted. Recommended for use on all surfaces except those which are already painted.

RECOMMENDED THIN COATS

An Dobb Dry Mix Primer, Such & T & C, Four Primer and White & Grey Primer, recommended as finish coats over Exterior Primer.

APPLICATION

Brush or spray 12-14 square feet per gallon. When painting, thoroughly rough, porous surfaces, a liberal amount of material should be applied. No more than is absolutely necessary.

STORAGE

Shedding Rate 100 to 200 sq ft per gallon
Drying Time 1 hour
Breathing Time 1 hour
Appearance 100 to 200 sq ft per gallon

PACKAGE SIZE

Galton, 1-gallon and 5-gallon cans.

These points to sell

EXTERIOR PRIMER

HAIR AND POINTS All points of sale and all points of sale which are not in the same category as the other points of sale.

HOW PERFORMANCE ON THIN COATS 10-12 sq ft per gallon. The primer is a good base for all thin coats. It is a good base for all thin coats.

HOW TO USE Exterior Primer contains a high percentage of fresh, dry, white sand. It is a good base for all thin coats. It is a good base for all thin coats.

EXCELLENT DECORATION Exterior Primer is a good base for all thin coats. It is a good base for all thin coats.

HOW TO USE Exterior Primer is a good base for all thin coats. It is a good base for all thin coats.

HOW TO USE Exterior Primer is a good base for all thin coats. It is a good base for all thin coats.

00047

01100

NLI 116483

NOTICE: If the film image is less clear than the notice, it is due to the quality of the document being filmed

131

FOUNDATION UNDERCOAT

000

DESCRIPTION

Foundation Undercoat is a high quality, low viscosity, fast drying, and highly resistant to abrasion and chemical attack.

USE

Foundation Undercoat is used as a primer on all surfaces of wood and metal for the application of all types of paint and varnish.

RECOMMENDED PRIMER COATS

For superior results on all surfaces, use one coat of Foundation Undercoat followed by one coat of Color Guard or other high quality paint.

APPLICATION

Brush or spray. Best results are obtained when the surface is clean and free of oil and dirt. Allow to dry before applying the next coat.

DETAIL DATA

Spreading Rate: 40-50 sq ft per gallon
Drying Time: 30-60 minutes
Recoat Time: 2-4 hours
Appearance: Glossy

PACKAGE SIZE

1 gallon, 1 quart and 1 pint cans.

It is the most powerful primer.

FOUNDATION UNDERCOAT

FOUNDATION UNDERCOAT is a high quality, low viscosity, fast drying, and highly resistant to abrasion and chemical attack.

FOUNDATION UNDERCOAT is used as a primer on all surfaces of wood and metal for the application of all types of paint and varnish.

FOUNDATION UNDERCOAT is a high quality, low viscosity, fast drying, and highly resistant to abrasion and chemical attack.

FOUNDATION UNDERCOAT is a high quality, low viscosity, fast drying, and highly resistant to abrasion and chemical attack.

FOUNDATION UNDERCOAT is a high quality, low viscosity, fast drying, and highly resistant to abrasion and chemical attack.

FOUNDATION UNDERCOAT is a high quality, low viscosity, fast drying, and highly resistant to abrasion and chemical attack.

00047

07073

NLI 116484

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

METAL PRIMER

030

DESCRIPTION

A special metal primer which is used to prepare metal surfaces for painting. It is a white, non-toxic, and non-flammable liquid.

USES

Interior and exterior metal surfaces, including steel, iron, and aluminum. It is used to prepare metal surfaces for painting.

RECOMMENDED THIN COATS

Two thin coats of Metal Primer should be applied to all metal surfaces. The first coat should be applied to the surface and the second coat should be applied after the first coat has dried.

APPLICATION

Brush or spray for best results. Use Metal Primer in the container. If shaking is desired, shake the container well before use. Use only a small amount of primer.

DETAIL DATA

Spreading Rate: 400 sq ft per gal
Drying Time: 40 hours
Recoating Time: 10 hours
Corrosion Resistance: Excellent

PACKAGE INFO

1 gallon, 1 quart and 1 pint cans.

It's the way you use it.

METAL PRIMER

SACRIFICIAL CORROSION RESISTANCE made with a special combination of zinc and iron oxides. It is a white, non-toxic, and non-flammable liquid. It is used to prepare metal surfaces for painting.

FAST DRYING speed of dry makes that of quality. It is a white, non-toxic, and non-flammable liquid. It is used to prepare metal surfaces for painting.

CHALK RESISTANCE prevents use in areas where chalk is used. It is a white, non-toxic, and non-flammable liquid. It is used to prepare metal surfaces for painting.

ADHESION RESISTANCE primer does not peel off all metal, even when surface may be slightly rusted. It is a white, non-toxic, and non-flammable liquid. It is used to prepare metal surfaces for painting.

BEST COVERAGE - easy brushing material... high being covered by surface, superior film... resistance to surface corrosion damage per gallon.

00047

07104

NLI 116485

NOTICE: If the film image is less clear than the notice, it is due to the quality of the document being filmed

131

NALPREP 819

DESCRIPTION

For general - exterior masonry surfaces and for use with a processed white and colored pigments. It is a dry mix.

USE

To prepare premixes of colored masonry surfaces and for use with a processed white and colored pigments. It is a dry mix.

RECOMMENDED MIXTURES

For Bulk Dry Mixcrete for surfaces where texture has been applied on a flat coat. The off-white mix is the perfect answer to decorating exterior walls of a brick concrete under block and similar materials.

APPLICATION

Brush or roller. Use as received in the container. If desired, a mixture can be made of small amount of mineral spirits or kerosene per gallon.

COVER DATA

Spreading Rate 100-200 sq ft per gallon
Curing Time Overnight
Drying Time 24 hours

*Values according to degree of roughness of surface

COVERAGE DATA

Options and 1 gallon can.

For these products see 131.

NALPREP

GENERAL INFORMATION: Bulk dry mixcrete and for use with a processed white and colored pigments. It is a dry mix.

PREPARATION AND USE: Nalprep is a penetrating, light colored masonry - rendering a unique "stone like" pattern of texture - which results in a dry through layer of dry masonry particles and returns them to the original masonry surface. It is a dry mix.

USES AND ADVANTAGES: Nalprep masonry surface rendering and masonry repair work. It is a dry mix.

COVER INFORMATION: Nalprep dries overnight. Bulk mix can be applied in just 24 hours. It is a dry mix.

00047

U 1115

13

2141

DESCRIPTION

1. The first part of the document is a list of names and addresses, which appears to be a directory or a list of contacts. The names are written in a cursive script, and the addresses are listed below them.

1999

1. The first part of the document is a list of names and addresses, which are arranged in a grid-like format. The names are written in a stylized, cursive script, and the addresses are written in a more formal, printed font. The list is organized into columns, with names in the first column and addresses in the second column.

DISCONTINUOUS INFLUENCE

the State of New York and the State of New Jersey
and the State of New York and the State of New Jersey
and the State of New York and the State of New Jersey

Abstract

Each roller or tube if running is desirable, as
small amount of large water. Do not use any of
substance change or other (10-11)

STATE DATA

Drying Time 20 minutes to 2 hours, depends on humidity and temp.

Accounting Terms

PAGE 1136

PAGE 43 12500

1 system and 1 client have

It is the responsibility of all

PRIMEFAST SEALER

[illegible][illegible]

ALL THE INFORMATION provided contained herein is for the use of the recipient only and is not to be distributed outside the recipient's organization. It is the policy of the FBI to protect the confidentiality of information received from sources and to prevent the disclosure of such information to unauthorized persons. It is the responsibility of the recipient to ensure that the information is not disclosed to unauthorized persons.

WARNING: Flammable liquid can be used anywhere
anywhere while using equipment or after... But
for closed areas.

INCREASED FOR WAGE GOALS President Niles gives
workers waiting action on high-priority matters...
trade plans over time...up to produce a
month's more action for each unit.

MAN BE STARTED too with stick they leave Tinsone
... looking around out of stick trips stick and
back today.

NEW 1976 Here is a modern, exciting setting... plain
suits and center stage up to date and other equipment.

00047

0706

00047

NLJ 116489

ALL-PURPOSE ENAMEL
191

Identify the author of the following text. The author is a well-known figure in the field of psychology.

[Faint, illegible text]

the State of Louisiana in the year 1900 and the
the State of Louisiana in the year 1900 and the

DECLASSIFICATION

Should no longer be reviewed in the future. The
information contained herein is not to be released.

| | |
|-------------------|--------------------|
| BASIC DATA | |
| Issuing Org | 000 00 00 00 00 00 |
| Drying Date | 6-8 00 |
| Shipping Time | 24 hr |
| Apparatus | High gl |

1. 1000 2. 1000 3. 1000

It is the no. printed on the

MEMORANDUM FOR THE RECORD: The above information was obtained from the files of the Department of the Interior, Bureau of Land Management, and is being furnished to you for your information.

performance cannot be an advantage associated with
the quality of work. The quality of work is
not a result of the quality of the performance
of the performance of the work. The quality of the
work is a result of the quality of the performance
of the performance of the work.

SUSAN FAN stands up to her husband ... takes about
 a third of going to work ... highly resistant to
 changes ... laughs at work time.

...had been in the
... ..
... ..

[illegible]

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

Ready Sheet ALUMINUM PAINT M-61

DESCRIPTION

Orange, thick paste of 1 pint per 1 sq ft. ...
... aluminum paint incorporated into a ...
... type vehicle

USE

For maintenance work on ...
... surfaces and other surfaces that are ...
... and heavily in contact with

PREPARE

Surf surfaces should be ...
... surfaces should be ...
... surfaces should be ...
... surfaces should be ...

APPLICATION

Brush or spray according to the area to be covered ...
... surfaces in the ...
... surfaces in the ...

DETAIL DATA

Spreading Rate ... 600 sq ft per quart
Drying Time ... 60 hours
Drying Time ... 60 hours
Drying Time ... 60 hours

PACKAGE DATA

1 gallon, 1 quart and 1 pint cans.
- 100 -

I'm the product to use.

ALUMINUM PAINT

READY-MIXED. Should be stored in airtight ...
... containers ...
... containers ...

USE ANYWHERE. It insulates the surface and ...
... surfaces ...
... surfaces ...

DURABLE. High metal content. ...
... surfaces ...
... surfaces ...

MAINTENANCE. Thin and leveling characteristics ...
... surfaces ...
... surfaces ...

SAVES MONEY. Does as much in a few hours ...
... surfaces ...
... surfaces ...

00047

07107

NLI 116490

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

BARN & ROOF PAINT

DESCRIPTION

Great exterior finish. Made from a special formula of pigments and binders. It is a heavy body paint.

USES

Exterior surfaces and roofs of buildings. For the following: barns and other buildings, etc.

PAINTING

For the best results, use a brush or roller on surfaces which exhibit a rough texture. Use Barn & Roof Paint in one coat of application. It is a heavy body paint and gives a good finish.

APPLICATION

Brush or spray for best results. A thick coat should be used. It is recommended that the surface be primed if it is new. If it is old, it should be cleaned and sanded.

DETAILS DATA

Spreading rate 100 sq. ft. per gallon
Drying time 24 hours
Recoating time 24 hours
Durability Excellent

PACKAGING DATA

5 gallon, 1 gallon and 1 quart cans.

For these products see

BARN & ROOF PAINT

EXCELLENT AND COLOR - This is a heavy body paint which is made from a special formula of pigments and binders. It is a heavy body paint and gives a good finish.

EXCELLENT COLOR RETENTION - This is a heavy body paint which is made from a special formula of pigments and binders. It is a heavy body paint and gives a good finish.

EXCELLENT FINISH - This is a heavy body paint which is made from a special formula of pigments and binders. It is a heavy body paint and gives a good finish.

EXCELLENT DURABILITY - This is a heavy body paint which is made from a special formula of pigments and binders. It is a heavy body paint and gives a good finish.

EXCELLENT ECONOMY - This is a heavy body paint which is made from a special formula of pigments and binders. It is a heavy body paint and gives a good finish.

00047

0710

NLI 116491

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

LATEX TINTERS

DESCRIPTION

A series of 11 light to dark colored pigments of uniform degree of color intensity and composition. 10 specially prepared white 10 colors

USES

Recommended specifically for tinting latex paint. Also for tinting oil and enamel paints. Compatible with all commercial latex paints now marketed for interior and exterior use

TINTING PROCEDURE

Add tinters directly to white or ready mixed latex paint of all types. Do not use more than 8 ounces of tinting material per gallon of paint. Do not attempt to tint oil or enamel paints with latex tinters.

PACKAGE SIZE

1 quart and 1/2 pint cans

Note: When tinting exterior and exterior paints of the oil or enamel type use latex tinting color. These tinting color materials consist of pure color pigments dispersed in a wet and oily vehicle, and are available in 17 colors

For these points to sell

LATEX TINTERS

HIGH DRIVING STRENGTH all pure colors... pigments selected for this use are tested for tinting ability and are designed to be dispersed... a little latex tinting goes a long way... no extra equipment or labor for tinting material is needed to give a job.

COMPLETE COMPATIBILITY WITH LATEXES can be used readily with any of the acrylic, polyvinyl acetate, or butadiene-styrene latex paint formulations on the market today... compatible also with any modification of the three main latex categories... do not affect characteristic color of latex... do not affect dry, application or other properties of paints.

COMPLETE COLOR RANGE includes all basic colors needed to obtain an infinite variety of hues... colors will not fade... do not require special drying time... remain unchanged in spite of repeated exposure.

FASTER DISPERSION Latex Tinters are made especially for tinting latex base paints... for superior dispersion... "universal" tinters are used for this purpose... with daily use grinding of pigments and "run" is being during manufacture produce tinting materials which are uniform and free from lumps... small pigment particles are used for tinting... rapid and complete dispersion of pigments... complete tinting accomplished in seconds... tinting effort is lower... no situation to cause streaking when tinted paint is used.

UNPARALLELED STABILITY pigments remain dispersed in paints... no settling... no gelling or thickening on after storage in latex paints with other types of tinters... extensive laboratory testing has proved that latex paints tinted with latex tinters remain unblemished indefinitely.

00047

NLI 116492

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

PASTE WOOD FILLER

25-11

DESCRIPTION

A heavy paste made with glue and wood shavings.

USE

To use in preparing natural wood of the ... for subsequent finishing and the ... for use in preparation with ...

RECOMMENDED STAINS AND FINISH COATS

With the ... stain ... and ... for the ...

APPLICATION

The material should be reduced with ... to produce a ...

INITIAL DATA

Color ...
Setting Time ...
Drying Time ...

PACKAGE SIZES

1 gallon, 1 quart and 1 pint cans.

For these points to sell.

PASTE WOOD FILLER

PASTE WOOD GRAM ... to prepare ...

NEUTRAL COLOR ... to all types of woods ...

GRANULAR ... to be ...

FASTER DRYING ... to produce ...

EASY TO USE ... to add ...

00047

0712

NLI 116493

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

131

SCREEN ENAMEL

20.90

REVISIONS

DISCUSSION

4142

[illegible]

APPLICATION

APPLICATION

Each subject or animal application designed for such a purpose. Between [] and [] is indicated the subject's name for use in labeling without changing the mark. It should be applied as received. If staining is desired, a small amount of pure hydrogen peroxide or mineral spirits may be used.

ESTIMATED DATA

Spreading Rate 200 400 up to 600 gal/acre
Actual spread rate
Spreading Time
Spreading Time when used as liquid
Comments

Abstract

1-10-11-12-13-14-15-16-17-18-19-20-21-22-23-24-25-26-27-28-29-30-31-32-33-34-35-36-37-38-39-40-41-42-43-44-45-46-47-48-49-50-51-52-53-54-55-56-57-58-59-60-61-62-63-64-65-66-67-68-69-70-71-72-73-74-75-76-77-78-79-80-81-82-83-84-85-86-87-88-89-90-91-92-93-94-95-96-97-98-99-100-101-102-103-104-105-106-107-108-109-110-111-112-113-114-115-116-117-118-119-120-121-122-123-124-125-126-127-128-129-130-131-132-133-134-135-136-137-138-139-140-141-142-143-144-145-146-147-148-149-150-151-152-153-154-155-156-157-158-159-160-161-162-163-164-165-166-167-168-169-170-171-172-173-174-175-176-177-178-179-180-181-182-183-184-185-186-187-188-189-190-191-192-193-194-195-196-197-198-199-200-201-202-203-204-205-206-207-208-209-210-211-212-213-214-215-216-217-218-219-220-221-222-223-224-225-226-227-228-229-230-231-232-233-234-235-236-237-238-239-240-241-242-243-244-245-246-247-248-249-250-251-252-253-254-255-256-257-258-259-260-261-262-263-264-265-266-267-268-269-270-271-272-273-274-275-276-277-278-279-280-281-282-283-284-285-286-287-288-289-290-291-292-293-294-295-296-297-298-299-300-301-302-303-304-305-306-307-308-309-310-311-312-313-314-315-316-317-318-319-320-321-322-323-324-325-326-327-328-329-330-331-332-333-334-335-336-337-338-339-340-341-342-343-344-345-346-347-348-349-350-351-352-353-354-355-356-357-358-359-360-361-362-363-364-365-366-367-368-369-370-371-372-373-374-375-376-377-378-379-380-381-382-383-384-385-386-387-388-389-390-391-392-393-394-395-396-397-398-399-400-401-402-403-404-405-406-407-408-409-410-411-412-413-414-415-416-417-418-419-420-421-422-423-424-425-426-427-428-429-430-431-432-433-434-435-436-437-438-439-440-441-442-443-444-445-446-447-448-449-450-451-452-453-454-455-456-457-458-459-460-461-462-463-464-465-466-467-468-469-470-471-472-473-474-475-476-477-478-479-480-481-482-483-484-485-486-487-488-489-490-491-492-493-494-495-496-497-498-499-500-501-502-503-504-505-506-507-508-509-510-511-512-513-514-515-516-517-518-519-520-521-522-523-524-525-526-527-528-529-530-531-532-533-534-535-536-537-538-539-540-541-542-543-544-545-546-547-548-549-550-551-552-553-554-555-556-557-558-559-560-561-562-563-564-565-566-567-568-569-570-571-572-573-574-575-576-577-578-579-580-581-582-583-584-585-586-587-588-589-590-591-592-593-594-595-596-597-598-599-600-601-602-603-604-605-606-607-608-609-610-611-612-613-614-615-616-617-618-619-620-621-622-623-624-625-626-627-628-629-630-631-632-633-634-635-636-637-638-639-640-641-642-643-644-645-646-647-648-649-650-651-652-653-654-655-656-657-658-659-660-661-662-663-664-665-666-667-668-669-670-671-672-673-674-675-676-677-678-679-680-681-682-683-684-685-686-687-688-689-690-691-692-693-694-695-696-697-698-699-700-701-702-703-704-705-706-707-708-709-710-711-712-713-714-715-716-717-718-719-720-721-722-723-724-725-726-727-728-729-730-731-732-733-734-735-736-737-738-739-740-741-742-743-744-745-746-747-748-749-750-751-752-753-754-755-756-757-758-759-760-761-762-763-764-765-766-767-768-769-770-771-772-773-774-775-776-777-778-779-780-781-782-783-784-785-786-787-788-789-790-791-792-793-794-795-796-797-798-799-800-801-802-803-804-805-806-807-808-809-810-811-812-813-814-815-816-817-818-819-820-821-822-823-824-825-826-827-828-829-830-831-832-833-834-835-836-837-838-839-840-841-842-843-844-845-846-847-848-849-850-851-852-853-854-855-856-857-858-859-860-861-862-863-864-865-866-867-868-869-870-871-872-873-874-875-876-877-878-879-880-881-882-883-884-885-886-887-888-889-890-891-892-893-894-895-896-897-898-899-900-901-902-903-904-905-906-907-908-909-910-911-912-913-914-915-916-917-918-919-920-921-922-923-924-925-926-927-928-929-930-931-932-933-934-935-936-937-938-939-940-941-942-943-944-945-946-947-948-949-950-951-952-953-954-955-956-957-958-959-960-961-962-963-964-965-966-967-968-969-970-971-972-973-974-975-976-977-978-979-980-981-982-983-984-985-986-987-988-989-990-991-992-993-994-995-996-997-998-999-1000-1001-1002-1003-1004-1005-1006-1007-1008-1009-1010-1011-1012-1013-1014-1015-1016-1017-1018-1019-1020-1021-1022-1023-1024-1025-1026-1027-1028-1029-1030-1031-1032-1033-1034-1035-1036-1037-1038-1039-1040-1041-1042-1043-10

I'm the president for all -

SCREEN ENAMEL

[illegible]

PREVENTS RUST AND CORROSION also fully protects metal... from having to keep away rusting elements... stops staining of surface in both warm and cold.

WONT CLO SCREEN WITH specially formulated for
best work. covered with soft and works into
much easier when spread over and comes... things
tightly and uniformly to each other in elements...
don't off up onto in between.

TOUGH, HARD MAN high class him friends were and
wealth... birds don't... smooth him won't damage
fabric of costume and despite blows against street.

REMARKS: Light, one-piece film splits into two... sometimes of 3000 corrosive water run-off during rainy weather... film has no water-soluble materials to be washed away by run-off.

1998

00047

0713

NLI 116494

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

131

NOTES

NOTES

00047

0714

NLI 116495

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

131

NOTES

00047

0715