


Weil-McLain Company

Manufacturing Division: Michigan City, Ind. and Erie, Pa.


General Offices: 641 W. Lake Street, Chicago

NEW YORK OFFICES: 501 Fifth Avenue


Prompt Weil-McLain Boiler and Radiator service is made conveniently available through local stocks carried by Weil-McLain Distributors in most of the important distributing centers.



**New All-Fuel Boilers
No. 67 and No. 77**
Conversion type boilers with insulated enameled jacket. For hand or automatic firing. Connected Load Ratings: Steam 300 to 950 sq ft, Water 480 to 1,520 sq ft.



**No. 78 Boiler
for Automatic Firing**
Boiler has insulated enameled de luxe jacket. Front or rear jacket extension available. Connected Load Ratings: Steam 400 to 1,030 sq ft, Water 640 to 1,650 sq ft.




**"RO Series" Boiler
for Automatic Firing**
Jacketed and insulated round boiler for small homes. Connected Load Ratings: Steam 420 and 520 sq ft, Water 630 and 790 sq ft.




Square-Type Boilers
Sectional boilers for larger installations. Complete range of sizes. Connected Load Ratings: Steam 650 to 9,300 sq ft, Water 1,050 to 14,900 sq ft.



Self-Feed Boiler
Magazine type boiler for small inexpensive sizes hard coal or coke. Connected Load Ratings: Steam 240 to 785 sq ft, Water 385 to 1,260 sq ft.




Junior Radiators
Occupy 40 per cent less space than conventional radiators of same rating. 3-tube, 3 $\frac{3}{8}$ in. wide; 4-tube, 4 $\frac{1}{8}$ in. wide; 5-tube, 5 $\frac{1}{4}$ in. wide; 6-tube, 6 $\frac{1}{8}$ in. wide.



Concealed Raydiant



Partially Recessed



Cabinet Raydiant


Raydiant is a convector type all cast iron radiator made in Concealed, Partially Exposed and Cabinet Types. Raydiant Radiators, however, differ from conventional convectors in that they supply not only convected heat but also sun-like radiant warmth from their heat radiating "live" panel front. A second important advantage is their ability to hold heat longer. This helps increase the comfort of (on and off) automatic heating and makes mixed installation of Raydiant and standard radiation practicable.

American Gas Products


Division of American Radiator Company

40 West 40th Street, New York, N. Y.

Gas Boilers for Hot Water . . . Steam and Vapor Heating . . . Automatic Hot Water Storage Heaters . . . Air Conditioners . . . Gas Fired Steam Radiators



Empire Ideal

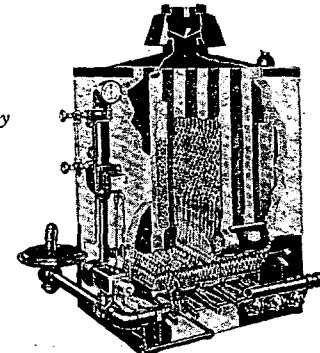

Standard Ideal

Approved by
A. G. A. Laboratory
for Steam, Vapor
or Hot Water
Heating Systems.
Ratings Below.

Specifications for Empire and Standard Ideal Gas Boilers

STEAM BOILERS					WATER BOILERS					
Steam Boiler Number	A.G.A. Steam Rating Sq. Ft.	Supplies Sq. Ft. Direct C.I. Radiation	No. and Size of Tappings		Water Boiler Number	A.G.A. Water Rating Sq. Ft.	Supplies Installed		No. and Size of Tappings	
			Supply In.	Return In.			Gravity	Accelerated	Supply In.	Return In.
0-GS-4	270	171	2-2½	1-1½	1-GA-4	210	126	131	2-1½	2-1½
0-GS-5	360	231	2-2½	1-1½	1-GA-5	280	167	175	2-1½	2-1½
0-GS-6	450	291	2-2½	1-1½	1-GA-6	350	210	220	2-1½	2-1½
0-GS-7	540	357	2-2½	1-1½	1-GA-7	420	253	265	2-1½	2-1½
0-GS-4-E	255	161	1-3	1-1½	2-GA-4	420	253	265	1-2½	1-2½
0-GS-5-E	340	217	1-3	1-1½	2-GA-5	560	342	359	1-2½	1-2½
0-GS-6-E	425	275	1-3	1-1½	2-GA-6	700	434	455	1-2½	1-2½
0-GS-7-E	510	336	2-3	1-1½	2-GA-7	840	527	554	1-2½	1-2½
0-GS-9-E	680	460	2-3	1-1½	4-GA-9	1120	724	761	2-2½	2-2½
0-GS-11-E	850	592	2-3	1-1½	4-GA-11	1400	931	980	2-2½	2-2½
1-GS-4	610	408	2-4	2-4	4-GA-13	1680	1149	1215	2-2½	2-2½
1-GS-5	775	533	2-4	2-4	1-GW-4	980	624	656	2-4	2-4
1-GS-6	940	666	2-4	2-4	1-GW-5	1240	810	853	2-4	2-4
1-GS-7	1105	792	2-4	2-4	1-GW-6	1500	1007	1063	2-4	2-4
1-GS-8	1270	934	2-4	2-4	1-GW-7	1770	1222	1294	2-4	2-4
1-GS-9	1435	1055	2-4	2-4	1-GW-8	2030	1410	1495	2-4	2-4
1-GS-10	1600	1176	2-4	2-4	1-GW-9	2300	1597	1691	2-4	2-4
1-GS-11	1765	1298	2-4	2-4	1-GW-10	2560	1778	1882	2-4	2-4
4-GS-6	2000	1471	2-6	2-5	1-GW-11	2820	1958	2074	2-4	2-4
4-GS-7	2400	1765	2-6	2-5	4-CW-6	3200	2222	2353	2-6	2-5
4-GS-8	2800	2059	2-6	2-5	4-CW-7	3840	2667	2824	2-6	2-5
4-GS-9	3200	2353	2-6	2-5	4-CW-8	4480	3111	3294	2-6	2-5
4-GS-10	3600	2647	2-6	2-5	4-CW-9	5120	3555	3765	2-6	2-5
4-GS-11	4000	2941	2-6	2-5	4-CW-10	5760	4000	4235	2-6	2-5
4-GS-13	4800	3529	4-6	3-5	4-CW-11	6400	4444	4706	2-6	2-5
4-GS-15	5600	4118	4-6	3-5	4-CW-13	7680	5333	5647	4-6	3-5
4-GS-17	6400	4706	4-6	3-5	4-CW-15	8960	6222	6588	4-6	3-5
4-GS-19	7200	5294	4-6	3-5	4-CW-17	10240	7111	7529	4-6	3-5
4-GS-21	8000	5882	4-6	3-5	4-CW-19	11520	8000	8471	4-6	3-5
4-GS-22	8400	6176	6-6	4-5	4-CW-21	12800	8889	9412	4-6	3-5
4-GS-25	9600	7059	6-6	4-5	4-CW-22	13440	9333	9882	6-6	4-5
4-GS-28	10800	7941	6-6	4-5	4-CW-25	15360	10666	11294	6-6	4-5
4-GS-31	12000	8824	6-6	4-5	4-CW-28	17280	12000	12706	6-6	4-5
4-GS-33	12800	9412	8-6	5-5	4-CW-31	19200	13333	14118	6-6	4-5
4-GS-37	14400	10588	8-6	5-5	4-CW-33	20480	14222	15059	8-6	5-5
4-GS-41	16000	11765	8-6	5-5	4-CW-37	23040	16000	16941	8-6	5-5
					4-GW-41	25600	17778	18824	8-6	5-5

All Boilers except Type 4-G and Nos. 1-GS or W-11 are available in either Standard or Empire Ideal models.

(See also Page 900)