One U. S. Standard
Gallon

520 · IVORY

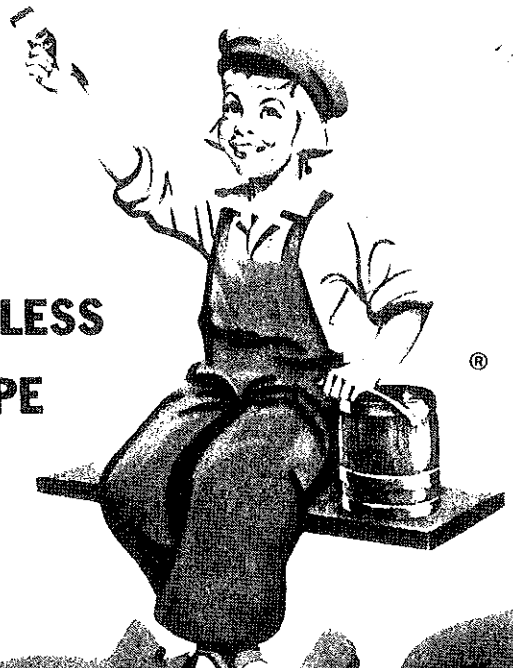

ODORLESS
TYPE

Dutch Boy®

Satin Eggshell

ALKYD SEMI-GLOSS ENAMEL

N13859

0000-NLI-000020583

Dutch Boy SATIN EGGSHELL

ALKYD SEMI-GLOSS ENAMEL

Easily Cleaned...Water Resistant...Semi-Gloss Finish

Dutch Boy Satin Eggshell—a modern, semi-gloss enamel for interior walls, woodwork and cabinets. This tough, durable finish is resistant to soiling, easy to clean and can be washed repeatedly. It is an ideal finish for kitchens, bathrooms and interior trim, on plaster, wallboard, wood or metal surfaces.

Follow Directions—STIR WELL—No Thinner Needed

Dutch Boy Satin Eggshell is ready for use after thorough stirring and ordinarily requires no thinning. If thinning is necessary, use only a small amount of mineral spirits, preferably odorless type if available.

Be certain the surface to be painted is clean and dry—free from wax, grease, oil, dirt and dust.

Apply with brush or roller at a rate of 500 square feet per gallon.

NEW WORK: Unpainted plaster, wallboard, etc. should be primed with Dutch Boy 040-Wall Primer & Sealer or 72-01 Primefast Sealer according to label directions. New plaster must be allowed to age and dry thoroughly before applying priming coat.

On unpainted woodwork, doors, cabinets, etc., first apply Dutch Boy Enamel Undercoat according to label directions.

After the primer or undercoat is thoroughly dry and hard, apply a coat of Dutch Boy Satin Eggshell.

PREVIOUSLY PAINTED SURFACES: On surfaces previously painted with gloss or semi-gloss paints, one coat of Dutch Boy Satin Eggshell is usually sufficient, if the old paint is in good condition. The old surface should be cleaned and sanded lightly, and patched cracks or repaired areas should be first spot coated with Dutch Boy Satin Eggshell.

If repairs and patches are extensive, or if the surface is porous or in poor condition, remove all loose and scaling paint and follow the directions given for new work.

COMPOSITION OF PAINT BY WEIGHT

PIGMENT 40.3%

Titanium Dioxide	50.8%
Titanium Calcium	23.1%
Calcium Carbonate	12.3%
Magnesium Silicate	13.8%
*And Tinting Materials	

VEHICLE 59.7%

Soya Alkyd Resin	42.9%
Liquid Drier	5.0%
Mineral Spirits	52.1%

*Less than 5% of the pigment.

CAUTION—COMBUSTIBLE: Keep away from heat and open flame. Use with adequate ventilation. Avoid breathing of vapor mist or prolonged contact with skin. Close can after using. **KEEP OUT OF REACH OF CHILDREN.**

NATIONAL LEAD COMPANY

GENERAL OFFICES: NEW YORK, NEW YORK

®

0000-NLI-00020584