

ONE

GALLON


O'BRIEN'S

75⁰⁰

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

BUD GREEN

symphonic colors

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALTIMORE, MARYLAND

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work — One coat will do an excellent job.
- 2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

- 1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil.
- 2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

THE O'BRIEN CORPORATION
SOUTH BEND, IND. OKLAHOMA CITY, OKLA.
BALTIMORE, MD. SAN FRANCISCO, CALIF.
LOS ANGELES, CALIF.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles *

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY


CAUTION! COMBUSTIBLE

KEEP AWAY FROM HEAT AND OPEN FLAME. CONTAINS LEAD OR OTHER COMPOUNDS HARMFUL IF EATEN. Do not apply on any interior surfaces where it may be in contact with toys, cribs and other furniture which might be chewed by children. Avoid contact with food, clothing, or any material which may be in contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use. Keep out of reach of children. USE WITH ADEQUATE VENTILATION.

"75" EGGSHELL - END GREEN	
Platinum Oxide	7.77%
Chromium Oxide	11.55%
Iron Oxide	32.24%
Starch	100.00%
Vehicle	17.88%
Lead Oxide	31.15%
Iron Oxide	10.88%
Aluminum Oxide	50.00%
Aluminum Oxide & Drier	100.00%

RECEIVED
REC'D. NO. 4-21-60
DATE

ONE



O'BRIEN'S

"75"

EXTERIOR EGGSHELL
PAINT

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

CORAL CLOUD

"symphonic colors"

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALTIMORE, MARYLAND

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work — One coat will do an excellent job.
- 2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil.

2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

THE O'BRIEN CORPORATION
SOUTH BEND, IND. OKLAHOMA CITY, OKLA.
BALTIMORE, MD. SAN FRANCISCO, CALIF.
LOS ANGELES, CALIF.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles*

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY
CAUTION! COMBUSTIBLE

KEEP AWAY FROM HEAT
AND OPEN FLAME
CONTAINS LEAD OR OTHER COM-
POUNDS HARMFUL IF EATEN


Do not apply on any interior surfaces
of a building or a place used for the
care of children. Do not use on
toys, cribs and other furniture which
might be chewed by children. Avoid
breathing vapor or spray mist and pre-
vent contact with skin. Wash face
thoroughly after handling and before eating
or smoking. Keep container closed when
not in use. Keep out of reach of children.
USE WITH ADEQUATE VENTILATION.


"75" EXTERIOR EGGSHELL HOUSE PAINT - COAL CLOUD	45.99%
Primer	23.33%
10% Lead Zinc Oxide	23.33%
Fillers	7.35%
Vehicle	54.01%
Boat Linseed Oil	12.50%
Boat Bone A-Lyd Resin	2.50%
Boat Bone A-Lyd Resin	3.50%
Mineral Spirits & Drier	35.51%
	100.00%

Less than 5% Tinting Colors Added

REGISTERED
REGD. No. 9-24-60
DATE

ONE



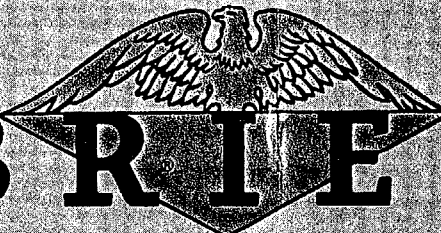
O' B R I E N ' S

75

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

FLAME

"symphonic colors"

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALTIMORE

49 TOC 001456

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

1/2" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

**Wood Shingles, Siding, Trim and
Unglazed Asbestos Shingles (Previously Painted)**

1 Coat Work — One coat will do an excellent job.

Wood Shingles, Siding, Trim (New, Unpainted)
1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil.
2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

THE O'BRIEN CORPORATION
SOUTH BEND, IND.
BALTIMORE, MD.
OKLAHOMA CITY, OKLA.
SAN FRANCISCO, CALIF.
LOS ANGELES, CALIF.

REGISTERED
REC'D. No. RR 513
DATE 9-24-60

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles*

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

***NOTE:** "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

**DO NOT TAKE INTERNALLY
CAUTION! COMBUSTIBLE
KEEP AWAY FROM HEAT**

AND OPEN FLAME
POUNDS LEAD OR OTHER COM-
POUNDS HARMFUL IF EATEN

Do not apply on any interior surfaces of a dwelling, or place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use. Keep out of reach of children.

USE WITH ADEQUATE VENTILATION.

75 EXTENSIO EGGSHELL - FLAME	
Waxes	65.98%
Triphenyl Phosphate	32.52%
Polychloro Benzene	13.40%
Polychloro Orange	28.13%
Zinc Oxide	4.74%
Tin Indigo Red	24.99%
Silicates	100.00%
Whitex	84.02%
Modified Soya A 2yd Basis	5.44%
Raw Linseed Oil	7.08%
Heat Treated Linseed Oil	19.70%
Aromatic Hydrocarbons	10.70%
Aluminum Salts & Oxides	56.98%
Total Weight	100.00%

ONE

GALLON



O'BRIEN'S

75⁰⁰

EXTERIOR EGGSHELL
PAINT

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

GREEN BALSAM

symphonic colors

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALTIMORE, MARYLAND

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

1 Coat Work — One coat will do an excellent job.
2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil.

2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

THE O'BRIEN CORPORATION
 SOUTH BEND, IND. OKLAHOMA CITY, OKLA.
 BALTIMORE, MD. SAN FRANCISCO, CALIF.
 LOS ANGELES, CALIF.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles*

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)
 *NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

CAUTION! COMBUSTIBLE

KEEP AWAY FROM HEAT AND OPEN FLAME
 CONTAINS LEAD OR OTHER COMPOUNDS HARMFUL IF EATEN
 Do not apply on any interior surfaces where it may be eaten. Keep away from toys, cribs and other furniture which might be chewed by children. Avoid contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use. Do not use in confined spaces. USE WITH ADEQUATE VENTILATION.

"75" EGGSHELL GREEN BALSAM
 Pigment 24.45%
 18% Lead Zinc Oxide 24.45%
 Carbon Black 1.00%
 Silica 47.45%
 Solvent 100.00%
 Vehicle
 Modified Sero Alkyd Resin 40.00%
 Heat Resistant Linseed Oil 25.00%
 Mineral Spirits 35.00%
 Mineral Spirits & Driers 100.00%

REC'D. No. 9-21-60
 DATE

ONE

 O'BRIEN'S

GALLON

75⁰⁰

EXTERIOR EGGSHELL
PAINT

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

ICEBERG

symphonic colors

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALTIMORE, MARYLAND

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work — One coat will do an excellent job.
- 2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

- 1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil.
- 2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

THE O'BRIEN CORPORATION
SOUTH BEND, IND. OKLAHOMA CITY, OKLA.
BALTIMORE, MD. SAN FRANCISCO, CALIF.
LOS ANGELES, CALIF.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles *

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

CAUTION! COMBUSTIBLE

KEEP AWAY FROM HEAT AND OPEN FLAME. CONTAINS LEAD OR OTHER COMPOUNDS HARMFUL IF EATEN. Do not apply on any interior surfaces of a dwelling, or a place used for the storage of food, or on children's toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use. Keep out of reach of children. USE WITH ADEQUATE VENTILATION.

"75" EXTERIOR EGGSHELL HOUSE PAINT - ICEBERG	
Pigment	45.00%
Triphenyl Disoxide	21.30%
High Speed Zinc Oxide	21.40%
Silicone	100.00%
Vehicle	100.00%
Non-Flashed Oil	12.00%
Non-Flashed Linseed Oil	24.00%
Non-Flashed Turpentine	10.00%
Aluminum Hydroxide	10.00%
Aluminum Silicate & Drier	100.00%
Less than 5% Thinning Colors Added	

RECEIVED
REC'D No. 8670
DATE 9-24-66

ONE

GALLON

 O'BRIEN'S

75⁰⁰

EXTERIOR EGGSHELL
PAINT

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

LIME

symphonic colors

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALTIMORE, MARYLAND

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

**Wood Shingles, Siding, Trim and
Un glazed Asbestos Shingles (Previously Painted)**

1 Coat Work — One coat will do an excellent job.

2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil.

2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

THE O'BRIEN CORPORATION
SOUTH BEND, IND. OKLAHOMA CITY, OKLA.
BALTIMORE, MD. SAN FRANCISCO, CALIF.
LOS ANGELES, CALIF.

REC'D STENOGRAPHY
REGN. No. 88372
DATE 9-24-60

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat—"75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

***NOTE:** "75" Exterior Eggshell is not recommended for use over unweathered asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

**DO NOT TAKE INTERNALLY
CAUTION! COMBUSTIBLE**


KEEP AWAY FROM HEAT AND OPEN FLAME. CONTAINS LEAD OR OTHER COMPOUNDS HARMFUL, IF EATEN.

Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, stairs, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and thoroughly after handling and before eating or smoking. Keep container closed when not in use. Keep out of reach of children.

USE WITH ADEQUATE VENTILATION.

75% EGGSHELL - LUMS	
Pigment	48.24%
AZO Nickel Yellow	30.73%
Titanium Dioxide	3.72%
18% Leached Zinc Oxide	27.33%
Silicates	37.32%
	100.00%
Vehicle	53.74%
Modified Soya Alkyl Resin	5.73%
Flow Linseed Oil	5.59%
Heat Treated Linseed Oil	21.63%
Mineral Spirits & Driers	11.20%
Aromatic Hydrocarbons	10.80%
	100.00%

ONE



O'BRIEN'S

"75"

EXTERIOR EGGSHELL
PAINT

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

ORIENTAL SAND

"symphonic colors"

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALTIMORE, MARYLAND

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work** — One coat will do an excellent job.

Wood Shingles, Siding, Trim (New, Unpainted)

- 1st Coat** — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil.
- 2nd Coat** — "75" Exterior Eggshell, used as it comes from the can.

THE O'BRIEN CORPORATION
SOUTH BEND, IND. OKLAHOMA CITY, OKLA.
BALTIMORE, MD. SAN FRANCISCO, CALIF.
LOS ANGELES, CALIF.

REGISTERED

REGN. No.

DATE 4-21-60

**New Stucco, Concrete, Masonry and Unpainted,
Un glazed Asbestos Shingles ***

1st Coat ~ A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unweathered asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY


CAUTION! COMBUSTIBLE

**KEEP AWAY FROM HEAT
AND OPEN FLAME
CONTAINS LEAD OR OTHER COM-
BUSTING MATERIALS**

Do not apply on any interior surfaces of a dwelling, or a place used for the care of children, or on window sills, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use. Keep out of reach of children. USE WITH ADEQUATE VENTILATION.

"75" EXTERIOR EGGSHELL HOUSE PAINT — ORIENTAL SAND	
Pigment	45.99%
Barium Dioxide	28.30%
18% Lead-Zinc Oxide	28.30%
Silicates	43.40%
	100.00%
White	
Linseed Oil	54.01%
Heat Treated Linseed Oil	12.09%
Soya Bean Alkyd Resin	24.36%
Aromatic Hydrocarbon	5.80%
Mineral Spirits & Drier	10.83%
	46.99%
	100.00%
Less than 1% Tinting Colors Added	

ONE




O'BRIEN'S

"75"

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

SIERRA SLATE
symphonic colors

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALTIMORE

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth, easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work — One coat will do an excellent job.
- 2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

- 1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil.
- 2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

THE O'BRIEN CORPORATION
SOUTH BEND, IND. OKLAHOMA CITY, OKLA.
BALTIMORE, MD. SAN FRANCISCO, CALIF.
LOS ANGELES, CALIF.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles*

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

CAUTION! COMBUSTIBLE

KEEP AWAY FROM HEAT

AND OPEN FLAME

CONTAINS 1.5 LBS. OF SOLID COM-

POUNDS HARMFUL IF EATEN

Do not apply on any interior surfaces

of a dwelling, or a place used for the

care of children, or an window sill,

might be chewed by children. Avoid

breathing vapor or spray mist and pro-

longed contact with skin. Wash thor-

oughly after use. Keep out of reach of


children. Keep out of reach of children.

USE WITH ADEQUATE VENTILATION.

75 EGGSHELL - SHELL BLAT	
Pigments	44.40%
10% Lead Oxide	10.00%
10% Zinc Oxide	10.00%
Carbon Black	4.00%
Calcium Hydroxide	10.00%
Silica	10.00%
Vehicle	100.00%
Heat Treated Oil	11.31%
Heat Treated Oil	22.62%
Heat Treated Oil	10.72%
Mineral Spirits & Others	49.29%
	100.00%

RECEIVED
REGN. No. 9-24-60
DATE

ONE




O'BRIEN'S

"75"

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SID

SUNCREST

"symphonic colors"

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALT

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and

Unglazed Asbestos Shingles (Previously Painted)

1 Coat Work — One coat will do an excellent job.
2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil.

2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

THE O'BRIEN CORPORATION
 SOUTH BEND, IND. OKLAHOMA CITY, OKLA.
 BALTIMORE, MD. SAN FRANCISCO, CALIF.
 LOS ANGELES, CALIF.

REGISTERED

REGN. No. 88513

DATE 9-24-60

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles *

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use if overglazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

CAUTION! COMBUSTIBLE

KEEP AWAY FROM HEAT AND OPEN FLAME

CONTAINS LEAD OR OTHER COMPOUNDS HARMFUL IF EATEN

Do not apply on any interior surfaces of a building, or a place where the care of children, or other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after handling and before eating or smoking. Keep container closed when not in use. Keep out of reach of children. USE WITH ADEQUATE VENTILATION.

24 EGGSHELL - SUNCREST	45.4%
PIGMENT	30.7%
ALCO Nels Yellow	20.7%
18% Lead Zinc Oxide	25.5%
Silicates	100.00%
VEHICLE	54.24%
Acrylic Copolymer Resin	11.6%
Neat Treated Linseed Oil	31.5%
Aluminum Oxide	18.4%
Aromatic Hydrocarbons	100.00%

ONE

GALLON


O'BRIEN'S

75

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

TUMBLEWEED

symphonic colors

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALTIMORE, MARYLAND

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work — One coat will do an excellent job.
- 2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

- 1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil.
- 2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

THE O'BRIEN CORPORATION
SOUTH BEND, IND. OKLAHOMA CITY, OKLA.
BALTIMORE, MD. SAN FRANCISCO, CALIF.
LOS ANGELES, CALIF.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles*

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

CAUTION! COMBUSTIBLE

KEEP AWAY FROM HEAT

DO NOT USE FOR OTHER PURPOSES

CONTAINS LEAD OR OTHER COMPOUNDS HARMFUL IF EATEN

Do not apply on any interior surfaces of a dwelling, or a place used for the storage of food, or on children's toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash thoroughly after use. Do not use in confined spaces or smoking. Keep container closed when not in use. Keep out of reach of children. USE WITH ADEQUATE VENTILATION.

"75" EXTERIOR EGGSHELL HOUSE PAINT — TUMBLEWEED	
Pigment	45.99%
Titanium Dioxide	28.30%
18% Lead Zinc Oxide	26.30%
Silicates	43.40%
	200.00%
Vehicle	54.01%
Raw Unacid Oil	12.09%
Heat Treated Linseed Oil	24.20%
Soya Bean Alkyd Resin	5.86%
Aromatic Hydrocarbon	10.83%
Mineral Spirits & Drier	46.99%
	100.00%
Less than 5% Tinting Colors Added	

ONE

GALLON

 O'BRIEN'S

75⁰⁰

EXTERIOR EGGSHELL
PAINT

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

OLIVE

"symphonic colors"

MADE IN U.S.A. BY THE O'BRIEN CORPORATION • SOUTH BEND, INDIANA • BALTIMORE, MARYLAND

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

**Wood Shingles, Siding, Trim and
Un glazed Asbestos Shingles (Previously Painted)**

1 Coat Work — One coat will do an excellent job.

2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil.

2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

THE O'BRIEN CORPORATION
SOUTH BEND, IND.
BALTIMORE, MD.
OKLAHOMA CITY, OKLA.
SAN FRANCISCO, CALIF.
LOS ANGELES, CALIF.

REGISTERED

REG'N. No.

DATE _____

Q 9-K-1

**New Stucco, Concrete, Masonry and Unpainted,
Un glazed Asbestos Shingles***

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY
CAUTION! COMBUSTIBLE
KEEP AWAY FROM HEAT
AND OPEN FLAME
CONTAINS LEAD OR OTHER COM-
POUNDS HARMFUL, IF EATEN

Do not apply on any interior surface of a dwelling, or a place used for the care of children, or on window sill, toys, cribs and other furniture which might be chewed by children. Avoid breathing vapor or spray mist and prolonged contact with skin. Wash hands thoroughly after handling and before eating or smoking. Keep out of reach of children. Do not use. Keep out of reach of children. Use with ADEQUATE VENTILATION.

-75% ROGGSHELL - OLIVE	
Pyment	47.16%
Titanium Dioxide	19.67%
10% Leadred Zinc Oxide	27.14%
C. Hydroxide	2.00%
Chromium Oxide	4.01%
C. P. Chrome Yellow	1.45%
Silicates	45.64%
	100.00%
Vehicle	57.84%
Raw Unseeded Oil	11.86%
Heat treated Unseeded Oil	23.37%
Acrylonitrile Butadiene Styln	10.59%
Aluminum Oxide	10.00%
Mineral Spirits & Drier	48.89%
	100.00%