



MOUNT SINAI SCHOOL OF MEDICINE
of The City University of New York
FIFTH AVENUE AND 100TH STREET • NEW YORK, N.Y. 10029



Department of Community Medicine

March 23, 1976

PLAINTIFF'S EXHIBIT

FD-310a

Dr. Erwin Eichen
Ford Motor Company
Room 1526
The American Road
Dearborn, Michigan 48121

Dear Dr. Eichen:

I am enclosing a manuscript of "Asbestos exposure during brake lining maintenance and repair", which is being submitted for publication in Environmental Research. We would appreciate your comments, criticisms or suggestions.

Very truly yours,

Arthur N. Rohl, Ph.D
Environmental Sciences Laboratory

ANR:sl
Enc.

8005 1866

PRODUCED BY FORD

ABSTRACT

Data obtained on asbestos exposure of garage mechanics during brake lining maintenance and repair work show that fiber concentrations frequently in excess of regulated limits, are common. The presence of chrysotile, ranging from 2 to 15 percent, in brake drum dusts, was demonstrated by x-ray diffraction, transmission electron microscopy, selected area electron diffraction and electron microprobe analyses. Unaltered chrysotile was found, both in fiber and fibril form, in air and brake drum dust samples. The chrysotile asbestos content of personal air samples, taken during automobile brake repair work, was measured both by optical and electron microscopic techniques. While a positive correlation exists between the types of measurements, the present technique of optically counting asbestos fibers may considerably underestimate the levels of total asbestos exposure.

8005 1867

PRODUCED BY FORD

Asbestos Exposure During Brake Lining Maintenance and Repair*

Arthur N. Rohl, Arthur M. Langer, Mary S. Wolff and Irving Weisman
Environmental Sciences Laboratory
Mount Sinai School of Medicine
of the City University of New York
New York, New York 10029

Introduction

During the past decade, significant disease risk has been found associated with the inhalation of asbestos fibers in a number of occupational and environmental circumstances other than in asbestos mining, milling and manufacturing, where serious hazard was already known (Wagner et al., 1960; Newhouse and Thompson, 1965; Selikoff et al., 1964, 1965; Harries, 1968).

Such exposures were found in the construction industry and in shipbuilding, as well as in other industrial settings where asbestos products were used. More recently, asbestos exposure has been suggested to occur during automotive brake lining repair and installation work, and measurable concentrations of asbestos fiber were observed in the work environment of workmen involved in these operations (Hickish and Knight, 1970; Hatch, 1970; Boillat and Lob, 1973). With limited data available, however, uncertainty remained regarding the type and extent of asbestos exposure during this work. Some investigators have questioned whether free asbestos fibers survive the high temperatures produced during braking action (Lynch, 1968;

* This research was supported by Center Grant ES 00928 of the National Institute of Environmental Health Sciences of the U.S. Department of Health, Education and Welfare. Assistance was also provided in part by the Health Research Council of the City of New York HRC U 2329 and by the Ford Motor Company.

2

Hickish and Knight, 1970; Hatch, 1970) contending that asbestos decomposes as a result of the high point contact temperatures produced at the interface of the brake drum or disc and brake lining.

We have sought to obtain information concerning asbestos exposure of workmen engaged in brake lining maintenance and brake shoe installation, by analysis of residual dusts recovered from brake linings and by direct measurement of the free asbestos fiber content of workroom air in areas where these operations take place. In the United States, an estimated work force of at least 900,000 auto mechanics and garage workers are potentially exposed to asbestos in the servicing of both brake and clutch linings. Furthermore, much brake dust enters the general environment during automobile use (Jacko and DuCharme, 1973), to add more to the burden of asbestos air pollution (Selikoff, Nicholson and Langer, 1972).

Asbestos in friction materials

In the United States, an estimated 118 million pounds of asbestos is used annually for the production of brake friction materials (Jacko and DuCharme, 1973). After processing (cutting, grinding, punching), the asbestos in the material sold is approximately 103 million pounds per year. In addition, asbestos contained in automotive clutch friction materials amounts to 4.5 million pounds annually.

Major constituents of brake linings

A number of materials are commonly used in the manufacture of the three major automotive brake lining components (binder, fiber reinforcer, and property modifier). These are listed in Table I.

Suggested drawing phenolic-type resin which would include oil-modified phenolic

Binder:

The binders used in the automotive industry today are primarily phenolic resins, which are noted for high binding efficiency and ability to withstand pyrolytic breakdown.

Other materials have been used, in varying proportions, in addition to resins, for binder improvement (Table I).

Fiber:

For fiber reinforcement of the friction product, chrysotile asbestos is used almost exclusively. The mineral typically comprises from 40% to 50% of the brake product. Fiber grades 4 through 7 are used, and occasionally, several sizes are admixed or even calcined to improve strengthening characteristics.

calcining may improve performance characteristics is not strengthening characteristics

Modifiers:

Perhaps the widest range of materials used in friction products are the property modifiers. Nineteen representative compounds are listed in Table I. Modifiers are used for a number of purposes; they are included to increase brake shoe "density," making the brake surface able to withstand high pressures (e.g., barite); they are included as "lubricants" to reduce the coefficient of friction along the brake surface, and thereby prevent "grabbing" (e.g., lead compounds); they act as "friction agents" increasing the coefficient of friction and enhancing the braking action of the shoe (e.g., brass chips); they act as internal "abrasives," which help to "recondition" the braking surface and remove deposited decomposition products (e.g., rottenstone, quartz); they act as "heat sinks," reducing binder pyrolysis and fiber decomposition thereby extending the useful life of the lining (e.g., brass chips, metals, etc.).

8005 1870

PQ

It is important to note that one major purpose of the reconditioning agents is to retard the formation of forsterite (a mineral not originally present in the brake material, but created by dehydroxylation and recrystallization of chrysotile asbestos at high temperatures) which may accumulate on the surface of the brake lining. The hardness of the forsterite (Mohs, 6.5-7.0) is such that it tends to score and gouge brake linings (hardness 3-3.5), degrading them prematurely. Therefore, recrystallization of chrysotile to forsterite is an unwanted effect, hindered insofar as possible by the modifiers present in the matrix.

*Not all brake
linings are
asbestos
and some have
modifiers*

Materials of biological interest

Asbestos, quartz, and heavy metals are constituents of automotive brake linings, each warranting special consideration from the viewpoint of biological activity. The focus of this report is limited to the problem of chrysotile asbestos exposure.

Mechanisms of degradation of brake linings during use

Brake wear is dependent upon many factors, such as the temperature generated at the surface of the brake shoe during braking operations. At any one time, only a small percentage of the rubbing area is in contact with the wheel, with "hot spots" generated, ranging up to 800 to 1,000°C (Carroll, 1962; Anderson, 1969). It is not uncommon during moderate braking action, to attain temperatures as high as 500°C (Anderson, 1969). Some investigators have suggested that, in addition to binder pyrolysis, chrysotile completely dehydroxylates under these conditions and "reduces to powder" where it is swept off the brake facing (Carroll, 1962). However, this hypothesis is oversimplified, in that other important processes, besides thermal wear, contribute to shoe breakdown, and brake shoe degradation.

*mention of
temperatures
not made in
this report*

8005 1871 **PQ**

(Durwell, 1957). For example, the effects of abrasive wear and macro-shear have been investigated.

When monitored by x-ray diffraction, chrysotile in brake materials displays structural strain and substructure fragmentation, caused by shear during braking processes (Muzutani et al., 1973). This shear strain produces material fatigue which, with binder pyrolysis, can cause brake lining disintegration at temperatures far below those required for chrysotile dehydroxylation. Therefore, brake lining disintegration may liberate partially altered, or unaltered, chrysotile fibers.

Thermal decomposition of chrysotile

Differential thermal analysis indicates that chrysotile undergoes dehydroxylation at 650°C to 680°C and recrystallizes (anhydrous magnesium silicate to forsterite) (Mg_2SiO_4) at about 810°C to 820°C (e.g., Martinez, 1966; Daykin, 1971; Berry, 1971; Monkman, 1971). These temperature ranges are subject to great variation as a function of the chemistry of the fiber, particle size, instrumental variations, sample packing, etc. Also, forsterite has been noted to form, during prolonged static heating, at considerably lower temperatures (Bates and Comer, 1957; Martinez, 1966; Brindley and Hayami, 1965; Naumann and Drescher, 1966). In general, temperatures in excess of 570°C are required for dehydroxylation and incipient forsterite formation in chrysotile. Extensive study of both the thermal behavior of chrysotile and brake lining composition and design indicates that chrysotile fiber may survive in the decomposed lining dust.

Analysis of brake drum dust (decomposed lining)

Ten samples of automobile brake drum dusts were collected and examined by optical microscopy, x-ray diffraction, transmission electron microscopy

8005 1872

and scanning electron microscopy with microchemical capability, for the purpose of determining the presence or absence of chrysotile.*

Optical microscopy, employing polarized light, was generally not useful for detecting asbestos in brake drum dust. A number of factors are considered responsible for this phenomenon including the low relief and birefringence of chrysotile and the nature of the matrix, consisting largely of road dust, resin binder and pyrolyzed residue, which, in optical microscopic preparations, readily obscures the smaller asbestos fibers.

X-ray diffractometry, in the continuous and step-scan mode, was performed on all dusts. Chrysotile reflections ($hkl = 002; 020; 004$) were observed in all ten samples. The weight occurrence ranged from about 2-15 percent, with an average ranging from 3-6 percent. Lead-phases, quartz, calcite, mica, clays, barite, graphite and alpha-iron particles were identified as well. In several samples, weak, diffuse reflections suggested the presence of forsterite, but positive identification could not be made using this technique.

Identification of chrysotile by electron microscopy

Transmission electron microscopy, selected area electron diffraction and electron microprobe analysis of the brake dusts were carried out on each of the ten samples after preparation by a technique which disperses the dust particles in a nitrocellulose film without altering particle size

* We acknowledge the cooperation of the United Automobile Workers, Local Union #259 and the Automobile Dealers Industrial Relations Association in helping us obtain these samples in auto maintenance shops in the New York area. Each sample was taken from "a typical job" under way at the time.

distribution. Free chrysotile fiber bundles and fibrils were observed in all ten samples (Fig. 1). Selected area electron diffraction analysis of representative fibers demonstrated the preservation of the chrysotile structure (Figs. 2A & B). Some patterns displayed arcuate reflections suggestive of interfibril rotation and intrafibril displacement (Figs. 2A & B). Occasionally, fibers were observed without characteristic chrysotile morphology, with mottled surfaces and obliterated fibrils, indicating partial or complete recrystallization. Electron diffraction patterns obtained from these particles displayed polycrystalline characteristics of multiple random reflections or Debye-Scherrer rings rather than the distinctive single fiber chrysotile pattern (Fig. 2B). Microchemical analysis with a probe technique on the unaltered fibers showed them to possess the usual Mg:Si ratio of chrysotile (Fig. 3). In addition to free chrysotile fiber bundles and fibrils, chrysotile was also frequently observed projecting from the margins of binder fragments

Free asbestos fibers present in the decomposed lining dusts were sized at 42,000X magnification. The results, seen in Table II, show that most fibers are too small to be seen by optical microscopy; almost all of them are shorter than $0.4\mu\text{m}$ in length; virtually all are of respirable size. Hatch (1970) in reporting on optical fiber counts obtained from brake cleaning operations with compressed air jet, found that 94% of the fibers fell in the $2\text{--}5\mu\text{m}$ length category, while only 6% were longer than $5\mu\text{m}$. Jacko and DuCharme (1973) made size distribution measurements of asbestos fibers in brake dusts generated during dynamometer tests, using both optical and electron microscopy. They found, at magnifications of 22,000X, that 30% of the fibers were from $0.25\mu\text{m}$ to $0.50\mu\text{m}$ in length and that 60% were longer than $0.50\mu\text{m}$. Some discrepancies between our data and those of Jacko and DuCharme may be

8005 1874

attributed to their use of a lower magnification (22,000X vs. 42,000X), at which fibers shorter than $0.20\mu\text{m}$ may not be easily seen or identified on the electron microscopic screen. Thus, both the optical fiber count data in other studies and the electron microscopic fiber size distribution data indicate that the chrysotile fiber population generated by brake wear is a strongly skewed one, with almost all fibers concentrated in the smaller than $5\mu\text{m}$ region. No attempt was made to size the asbestos-binder particulates.

Personal air sampling during brake repair work

Personal air sampling for asbestos exposure during brake lining maintenance and repair was carried out at franchised auto dealer garages, taxi fleet repair shops and a municipal truck repair shop, all located in New York City.* Personal air samples were taken during and after brake repair work and at varying distances from the work sites in other areas of the garages and shops. The latter samples were intended to provide information concerning levels of asbestos exposure which garage employees other than those doing brake work might experience.

Asbestos exposure during automobile brake repair work

Air samples were first taken in the breathing zone of mechanics doing brake repair work. These peak exposure measurements were taken over periods of 3-8 minutes during which the workers were blowing dust from brake drums.

* Assistance in providing opportunity for sampling was given by the Department of Air Resources, New York City.

The air samples, taken on membrane filters, were processed, and fiber counts made in accordance with the procedures which have been adopted by the Occupational Safety and Health Administration (OSHA) of the U.S. Department of Labor (Bayer, Brown and Zumwalde, 1975). Essentially, the analysis consists of counting fibers $5\mu\text{m}$ to $100\mu\text{m}$, in a fixed area of a Porton graticule, using phase contrast microscopy at a magnification of 400X. This microscopic method enhances image contrast and allows large asbestos fibers to be readily seen and counted.

When a vehicle is brought into a repair shop for brake lining inspection or replacement, the wheel is removed and loose dust is removed from the drums and back plates, generally by means of a compressed air jet. A recent survey of brake repair establishments in Baltimore and Washington revealed that this is the standard method in those cities (Castleman et al., 1975). A similar situation exists in New York City. The cloud of dust that is produced is visible for several minutes afterwards (Fig. 4). Table III shows that fiber concentrations are high in the operator's area under these conditions (an average concentration of 16 fibers/ml), and that there are significant concentrations at least 20 feet away.

Background or area sampling during the same operation shows that, at least 14 minutes after jet air blowing and up to 75 feet away, asbestos concentrations are still measurable even by optical microscopy. The data in Table III indicate that an asbestos concentration gradient, dependent on distance and time, is associated with this operation. It is evident that any person 65-75 feet away can be exposed. Current (interim) regulations of OSHA prohibit concentrations of 5 fibers/ml or more, longer than $5\mu\text{m}$, as a time-weighted average for workers, and concentrations above 2 fibers/ml will be illegal after 1976. Regulations set a peak

8005 1876

PRODUCED BY FORD

These measurements get as low as 0.1 fibers/ml. What is the sensitivity, what is measured on a blank run, and what is the ambient fiber concentration, can outside air levels affect? Could the sum of these extraneous effects account for much of the 0.1 fibers/ml?

Fig. 4
asbestos
cloud

concentration (maximum excursion) of 10 fibers/ml of air. Newly proposed standards are designed to set a limit of 0.5 fibers/ml (500,000 fibers/m³), with a maximum excursion of 5 fibers/ml.

It was generally found that there was minimal, if any, effort to control dust in most garages. Workmen do not use respiratory protection. There was little awareness of the potential hazard of brake dust.

In a single instance brake drum cleaning was not done with a compressed air jet, but with a dry hand brush. Fiber concentrations were somewhat less (2.5 fibers/ml) at the operator, but background levels 12 feet away were the same as with air jet cleaning.

Asbestos exposure during truck brake repair and installation work

Personal air sampling was also conducted at the New York Department of Sanitation truck repair shop, where various kinds of brake application and repair work are performed. A large proportion of used truck brake linings are salvaged by grinding the surface to remove grease and imperfections on the surfaces, and the edges of new linings are beveled on a grinding wheel or arcing machine so that the brake will grip properly (Fig. 5). Holes are drilled or punched into the brake lining, which is then riveted onto a steel plate. Some of these operations are similar to those done during the manufacture of brake shoes. Table IV summarizes the results of personal air sampling in the course of this work. During light grinding of truck brake shoes (Fig. 6), an average peak concentration of about 4 fibers/ml was found in the breathing zone of the operator. The data show that measurable fiber concentrations are found 25 feet or more away. At a distance of 25 feet, for example, a concentration of

It is noted that a large proportion of truck brakes is contaminated with grease and has surface imperfections.

Lining are beveled to avoid noise problem and ground to hasten break-in.

8005 1877

1 fiber/ml (1,000,000 fibers/m³) was found. Much larger numbers of shorter fibers would simultaneously be inhaled. During the beveling of truck brake shoes on a grinding machine, very high concentrations of fibers were found in the vicinity of the operator. The average of five air samples was about 37 fibers/ml. Area samples, taken up to 30 feet away from this operation, demonstrated the presence of airborne fibers. It was of interest to note that, at the time of this sampling, from 8-15 other garage mechanics were working within this perimeter and were exposed to asbestos. Fiber levels for other kinds of operations at the truck garage are given in Table IV.

Handwritten note:
Doubtful
this is
beveling?

Boillat and Lob (1973) have reported fiber concentrations measured during punching holes for rivets and grinding. They found values ranging from 0.3 to 29.2 fibers/ml; four of the nine values exceeded 5 fibers/ml.

A comparison of fiber levels visible by light microscopy and electron microscopy

In the ten brake drum dust samples examined, it was found that asbestos fibers shorter than 0.4 μ m predominated (Table II). The OSHA Asbestos Standard does not require that short fibers (< 5 μ m in length) be counted or controlled. This oversight may have considerable biological significance in that small chrysotile fibers readily produce asbestos disease (Bolt, Mills, and Young, 1964, 1965; Davis, 1965; Pott, Euth, and Friedrichs, 1972; Wagner, Berry and Timbrell, 1973; Hilscher et al., 1970). Attention has recently been again called to the potential importance of this question (Bouhuys, 1975).

There is little published information on the numbers of, and sizes of, submicroscopic asbestos fibers in occupational exposures. The present

8005 1878

study afforded an opportunity to collect data on the relationship between submicroscopically- and optically-visible fibers for this specific industrial exposure. Eight air samples were selected for both light and electron microscopic examination. Six of these were taken during brake drum dust removal operations with optical fiber counts recorded from 0.1 to 3.6 fibers/ml. The other two samples were taken during light grinding of automobile brake shoes.

Preparation and analysis of air samples

One square centimeter sections of the eight membrane filters were mounted, dust side down, on microscopic slides and ashed in low temperature activated oxygen to remove organic materials. The ashed residue was dispersed in a drop of nitrocellulose solution. The dispersal was accomplished by a "rubout" technique using the edge of a watchglass (Nicholson, Rohl and Ferrand, 1973). By this method large asbestos fiber bundles are broken into their constituent smaller fibrils and large agglomerates of inorganic materials, which normally obscure the presence of asbestos fibers, are broken into particles small enough to allow virtually all asbestos to be seen. By placing a second slide over the ground residue and nitrocellulose solution and then gliding the two slides apart, a thin film is produced. The dried film is cut into segments which are then floated off in water. The film is mounted onto Formvar-coated electron microscopic grids. Typically, four grids are prepared from each sample and one square on each grid is scanned in the electron microscope at 42,000X magnification to determine the quantity of chrysotile present. By estimating the length and diameter of each fiber, and assuming a cylindrical fiber geometry, the mass of chrysotile per grid square is determined. Representative electron photomicrographs of chrysotile fibers and fibrils

8005 1879

are shown in Figs. 7 and 8.

Results

A comparison of the optical microscopic fiber counts and the electron microscopic total asbestos mass calculations obtained from the eight samples is shown in Table V. Figure 9, showing the same data, is plotted on logarithmic paper, and visual inspection indicates that a positive correlation exists between the optical and electron microscopic results.

For example, from these data it may be possible to predict that, during the grinding of new brake linings, a worker could be exposed to about 0.5 μ g per cubic meter of asbestos daily in circumstances in which the time-weighted TLV of 5 fibers/ml would not have been exceeded. Similarly,

Figure 9 shows that, since a microgram of asbestos represents on the order of one million fibers per cubic meter of air (of greatly varying diameters and lengths), extremely high concentrations of submicroscopic fibers are present up to 65 feet away from brake repair work (e.g., sample No. 5), even though fiber levels in such a case are barely detected, if at all, by the standard optical counting technique. These limited data indicate that the standard (OSHA) optical fiber counting method may be a useful index of total asbestos exposure, at least in the case of automobile repair work. They also indicate that the total exposure is much higher than the OSHA technique records, in terms of as-

bestos fiber number, mass and surface area. Additional studies relevant to this and other kinds of asbestos exposure are needed to confirm and extend these findings. It is important to note that particles of asbestos-containing pulverized brake lining were not included in this mass determination. Their importance, in terms of biologic potential, is presently unknown.

A large scale epidemiological study of brake garage workers is desirable, to determine if they have experienced a higher rate of lung disease and cancer than the general population. The workers population of 300,000 and the exposure time of 10 years for many of them is significant. Studies in cases of lung cancer, other conditions, and other diseases such as asbestosis, are also needed.

How was this number obtained from this data shown?

The first six points are for new dust. The last two are for grinding. I see no reason to expect that the ratio of optical to EM detectable fibers will be the same for these two materials. Indeed, the number of particles and the scatter data in this case are such that this ratio is not reliable.

Summary and Conclusions

1. Chrysotile asbestos fiber is a major component of brake lining materials. Degradation of the lining is brought about by a combination of factors, which include thermal stress, material fatigue and shearing. Modifying agents are included in brake linings which lower the contact temperature between the lining and wheel interface; this, in turn, prevents binder pyrolysis and chrysotile fiber dehydroxylation. The amount of chrysotile fiber which survives the braking operation is related to a number of additional factors, including some which are external to the properties and quality of the lining itself. As a consequence, degradation may occur at temperatures significantly lower than that required for the dehydroxylation of chrysotile, with the persistence of fibers.
2. Ten samples of dust were taken from automobile brake drums in New York City, and analyzed. Optical microscopy was of limited usefulness. X-ray diffraction analysis, using both continuous and step-scan modes demonstrated the presence of chrysotile in all dust samples. The proportion of chrysotile ranged from about 2-15 percent, and averaged about 3-6 percent. This included both free fibers and chrysotile which survived in pulverized binder as particulates. Forsterite, the thermal transformation product of chrysotile could not be unequivocally identified by continuous scan x-ray diffraction.
3. The presence of chrysotile asbestos in the ten dust samples was further verified by transmission electron microscopy, selected area electron diffraction and electron microprobe analyses. Chrysotile was found, both in fiber and fibril form, with unaltered structure

8005 1881

and chemical composition. Its frequency of occurrence was consistent with, but lower than the quantitative determination made by x-ray diffraction analysis. However, it should be noted that x-ray diffraction analysis is based on both free fibers and fibers present in clumps; the latter would obscure the presence of discrete fibers on electron microscopic study. In addition to unaltered fiber, partially altered and completely recrystallized fibers were also seen.

4. Size distribution analysis at 42,000X magnification in the ten samples indicate that about four-fifths of all chrysotile, in fiber form, is shorter than $0.4\mu\text{m}$ in length. These fibers are too small to be seen by optical microscopic techniques.
5. Personal air sampling was conducted during brake repair work in automobile garages in New York City. Standard optical microscopic procedures for fiber counting were used. In samples taken in the vicinity of repairmen blowing dust from automobile brake drums with compressed air, an average concentration of 16 fibers/ml was measured. Background and time-lapse samples indicate that measurable concentrations exist at least 75 feet from the work site and for at least 14 minutes after jet air blowing.
6. Personal air samples were taken at a municipal truck repair facility where various brake fabrication and application operations are performed. Grinding of truck brake shoes resulted in an average concentration of about 4 fibers/ml ($4,000,000/\text{m}^3$). During beveling, an average fiber count of 37 fibers/ml was measured. Exposure levels during drilling, punching rivets and cleanup were also measured.

8005 1882

Background measurements show that fiber concentration gradients are produced during truck brake repair and application work. During light grinding of truck brake shoes, measurable fiber concentrations were found 25 feet or more away, as well as up to 30 feet from brake beveling operations. The background measurements, during both automobile and truck brake work, indicate that many employees in garages other than brake lining workers are potentially exposed to asbestos, including other mechanics and shop management.

7. Eight air samples taken during automobile brake repair work were analyzed by both optical and electron microscopy. A positive correlation was found to exist between optical fiber counts ($> 5\mu\text{m}$) and the total chrysotile mass calculations based on sizing all fibers at 42,000X magnification. These data indicate that standard (OSHA) optical fiber counts may be a useful index of total free asbestos exposure during brake repair work. They also demonstrate that the total free asbestos exposure, in terms of fiber number, mass and surface area is much greater than the optical counting techniques indicate.
8. Attention is called to the fact that in addition to asbestos, other biologically active substances, including free silica and lead compounds, have been identified in brake lining dusts. Their concentrations in brake work environments are not known, and warrant investigation.
9. Potentially hazardous asbestos exposure exists during automotive brake servicing. It has been reported that approximately 900,000 persons are employed in such work in the United States. It is

8005 1883

PRODUCED BY FORD

17
recommended that stringent industrial hygiene measures to control exposure be implemented as rapidly as possible.

8005 1884

PRODUCED BY FORD

References

- Anderson, A.E. (1969). Wear in brake materials. In: Proc. Amer. Sec. M. Wear Conf.
- Anderson, A.E., Gealer, A.L., McCune, R.C. and Sprys, J.W. (1973). Asbestos emissions from brake dynamometer tests. Proc. Soc. Auto. Engin. Meeting, Detroit, Michigan, 14-18 May, 1973, Rpt. 730549.
- Ball, M.C., Taylor, H.F.W. (1963). The dehydration of chrysotile in air and under hydrothermal conditions. Min. Mag., 35, 467-482.
- Bark, L.S., Moran, D. and Percival, S.J. (1975). Chemical changes in asbestos-based friction materials during performance - a review. Wear, 34, 131-139.
- Bates, T.F. and Comer, J.J. (1957). In: Proc. 6th Nat'l. Conf. Clays and Clay Mineralogy, Intl. Monog. Sec., 6, 237-248.
- Bayer, S.G., Brown, T.A. and Zumwalde, R.D. (1975). Document TR-84, U.S. Department of Health, Education and Welfare, Public Health Service, National Institute for Occupational Safety and Health, Cincinnati, Ohio.
- Berry, E.E. (1971). Thermal analysis of various chrysotiles using evolved water analysis techniques. In: Proc. 2nd Intl. Conf. Physical-Chemical Asbestos Minerals, Louvain Univ., 6-9 September, 1971, paper 2:7 15 p.
- Biological Effects of Asbestos (1965). (I.J. Selikoff and J. Churg, Eds.), Ann. N.Y. Acad. Sci. 132(1), 766 p.
- Boillat, M.A., Lob, M. (1973). Risk of asbestosis in workers employed in replacing automobile brake linings. Schweizerische Medizinische Wochenschrift. 103(39):1354-1359.
- Bouhuys, A. (1975). Fibers and fibrosis. Ann. Intern. Med. 83(6), 898-899.
- Bragg, L. and Claringbull, G.F. (1965). The chrystalline state. In: "Crystal Structures of Minerals" (L. Bragg, G. Bell and Sons, Ltd., Eds.), Vol.IV, London.
- Brindley, G.W. and Hayami, R. (1965). Mechanism of formation of forsterite and enstatite from serpentine. Min. Mag., 35, 189-195.
- Burwell, J.T. (1957). Survey of possible mechanisms. Wear, 1, 119-141.
- Carroll, W.G. (1962). The manufacture of brake linings. British Plastics, August, 414-417.
- Castleman, B., Camarota, L.A., Fritsch, A.J., Mazzocchi, S. and Crawley, R.G. (1975). The hazards of asbestos for brake mechanics. Public Health Reports. Vol. 90 No. 3:254-256.

8005 1885

PQ

- Daykin, C.W. (1971). A study of the infrared spectra of chrysotile and related minerals. In: Proc. 2nd Intl. Conf. Physical-Chemical Asbestos Minerals, Louvain Univ., 6-9 September, 1971, paper 2:6, 7 p.
- Davis, J.M.J. (1965). Electron-microscope studies of asbestosis in man and animals. Ann. N.Y. Acad. Sci. 132, 98-111.
- Harries, P.G. (1968). Asbestos hazards in naval shipyards. Ann. Occup. Hyg. 11, 135-145.
- Harris, A.M. (1971). The effects of grinding on the structural and thermal properties of chrysotile asbestos fibers. In: Proc. 2nd Intl. Conf. Physical-Chemical Asbestos Minerals, Louvain Univ., 6-9 September, 1971, paper 3:2A, 6 p.
- Hatch, D. (1970). Possible alternatives to asbestos as a friction material. Ann. Occup. Hyg. 13, 25-29.
- Hickish, D.E. and Knight, K.L. (1970). Exposure to asbestos during brake maintenance. Ann. Occup. Hyg. 13, 17-21.
- Hilscher, W., Sethi, S., Friedrichs, K.H. and Pott, F. (1970). Zusammenhang Zwischen Asbestose and Faserlänge. Naturwissenschaften. 57, 356.
- Holt, P.F., Mills, J. and Young, D.K. (1964). The early effects of chrysotile asbestos dust on the rat lung. J. Path. Bact. 87, 15-23.
- Holt, P.F., Mills, J. and Young, D.K. (1965). Experimental asbestos with four types of fibers: importance of small fibers. Ann. N.Y. Acad. Sci. 132, 87-97.
- Jacko, M.G. and DuCharme, R.T. (1973). Brake emissions: emission measurements from brake and clutch linings from selected mobile sources. EPA Report. 68-04-0020.
- Knight, K.L. and Hickish, D.E. (1970). Investigations and alternative forms of control for dust generated during the cleaning of brake assemblies and drums. Ann. Occup. Hyg. 13, 36-39.
- Langer, A.M., Mackler, A.D. and Pooley, F.D. (1974). Electron microscopical investigation of asbestos fibers. Envir. Hlth. Persp. 9, 63-80.
- Langer, A.M. and Pooley, F.D. (1973). Identification of single asbestos fibers in human tissues. In: Proc. Intl. Conf. of Biological Effects of Asbestos (P. Bogovski et al. Eds.), pp. 19-25. I.A.R.C., Lyon, France.
- Lee, G.L. (1970). Removing dusts from brake assemblies during vehicle servicing—alternative cleaning methods. Ann. Occup. Hyg. 13, 33-36.
- Lynch, J.R. (1968). Brake lining decomposition products. J. Air Pollution Control Assoc., 18, 824-826.
- McConnell, J.D.C. (1967). Electron microscopy and electron diffraction. In: "Physical Methods in Determinative Mineralogy" (J. Zussman, Ed.), pp. 335-370. Academic Press, New York.

8005 1886

PRODUCED BY FORD

- Martinez, E. (1966). Chrysotile asbestos: relationship of the surface and thermal properties to the crystal structure. *Can. Mining and Metall. Bull.*, 69, 414-420.
- Mizutani, Y., Obara, H., Nakajima, K. (1973). X-ray study of friction and wear of resin-bonded asbestos. *Wear*, 23, 387-392.
- Monkman, L.J. (1971). Some chemical and mineralogical aspects of the acid decomposition of chrysotile. In: *Proc. 2nd Intl. Conf. Physical-Chemical Asbestos Minerals*, Louvain Univ., 6-9 September, 1971, paper 3:2, 9 p.
- Morgan, A., Holmes, A. and Lally, A.E. (1971). Solubility of chrysotile asbestos and associated trace metals in 1N HCl acid at 25°C. In: *Proc. 2nd Intl. Conf. Physical-Chemical Asbestos Minerals*, Louvain Univ., 6-9 September, 1971, paper 2:8, 13 p.
- Nicholson, W.J., Rohl, A.N. and Ferrand, E.F. (1971). Air pollution in New York City. In: *Proc. 2nd Intl. Clean Air Congress*. (H.M. Englund and W.T. Berry, Eds.), pp. 136-139. Academic Press, New York.
- Naumann, A.W., and Drescher, W.H. (1966). The influence of sample texture on chrysotile dehydration. *Amer. Mineralogist*. 51, 1200-1211.
- Newhouse, M.L. (1965). Epidemiology of mesothelial tumors in the London area. *Ann. N.Y. Acad. Sci.* 132, 579-602.
- Pott, F., Huth, F. and Friedrichs, K.H. (1972). Tumors of rats after i.p. injection of powdered chrysotile and benz[a]pyrene. *Zbl. Bakt. 1. Abt. Orig.*, 155, 463.
- Selikoff, I.J., Churg, J. and Hammond, E.C. (1964). Asbestos exposure and neoplasia. *JAMA*. 188, 22-38.
- Selikoff, I.J., Bader, R.A., Bader, M.E., Churg, J. and Hammond, E.C. (1967). Editorial: Asbestosis and neoplasia. *Amer. J. Med.* 42(4), 487-496.
- Selikoff, I.J., Hammond, E.C. and Churg, J. (1968). Asbestos exposure, smoking and neoplasia. *JAMA*. 204(2), 106-112.
- Selikoff, I.J., Hammond, E.C. and Churg, J. (1972). Carcinogenicity of amosite asbestos. *Arch. Env. Hlth.* 25, 183-186.
- Selikoff, I.J., Nicholson, W.J. and Langer, A.M. (1972). Asbestos air pollution. *Arch. Env. Hlth.* 25, 1-13.
- Wagner, J.C., Berry, G. and Timbrell, V. (1973). Mesotheliomata in rats after inoculation with asbestos and other materials. *Br. J. Cancer*. 28, 173.
- Zvyagin, B.B. (1967). Electron diffraction analysis of clay mineral structures (translated by S. Lyser), Plenum Press, New York.

Table 1

Common Components of Automotive Brake Linings**

<u>Binder and Organic</u>	<u>Fiber Reinforcer</u>	<u>Property Modifier</u>
Phenolic ^{type} resin	Chrysotile asbestos* (grade 4-7)	Lead compounds
Rubber		Zinc compounds
Tire scrap †	- Unaltered	Antimony oxide
Pitch †	- Calcined	Iron oxide
Cork †	- Mixed fiber	Copper metal
Gilsonite †		Brass chips
Cashew nut ^{shell} resin		Clay minerals
? Boron compounds		Barite (BaSO_4)
Drying oils		Wollastonite (CaSiO_3)
Cresol/catechol/shell resin particles †		Quartz (SiO_2)
		Cryolite ($\text{Na}_6\text{AlF}_{13}$)
		Rottenstone (SiO_2)
		Coke (C)
		Coal (C)
		Gilsonite (C)
		Graphite (C)
		Carbon black (C)
		Molybdenum sulfide (MoS_2)
		Fluorspar (CaF_2)

* Chrysotile fiber constitutes about 50% by weight of most automotive brakes currently manufactured in the United States.

** See Carrol, 1962; Anderson, 1969; Anderson, 1974; Jacko and DuCharme, 1973; Bark, et al., 1975.

1973

8005 1888

PRODUCED BY FORD

Table II

Length Distribution of Chrysotile Fibers in Brake Drum Dust

Fibers counted and sized at 42,000X
(all fibers have diameters from 250Å to 500Å)

<u>Sample</u>	<u>750-1500Å</u>	<u>1500-2250Å</u>	<u>2250-3000Å</u>	<u>3000-3750Å</u>	<u>Total</u>
1	40%	34%	11%	11%	96%
2	32	23	32	-	87
3	20	25	25	-	70
4	26	37	26	7	96
5	57	17	4	-	78
6	23	9	12	12	56
7	50	26	21	2	99
8	29	30	21	17	97
9	6	41	18	10	75
10	11	6	31	31	79

8005 1889

PRODUCED BY FORD

Table III

Asbestos Concentrations During Automobile Brake Service
(fibers 5-100 μ in length, counted by optical microscopy)

<u>Operation</u>	<u>Distance</u>	<u>Number of samples</u>	<u>Fiber Concentration</u> (fibers/ml)	
			<u>Mean</u>	<u>Range</u>
Blowing dust out of brake drums with compressed air jet	3-5 ft.	4	16.0	6.6-29.8
	5-10 ft.	3	3.3	2.0-4.2
	10-20 ft.	2	2.6	0.4-4.8

	<u>Distance from operation</u>	<u>Time lapse</u>	<u>Concentration</u> (fibers/ml)
Background	10 ft.	0 min.	0.3
samples taken at	20 ft.	0 min.	0.8
varying distance	12 ft.	5 min.	0.2
and lapsed times,	50 ft.	5 min.	0.1
after brake drum	65 ft.	7 min.	0.1
blowing	75 ft.	14 min.	0.1

	<u>Distance</u>	<u>Number of samples</u>	<u>Fiber Concentration</u> (fibers/ml)	
			<u>Mean</u>	<u>Range</u>
Cleaning brake drums with dry brush	1-3 ft.	2	2.5	1.3-3.6
Background samples taken 3 minutes after cleaning	12 ft.	3	0.1	0-0.2
brake drums with dry brush				

The new proposed Asbestos Standard of the U.S. Department of Labor records asbestos exposure in fibers/m³, noting that a workman might respire approximately 8m³ of air per working day, retaining an unstudied proportion of inhaled fibers. The above table omits reference to air content of fibers < 5 μ in length.

8005 1890

Table IV

Asbestos Concentrations During Truck Brake Service
(Fibers 5-100 μ in length, counted by optical microscopy)

<u>Operation</u>	<u>Distance</u>	<u>Number of samples</u>	<u>Fiber Concentration</u> (fibers/ml)	
			<u>Mean</u>	<u>Range</u>
Renewing used linings by grinding	3-5 ft.	10	3.8	1.7-7.0
Background to grinding used linings	10 ft.	2	1.5	1.2-1.7
	25 ft.	2	0.8	0.6-1.0
	60 ft.	1	0.2	---
Beveling new linings	3-5 ft.	5	37.3	23.7-72.0
Background to beveling new linings	8 ft.	1	0.6	---
	12 ft.	2	0.4	0.3-0.5
	30 ft.	1	0.3	---
<u>Punching rivets into brake linings</u>	3-5 ft.	2	1.5	1.9-2.0
Chipping rust off used brake linings	3-5 ft.	1	2.4	---
Sweeping floor around grinder	3-5 ft.	1	3.6	---
Background to sweeping floor around grinder	15 ft.	1	3.1	---

8005 1891

PRODUCED BY FORD

Table V

Comparison of Optical and Electron Microscopic Fiber Counts

<u>Operation</u>	<u>Optical Microscopy (fibers/ml)</u>	<u>Electron Microscopy ug/m³</u>
1. Blowing dust off drum with air jet (10 ft. away)	2.0	1.27
2. Background to blowing out brake drum (10 ft. away)	0.3	0.2
3. Blowing dust off drum with air jet (20 ft. away)	0.4	1.1
4. Background to blowing out brake drum (20 ft. away)	0.8	0.1
5. Background to blowing out brake drum (65 ft. away - 7 minutes after blowing stopped)	.1	0.2
6. Cleaning brake drum with hand brush	3.6	6.5
7. Light grindings of new linings before installa- tion	4.7	53.0
8. Light grinding new linings before installation	2.7	66.0

8005 1892

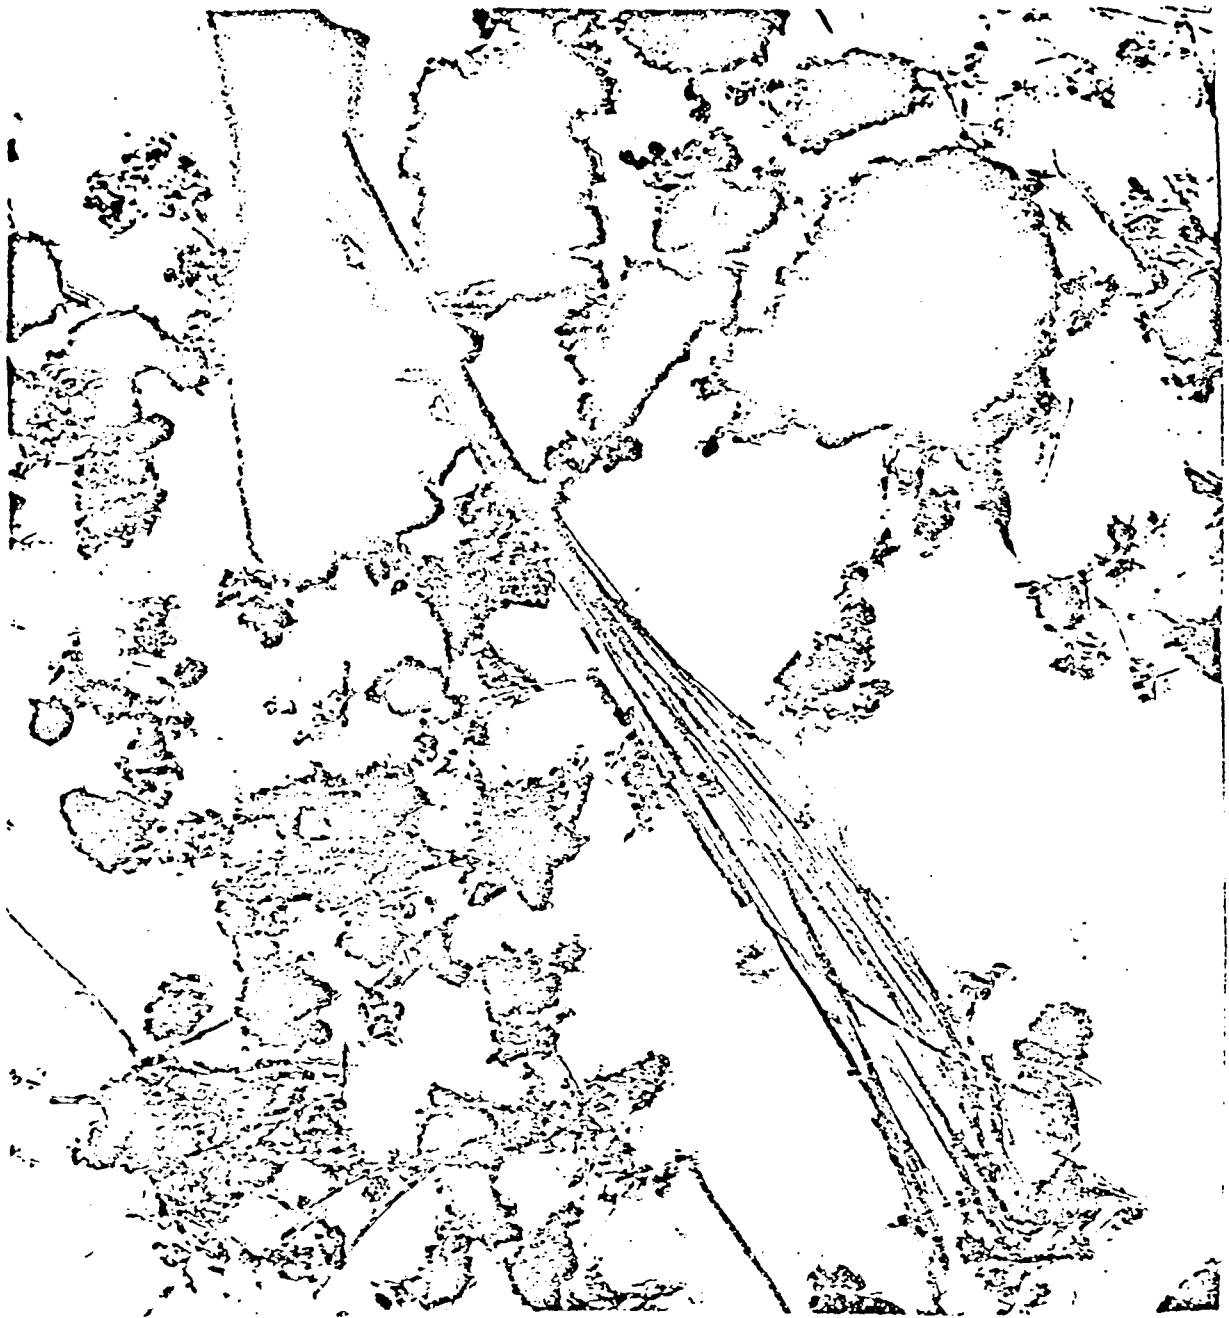


Figure 1. Electronphotomicrograph of large chrysotile bundle in brake drum dust (50,000x magnification). Other particles include phenol resin binder and road dust debris.

8005 1893

PRODUCED BY FORD

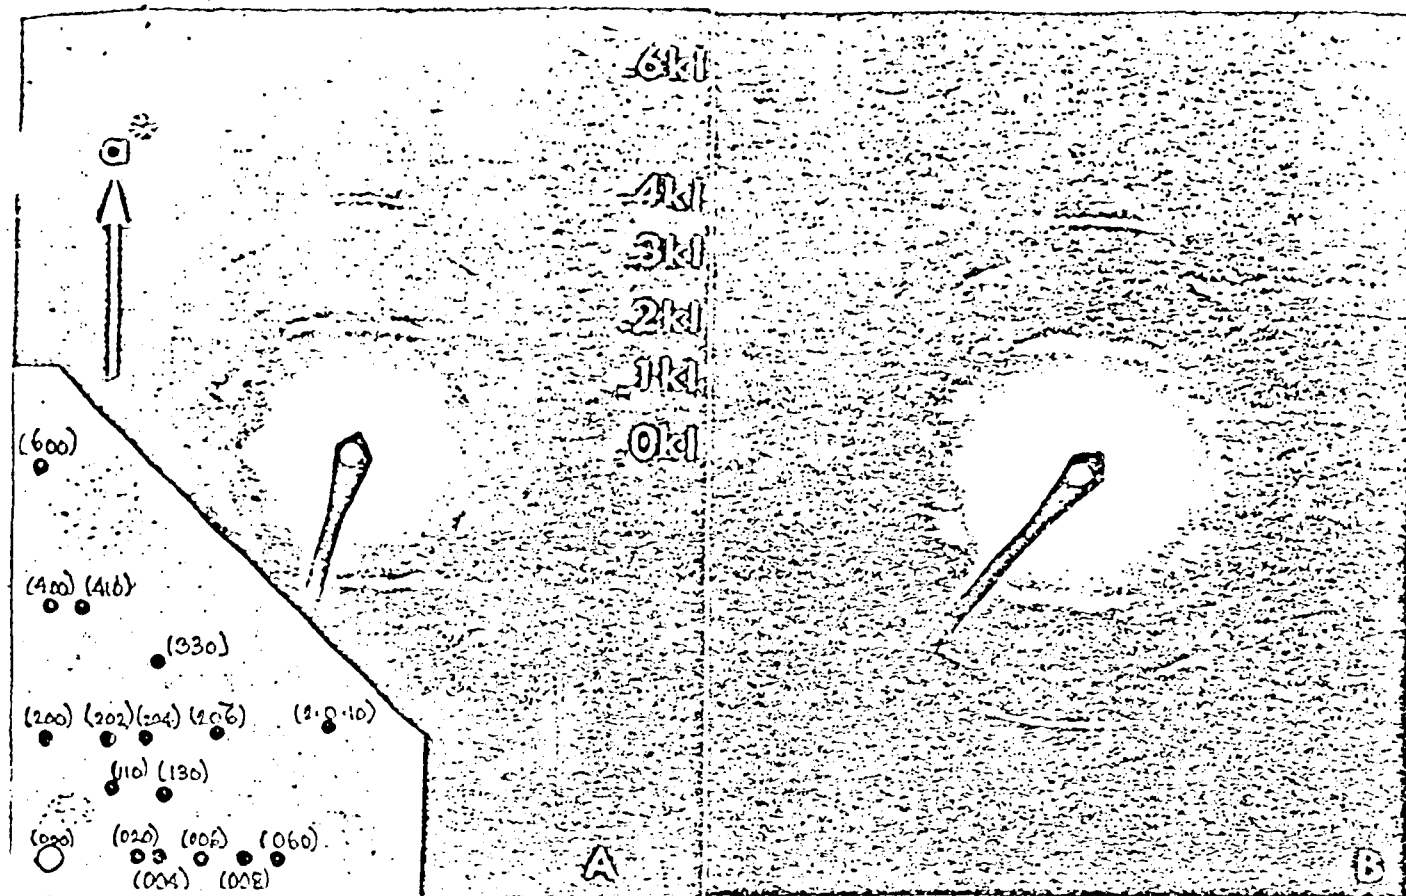


Fig 2
rotation
Selected area electron diffraction patterns obtained on fibers of chrysotile caught during air sampling at brake repair shops. Instrument used: JEOL JEM-120 U. Camera constant on screen: $(L\lambda) = 47.17$. The reciprocal a axis is marked a (A) as are the layer lines in the (0kl) series. Indexing of upper right quadrant yielded 16 reflections which were indexed (insert in A). Pattern in (B) displays "smearing" of reflections in a "clockwise" manner suggesting interplanar rotation.

*selected area
micrograph*

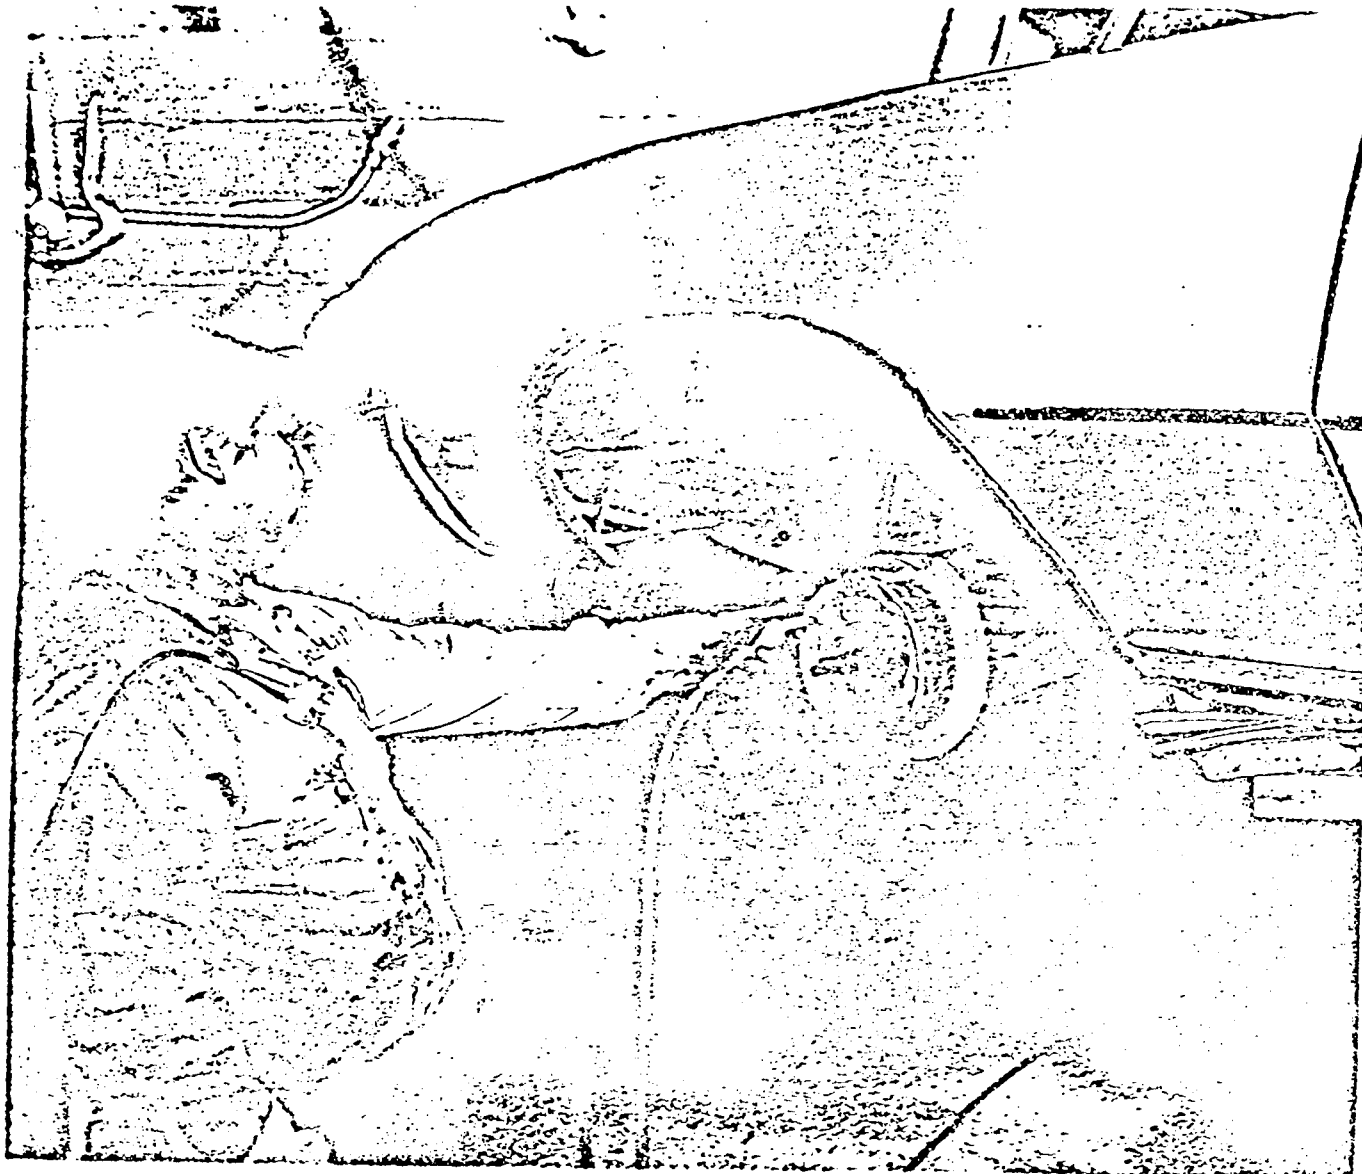


Figure 4. Removal of dust from brake drum and back plate by
pneumatic air blowing at automobile garage.

8005 1895

PRODUCED BY FORD



Fig. 5 Beveling of truck ^{new} brake linings at municipal garage. Arrow indicates accumulation of asbestos dust.

The figure labeled as Figure 6, with the arrow, appears to be the one illustrating beveling. This figure is the same picture, in reverse.

8005 1896



Fig. 6 Renewing of municipal truck brake linings by light grinding to remove grease and dirt.

This figure appears to be the one to illustrate beveling and the dust pile accumulated. If so, there is no figure illustrating light grinding, since Figure 5 is merely the reverse of this one.

8005 1897

PRODUCED BY FORD

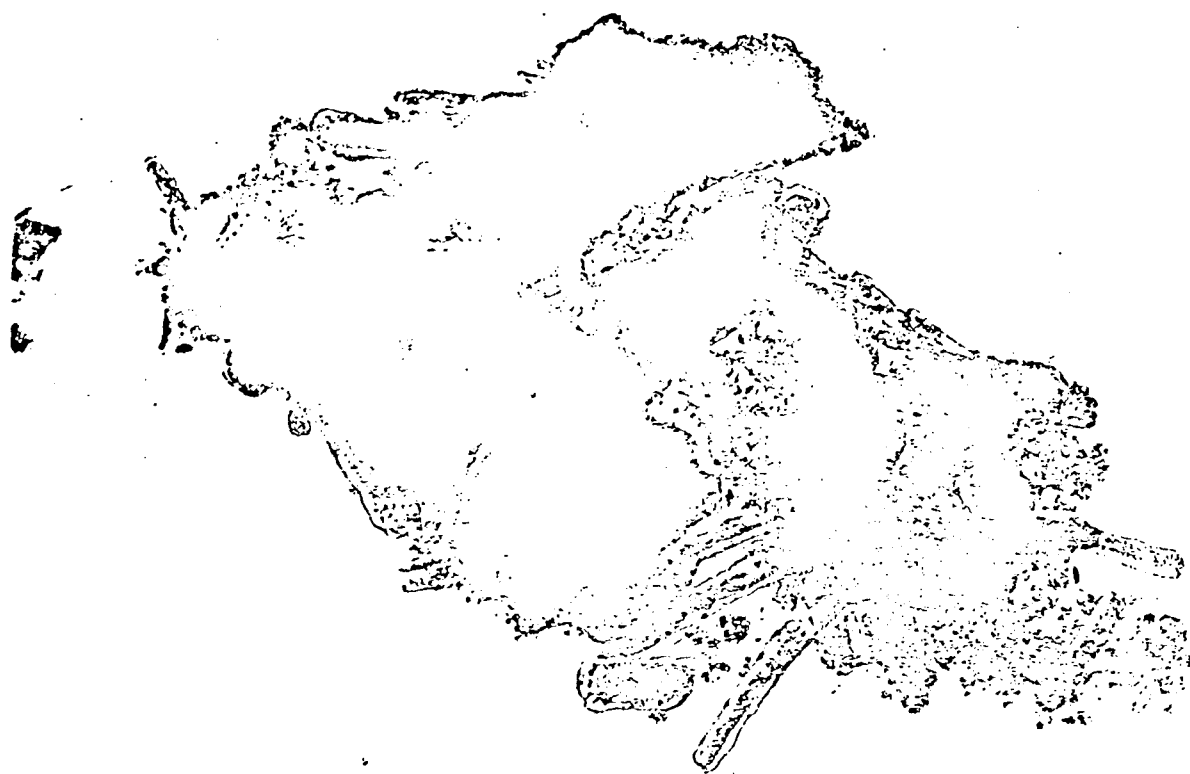


Fig. 7 Electron photomicrograph of air sample taken during brake drum blowing (sae sample # 4, Table V) , Large numbers (70 - 100) of chrysotile , some of which are masked by granular particulates, presumably road dust. (87, 000 total magnification)

8005 1898

PRODUCED BY FORD

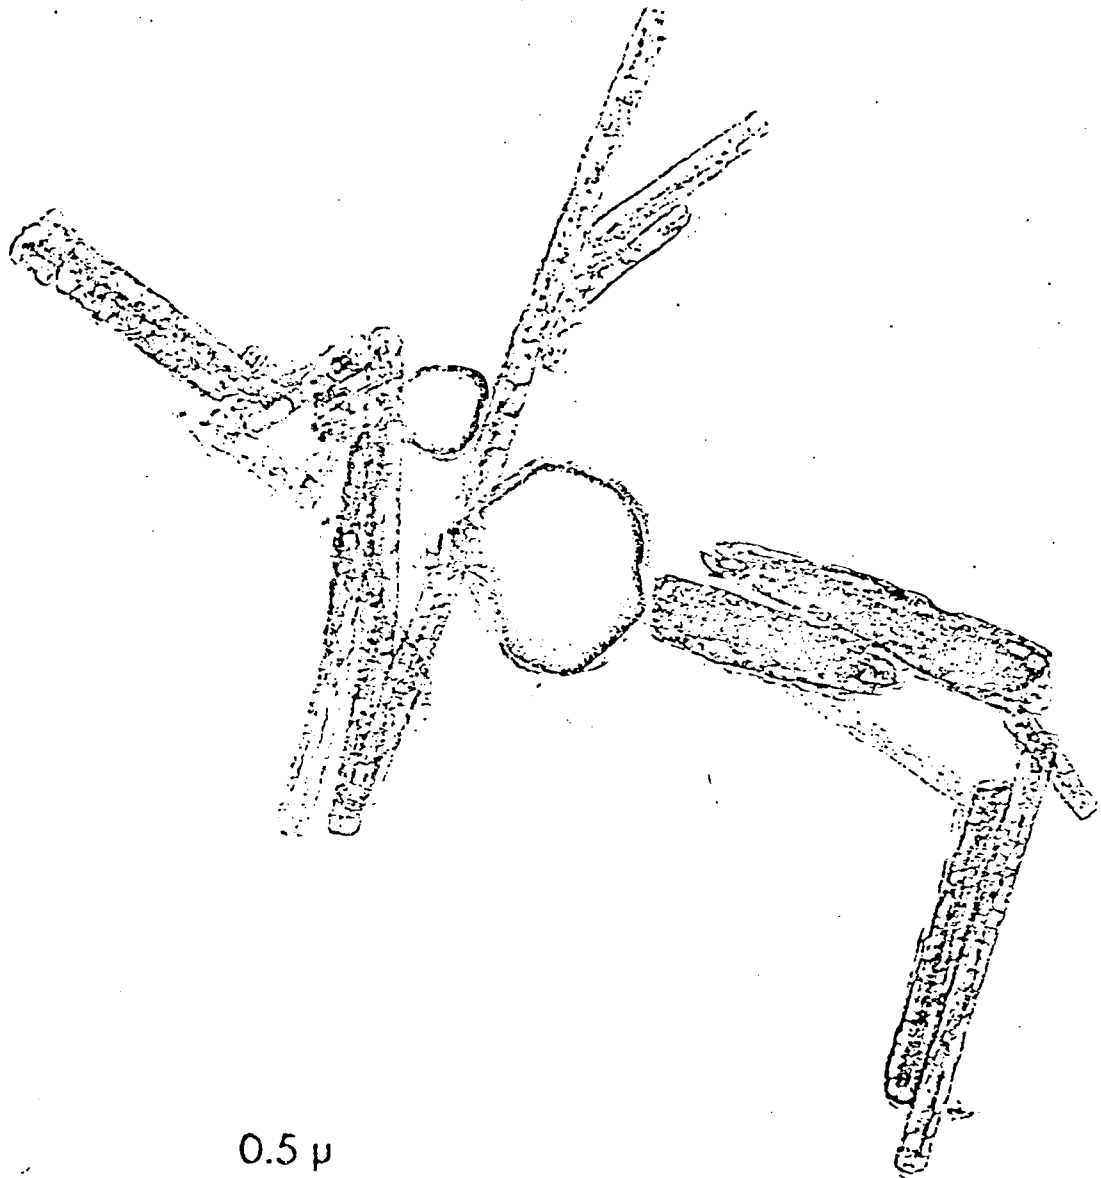


Figure 8. Electronmicrograph of air sample of cluster of chrysotile fibrils in background sample (see sample #3, Table V, 110,000x magnification).

8005 1899


PRODUCED BY FORD

KURTJER DIEZGEN CO.
MADE IN U. S. A.

NO. 340-275 DIEZGEN GRAPH PAPER
LOGARITHMIC
3 CYCLES X 5 CYCLES

Figure 9

COMPARISON OF OPTICAL AND EM FIBER COUNTS - AUTOMOBILE BRAKE LINING SERVICE

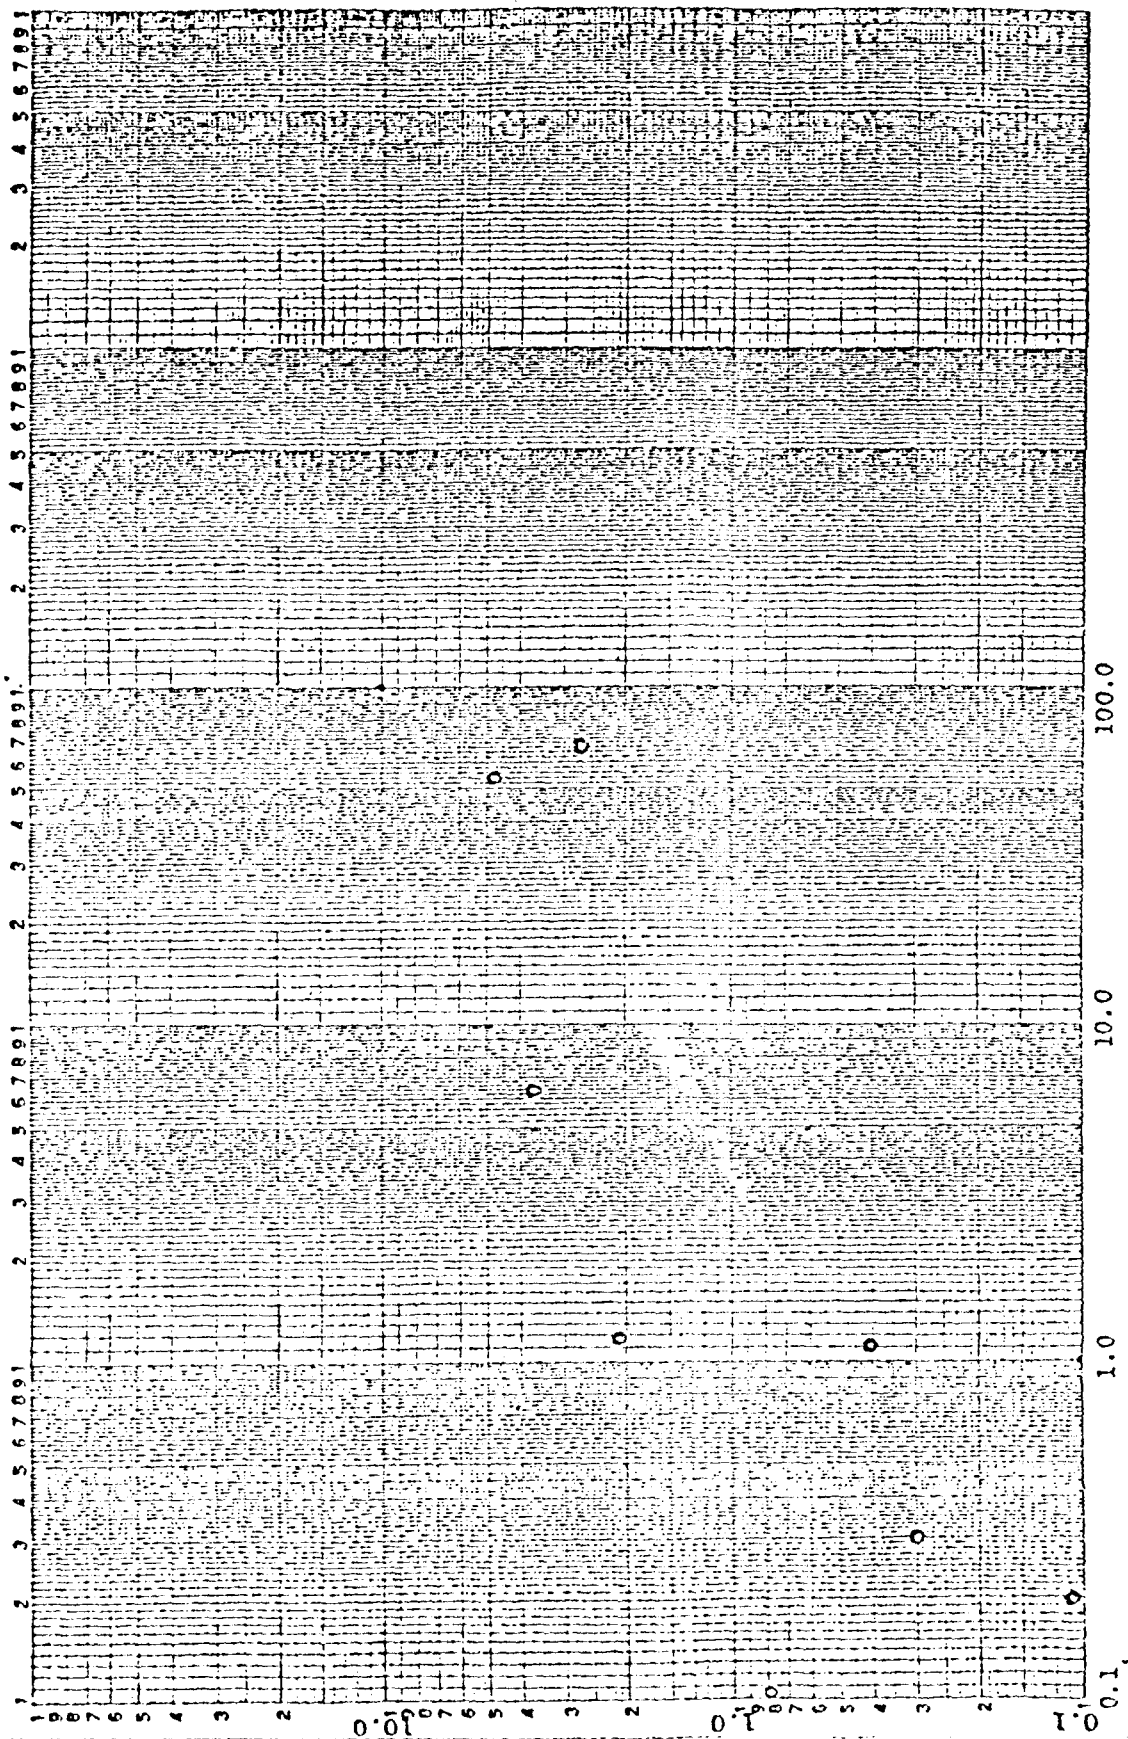

MICROGRAMS/CUBIC METER - ELECTRON MICROSCOPY