
D-c Magnetic Controllers — For Use on Surface Vessels (Continued)


Typical Wiring Diagrams (Continued)

ELEMENTARY DIAGRAM

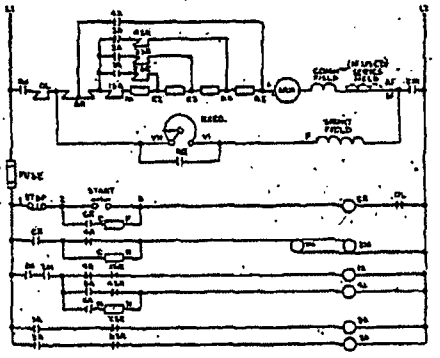

Size 6 non-reversing controller with low voltage protection, magnetic overload relay and field accelerating relay arranged for remote pushbutton control.


ELEMENTARY DIAGRAM

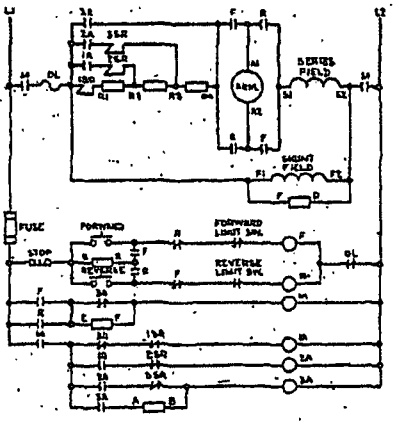

Size 3 Reversing controller with low voltage protection and thermal overload relay arranged for remote pushbutton control with limit switch protection.

Approximate Dimensions & Weights

Drip Proof Controllers — Constant Speed Type
Bulkhead Mounting

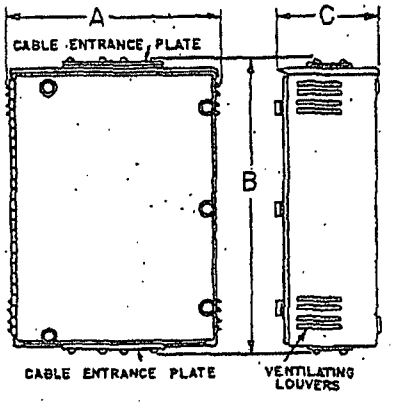

Navy Starter Size	Approximate Dimensions in Inches			Approximate Weight	
	A	B	C	Lbs. Net	Lbs. Gross
NON-REVERSING TYPE					
0	13½	15	10	45	55
1	14½	21	10	65	75
2	18½	25	10	100	110
3	20½	28	11	150	200
4	25½	31	14	200	300
REVERSING TYPE					
0	16½	17	10	60	.....
1	16½	23	10	80	.....
2	22½	28	10	120	.....
3	25½	30	12	180	.....
4	28½	34	15	250	.....

Continued

CUTLER 102/399
12/1/2006