

NOTICE: If the film image
is less clear than this
notice, it is due to the
quality of the document
being filmed

51

Painting
SPECIFICATIONS

COVERING THE USE OF

**DUTCH BOY
PRODUCTS**

00057

NLI 112914

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

NIJ 112915

00057

DUTCH BOY
"GOOD PAINT'S OTHER NAME"

"which painter's other name" is a statement often made in referring to Dutch line white lead. But it is more than just a claim. Actually it expresses the experience of thousands of architects, conservers and painters concerned who have specified or applied Dutch line white lead on many structures and buildings . . . who have watched Dutch line withstand years of weather exposure . . . who have seen Dutch line beautify the fine interiors.

Today, white lead is accepted as the standard in quality point. The specification of it is recognized as an estimate of a quality point for one that serves to both another's property and his pocket book.

THE PAINTING SPECIFICATIONS

There is a growing realization that the only way to ensure the future of the world is to ensure the future of the world's people. This is a goal that can only be achieved through the cooperation of all nations and peoples. The world is a global village, and we must work together to ensure its future. This is a goal that can only be achieved through the cooperation of all nations and peoples. The world is a global village, and we must work together to ensure its future.

There are no further items.

[illegible]

XEROX

NATIONAL LEAD COMPANY
111 BROADWAY, NEW YORK

OUTCH BOY PAINTING SPECIFICATIONS



THE DUTCH BOY LINE
A QUALITY LINE OF PAINT PRODUCTS

A quarter hour of radio production is scheduled under the British Broadcasting Corporation's plan.

To the architect this book has low where a definite book on the quality of roots included of poor historic materialism on these used as a quality of style and he tried to distinguish between "impair" a point's protective or decorative question to a degree one not all preservation to three a home personality.

Just think the picture is of the same high quality as the best materials . . . being used and replaced in a very brief period . . . based on the experience of some and not on the experience of others. Although attending primarily to the together, each also stands up as an individual in the same interest as the individual in the picture.

The full stack of the line makes the perspective of specific observations as he made "what he's thinking," furthermore, the presence in the job of the last line in one, and black customers, in others, more in.

QV37-2118M 208 B31A00

[illegible]

The terms "peace" and "order" refer to the confidence of the whole world in that a world war will not break out, but peace in which the hope of a world war is completely excluded. The peace of the world is not a peace of indifference, but a peace of interest. The peace of the world is not a peace of indifference, but a peace of interest. The peace of the world is not a peace of indifference, but a peace of interest.

710 QJTSNIT 208 H3100

the other, and then, finally, to the point of the end of the world. It is a very long and difficult journey, but it is a journey that is worth taking. It is a journey that is full of challenges and rewards, and it is a journey that is worth taking.

[illegible][illegible][illegible]


710 DIXIE AVE. LOS ANGELES

1. The first step is to identify the problem or question that needs to be addressed. This involves understanding the context and the specific requirements of the task.

THE UNIVERSITY OF CHICAGO

...on record by George Washington as being written and printed in the year 1780.

Very old items require good storage materials and sturdy "shelving".

[illegible]

NEED

Covering the Use of

SECTION A - PART I
GENERAL REQUIREMENTS

2. Materials

The painting contractor shall wrap his materials in one place in the building, so that each storage place shall be kept neat and clear and all damage therein or to its surroundings shall be made good and being taken on the same day or prior, viz. in no event at a later date, this sign shall be removed from the building over the person the owner of the work.

1. **Introduction**

2. CLOSING:
Two members of the building the printing company and
owner all paid up from all bonded stock, and shall have the
owner present for their public record in the work and shall
owner the equipment from the parties. He shall govern the

Working days

5. EXTENSION

The present contract shall not be extended to payment in case of the amount agreed upon as the amount for the same work.

by the publisher

12. PROTECTION OF WORK

1. **Introduction**

21. WORKINGMEN

For before you passing to them, all workers shall be discussed and free from debt, debt, poverty, sorrow, and all foreign influences and all parts where point towards the road shall be marked all with regularity as before.

The all point shall be yearly opened and thoroughly treated.

Ex. 1. The area of a parallelogram is 100 sq. units. Find the area of a triangle with the same base and height as the parallelogram.

1.4 The use of joint shall be applied on a wet or damp wall and in the case sand-jointing, v.e. in the sand bed.

ENTER FOR WALL PAPER

PITCH 101 LIQUID PAPER

ATTACH BOX 1250-1250

There are three colored reds, when passed through a press, to give highly colored reds; that is, reds containing more iron oxide. The colored reds are made with a lower iron oxide content than the iron oxide reds. The colored reds are made by adding a small amount of iron oxide to the iron oxide reds. The colored reds are made by adding a small amount of iron oxide to the iron oxide reds. The colored reds are made by adding a small amount of iron oxide to the iron oxide reds.

WHITE BOY BEING SEARCHED BY 6 GUARD BROWNS. Similar to No. 6 except for the addition of a small amount of cream that it was designed for use as a wound ointment. In light brown color containing impurities. Sold in 20-gallon drums; 2 gal. tin and gallon cans.

WHITE BOY LINED RED-HEAD NO. 7 BROWN BROWNS. Similar to No. 6 but contains more cream than No. 6 and is more sticky. It is wound ointment or a liniment. Sold in 20-gallon drums, 2 gal. tin and gallon cans.

[illegible]

CH BOY PAINTING SPECIFICATIONS

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

00057

NLI 112918

DUTCH BOY PAINTING SPECIFICATIONS

DUTCH BOY PAINTING SPECIFICATIONS

PAINTING METAL WHEN QUICK DRYING IS REQUIRED

Formula No. 10
Primer Coat: Zinc Chromate
Finish Coat: Zinc Chromate

1. This paint is used on metal surfaces which are to be painted with a quick drying paint. It is applied in a thin coat and dries rapidly.

2. The paint is applied in a thin coat and dries rapidly. It is used on metal surfaces which are to be painted with a quick drying paint.

3. The paint is applied in a thin coat and dries rapidly. It is used on metal surfaces which are to be painted with a quick drying paint.

4. The paint is applied in a thin coat and dries rapidly. It is used on metal surfaces which are to be painted with a quick drying paint.

5. The paint is applied in a thin coat and dries rapidly. It is used on metal surfaces which are to be painted with a quick drying paint.

6. The paint is applied in a thin coat and dries rapidly. It is used on metal surfaces which are to be painted with a quick drying paint.

7. The paint is applied in a thin coat and dries rapidly. It is used on metal surfaces which are to be painted with a quick drying paint.

8. The paint is applied in a thin coat and dries rapidly. It is used on metal surfaces which are to be painted with a quick drying paint.

9. The paint is applied in a thin coat and dries rapidly. It is used on metal surfaces which are to be painted with a quick drying paint.

10. The paint is applied in a thin coat and dries rapidly. It is used on metal surfaces which are to be painted with a quick drying paint.

PAINTING CONCRETE FLOORS

1. This paint is used on concrete floors which are to be painted with a quick drying paint. It is applied in a thin coat and dries rapidly.

2. The paint is applied in a thin coat and dries rapidly. It is used on concrete floors which are to be painted with a quick drying paint.

3. The paint is applied in a thin coat and dries rapidly. It is used on concrete floors which are to be painted with a quick drying paint.

4. The paint is applied in a thin coat and dries rapidly. It is used on concrete floors which are to be painted with a quick drying paint.

PAINTING WOOD FLOORS

1. This paint is used on wood floors which are to be painted with a quick drying paint. It is applied in a thin coat and dries rapidly.

2. The paint is applied in a thin coat and dries rapidly. It is used on wood floors which are to be painted with a quick drying paint.

3. The paint is applied in a thin coat and dries rapidly. It is used on wood floors which are to be painted with a quick drying paint.

4. The paint is applied in a thin coat and dries rapidly. It is used on wood floors which are to be painted with a quick drying paint.

5. The paint is applied in a thin coat and dries rapidly. It is used on wood floors which are to be painted with a quick drying paint.

6. The paint is applied in a thin coat and dries rapidly. It is used on wood floors which are to be painted with a quick drying paint.

7. The paint is applied in a thin coat and dries rapidly. It is used on wood floors which are to be painted with a quick drying paint.

8. The paint is applied in a thin coat and dries rapidly. It is used on wood floors which are to be painted with a quick drying paint.

9. The paint is applied in a thin coat and dries rapidly. It is used on wood floors which are to be painted with a quick drying paint.

10. The paint is applied in a thin coat and dries rapidly. It is used on wood floors which are to be painted with a quick drying paint.

PAINTING INTERIOR PLASTER

1. This paint is used on interior plaster which is to be painted with a quick drying paint. It is applied in a thin coat and dries rapidly.

2. The paint is applied in a thin coat and dries rapidly. It is used on interior plaster which is to be painted with a quick drying paint.

3. The paint is applied in a thin coat and dries rapidly. It is used on interior plaster which is to be painted with a quick drying paint.

4. The paint is applied in a thin coat and dries rapidly. It is used on interior plaster which is to be painted with a quick drying paint.

5. The paint is applied in a thin coat and dries rapidly. It is used on interior plaster which is to be painted with a quick drying paint.

NOTICE: If the film image is less clear than this notice, it is due to the quality of the document being filmed

00057

1764

GOOD PAINTING AND HOW TO ASSURE IT

The painter's work is the most important part of the building process. It is the only part of the building process that is visible to the public. The painter's work is the only part of the building process that is visible to the public. The painter's work is the only part of the building process that is visible to the public.


NOTES ON EXTERIOR PAINTING

Exterior painting is a complex task that requires a lot of preparation and attention to detail. The painter must first clean the surface of the wall or structure to be painted. This is done by washing the surface with a strong detergent and water. The surface must then be allowed to dry completely before any paint is applied. The painter must also choose the right type of paint for the job. Exterior paint must be able to withstand the elements of nature, such as rain, sun, and wind. The painter must also choose the right color for the job. The color should be chosen to complement the architecture of the building and the surrounding environment.



NOTES ON INTERIOR PAINTING

Interior painting is a more delicate task than exterior painting. The painter must first clean the surface of the wall or structure to be painted. This is done by washing the surface with a strong detergent and water. The surface must then be allowed to dry completely before any paint is applied. The painter must also choose the right type of paint for the job. Interior paint must be able to withstand the elements of nature, such as rain, sun, and wind. The painter must also choose the right color for the job. The color should be chosen to complement the architecture of the building and the surrounding environment.

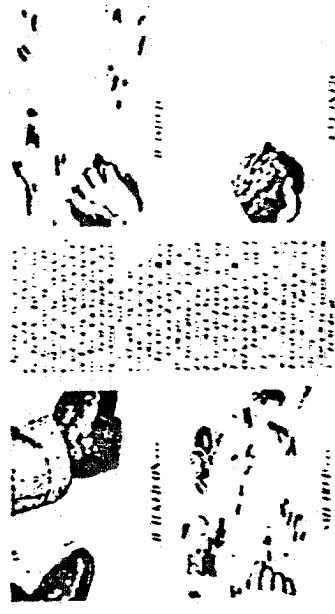

DUTCH BOY PAINTING SPECIFICATIONS

The specifications for Dutch Boy painting are as follows:

DUTCH BOY PAINTING SPECIFICATIONS

The specifications for Dutch Boy painting are as follows: