
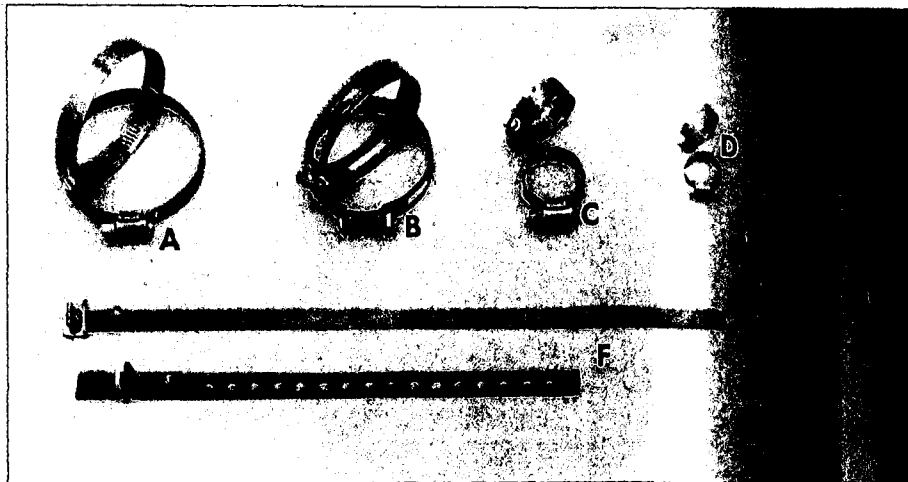


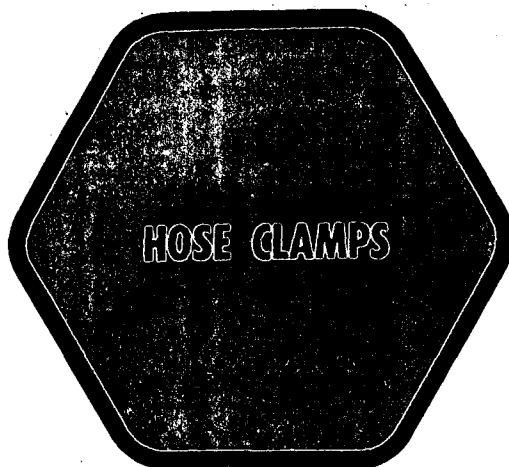

A. WORM GEAR TYPE

Safety collared design and hex screw design have stainless steel band and housing with cadmium plated screw. Snaplock screw design is all stainless steel.

SAFETY COLLARED DESIGN

Deep slotted screw has projecting collar for non-slip tightening.

HEX SCREW DESIGN

Has $\frac{3}{8}$ " slotted hex head for wrench or screw-driver tightening.

HEX SCREW DESIGN

Stainless Steel Band, housing and screw.

SNAPLOCK SCREW DESIGN

Snap swivel action screw down, take up slack—clamp is locked.

C. AIR CONDITIONER HOSE CLAMPS—WORM GEAR TYPE

Just 2 Sizes Take Care Of The 4 Sizes Of Hose On All Car Air Conditioners

Stainless steel band and housing with cadmium plated Hex Head Screw.

CLAMP NO.	PRICE	HOSE SIZES		CLAMP DIAMETER	
		Min.	Max.	Min.	Max.
4-4545	40¢	$\frac{5}{16}$ "	$\frac{3}{4}$ "	.4"	1"
4-4545	40¢	$\frac{13}{32}$ "	$\frac{29}{32}$ "	.4"	1"
4-4546	40¢	$\frac{1}{2}$ "	1"	.53"	1.37"
4-4546	40¢	$\frac{9}{16}$ "	1 $\frac{1}{16}$ "	.53"	1.37"

D. MINIATURE WORM GEAR CLAMPS

Holds Up To 1000 PSI With Only 10 Lbs. Screw Torque

Deep Slotted $\frac{1}{4}$ " Hex-Head Screw

Stainless steel band and housing with cadmium plated screw.

4-4540 Dia. Min. $\frac{3}{32}$ ", Max. $\frac{5}{8}$ "Price 32¢

4-4541 Dia. Min. $\frac{3}{16}$ ", Max. $\frac{7}{8}$ "Price 32¢

Stainless steel band, housing and screw.

4-4542 Dia. min. $\frac{3}{32}$ " max. $\frac{5}{8}$ "Price 43¢

4-4543 Dia. min. $\frac{5}{16}$ " max. $\frac{7}{8}$ "Price 43¢

E. UNIVERSAL TYPE HEATER HOSE CLAMP

One Size Fits All Heater Hose to $\frac{3}{4}$ in. diameter

—Easy to Install—Leak Proof

Replaces:

Chevrolet No. 3696820 Buick No. 1332330
Ford No. 18572

4-1213Price 18¢

F. UNIVERSAL WRAP AROUND TYPE

Universal adjustable clamps fit hoses up to 3 in. —takes care of all car and truck requirements. Flexible straps will conform to any shape. Use to replace many individual size clamps.

Clamp No.	Length	Hose Diameter	Price
4-1214	11 $\frac{1}{4}$ "	3"	17¢
4-1215	10 $\frac{1}{2}$ "	3"	16¢
4-1218	15"	4"	21¢
4-1219	24"	6 $\frac{1}{2}$ "	34¢

*Note: Due to variation of Ply and Wall thickness during recent years, correct clamp size should be determined by outside diameter of hose after fitting over connection. Given correct dimension, the proper size clamp will be furnished to insure a tight leak proof joint.

B. STANDARD TYPE

No.	Hose Size and Ply	A	B	C	D	PRICE
4-1220	$\frac{3}{8}$ " -2 Ply	$\frac{5}{8}$ "	$\frac{3}{8}$ "	$\frac{1}{2}$ "	$\frac{3}{4}$ "	10¢
4-1221	$\frac{3}{8}$ " -3 Ply	$\frac{11}{16}$ "	$\frac{3}{8}$ "	$\frac{1}{2}$ "	$\frac{3}{4}$ "	10¢
4-1222	$\frac{1}{2}$ " -2 & 3 Ply	$\frac{3}{4}$ "	$\frac{3}{8}$ "	$\frac{1}{2}$ "	$\frac{7}{8}$ "	10¢
4-1224	$\frac{1}{2}$ " -4 Ply	$\frac{7}{8}$ "	$\frac{3}{8}$ "	$\frac{1}{2}$ "	1"	10¢
4-1225	$\frac{5}{8}$ " -3 Ply	$\frac{13}{16}$ "	$\frac{3}{8}$ "	$\frac{1}{2}$ "	1"	10¢
4-1226	$\frac{5}{8}$ " -4 Ply	$\frac{11}{32}$ "	$\frac{3}{8}$ "	$\frac{1}{2}$ "	1"	10¢
4-1228	$\frac{3}{4}$ " -3 & 4 Ply	$\frac{13}{16}$ "	$\frac{1}{2}$ "	$\frac{1}{2}$ "	1"	10¢
4-1229	$\frac{7}{8}$ " -2 & 3 Ply	$\frac{13}{16}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "	$\frac{13}{16}$ "	10¢
4-1230	1" -2 & 3 Ply	$\frac{13}{16}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "	$\frac{13}{16}$ "	10¢
4-1239	$\frac{1}{2}$ " -3 Ply	$\frac{17}{16}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "	$\frac{13}{16}$ "	10¢
4-1241	$\frac{1}{2}$ " -3 Ply	$\frac{21}{32}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "	$\frac{13}{16}$ "	11¢
4-1242	$\frac{1}{2}$ " -4 Ply	$\frac{21}{32}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "	$\frac{13}{16}$ "	11¢
4-1243	$\frac{13}{16}$ " -3 & 4 Ply	$\frac{23}{16}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "	$\frac{13}{16}$ "	11¢
4-1246	2" -3 & 4 Ply	$\frac{23}{16}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "	$\frac{13}{16}$ "	11¢
4-1249	$\frac{23}{16}$ " -3 & 4 Ply	$\frac{23}{16}$ "	$\frac{1}{2}$ "	$\frac{5}{8}$ "	$\frac{13}{16}$ "	12¢