
PLAINTIFF'S EXHIBIT

USG-1820

DURABOND®
PASTE SPACKLING PUTTY

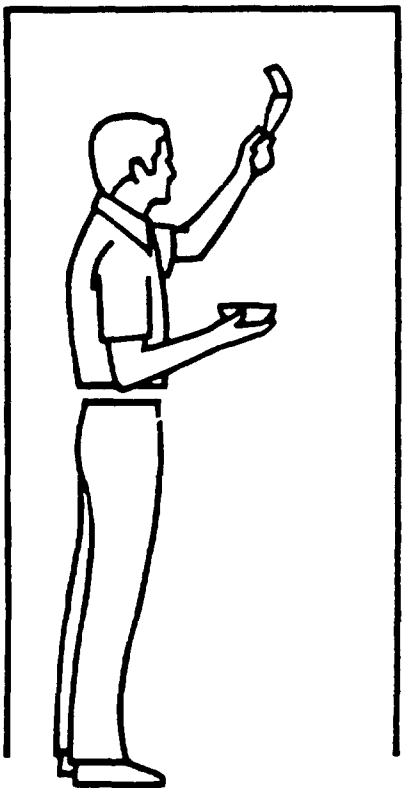

A ready-to-use, fast-drying vinyl compound for repairing blemishes in most interior surfaces

- **Factory-mixed for smooth consistency**
- **Easy to use, long-lasting**
- **Sands easily to a smooth surface**
- **Resists shrinkage and cracking**
- **No waste—simply close container for next use**

An all-purpose spackling putty, this polyvinyl acetate compound is ideal for general repair before painting or decorating. Used to fill and conceal nailholes, cracks, scars and other imperfections in interior surfaces of plaster, gypsum panels, wood; to level voids and slight imperfections in concrete. No waste—long working life. Dries to a hard, durable finish that sands easily and will not crumble. shrink or crack. Takes any standard primer and decoration.

GP035 1225

UNITED STATES GYPSUM

DURABOND PASTE SPACKLING PUTTY

PROPERTIES

Flammability:	**Nonflammable**
Consistency:	**Soft paste**
Thinning:	**No thinning required**
Drying Time:	**Hardens in a few hours**



Packaging: **1/2 pint (12 per case); 1 qt. (6 per case); 1 gal. (4 per case).**

DIRECTIONS FOR USE

SURFACE PREPARATION:
All surfaces must be sound, clean and dry. Remove dust, dirt, grease, loose particles and cracked or peeling paint.

APPLICATION:
Apply with broadknife, working putty into surface. Remove excess before putty hardens. Fill nicks and gouges with sweep of knife in one direction; remove excess compound in cross-direction. Sand smooth when compound is hard and dry.

CLEANUP AND STORAGE:
Clean tools thoroughly with warm, soapy water before putty hardens. Keep container closed when not in use.

LIMITED WARRANTY:
DURABOND Paste Spackling Putty is warranted against *manufacturing defects*. Should a manufacturing defect become evident, UNITED STATES GYPSUM COMPANY will supply, without charge, replacement spackling putty provided the spackling putty was applied according to current printed instructions. UNITED STATES GYPSUM reserves the right to validate any claim.

CAUTION: **Contains asbestos fibers. Avoid creating dust. Breathing asbestos dust may cause serious bodily harm.**

KEEP OUT OF THE REACH OF CHILDREN

GP035 1226

UNITED STATES GYPSUM
BUILDING AMERICA
101 South Wacker Drive, Chicago, Illinois 60606