


ONE

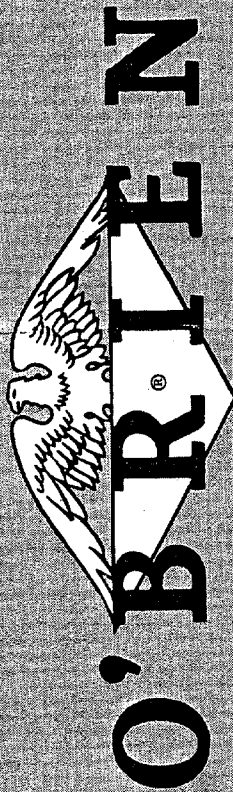

GALLON

"76"

EXTERIOR EGGSHELL
PAINT

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

OLIVE

MADE BY THE O'BRIEN CORPORATION

SOUTH BEND, IND. • BALTIMORE, MD.

• OKLAHOMA CITY, OKLA. • SAN FRANCISCO, CAL. • LOS ANGELES, CA

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work — One coat will do an excellent job.
- 2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil. Do not add oil where high humidity tends to retard drying.

2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

REGISTERED

REGN. No. RC2513

DATE 7-19-62

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles*

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

DANGER!

HAZARDOUS OR FATAL IF


SWALLOWED

CONTAINS LEAD. DO NOT INDUCE VOMITING. Do not apply on window sills, toys, furniture, or interior surfaces of rooms which may be used by children. USE WITH ADEQUATE VENTILATION. Avoid prolonged contact with skin and breathing of vapor or spray mist. Wash thoroughly after handling and before eating or smoking. Keep away from heat and open flame. Close container after each use. KEEP OUT OF THE REACH OF CHILDREN.

"75" EGGSHELL-OLIVE
Pigmentary Oxide 47.14%
Titanium Dioxide 15.02%
Zinc Oxide 1.00%
C. F. Yellow Iron Oxide 2.04%
Carbon Black 2.04%
Chromium Oxide 4.54%
C. F. Chrome Yellow 4.54%
Silica 100.00%
Vehicle Linseed Oil 11.54%
Lead Trioxide 2.72%
Lead Trioxide 2.72%
Acrylonitrile 18.00%
Aluminum Pigment & Drier 100.00%

ONE

GALLON

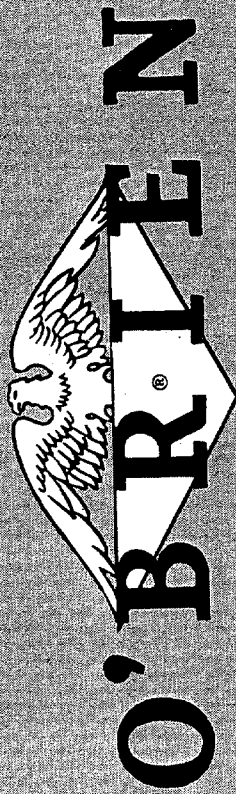

"76"

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

SIERRA SLATE

MADE BY THE O'BRIEN CORPORATION
SOUTH BEND, IND. • BALTIMORE, MD. • OKLAHOMA CITY, OKLA. • SAN FRANCISCO, CAL. • LOS ANGELES, CAL.

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work — One coat will do an excellent job.
- 2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

- 1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil. Do not add oil where high humidity tends to retard drying.
- 2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles *

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

DANGER!

HARMFUL OR FATAL IF

SWALLOWED


CONTAINS LEAD. DO NOT INDUCE VOMITING. Do not apply on window sills, toys, furniture, or interior surfaces of rooms which may be used by children. USE WITH ADEQUATE VENTILATION. Avoid prolonged contact with skin and breathing of vapor or spray mist. Wash thoroughly after handling and before eating or smoking. Keep away from heat and open flame. Close container after each use. KEEP OUT OF THE REACH OF CHILDREN.

75 EGGSHELL — STEREA SLATE	44.20%
Lead	10.40%
Thiuron Zinc Oxide	15.80%
Carbon Black	8.70%
C.P. Chrome Yellow	4.30%
Silicates	57.20%
Vehicle	100.00%
Raw Unseeded Oil	55.60%
Modified Zinc Alkyd Resin	1.70%
Modified Zinc Alkyd Resin	2.10%
Modified Zinc Alkyd Resin	3.30%
Modified Zinc Alkyd Resin	4.00%
Modified Zinc Alkyd Resin	49.80%
Modified Zinc Alkyd Resin	100.00%

ALBANY PRESS

REGISTERED
RECN. No. 1-19-63
DATE

ONE



O'BRIEN

"75"

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

BUD GREEN

MADE BY THE O'BRIEN CORPORATION
SOUTH BEND, IND. • BALTIMORE, MD. • OKLAHOMA CITY, OKLA. • SAN FRANCISCO, CAL. • LOS

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work — One coat will do an excellent job.
- 2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

- 1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil. Do not add oil where high humidity tends to retard drying.
- 2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

REGISTERED

REC'D No. 1022513

DATE 1-19-62

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles *

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.


DO NOT TAKE INTERNALLY
DANGER!
HARMFUL OR FATAL IF SWALLOWED

CONTAINS LEAD. DO NOT INDUCE VOMITING. Do not apply on window sills, toys, furniture, or interior surfaces of rooms which may be used by children. USE WITH ADEQUATE VENTILATION. Avoid prolonged contact with skin and breathing of vapor or spray mist. Wash thoroughly after handling and before eating or smoking. Keep away from heat and open flame. Close container after each use. KEEP OUT OF THE REACH OF CHILDREN.

"75" EGGSHELL - MID GREEN	
Pigment	47.15%
Triphenyltin Dilaurate	27.25%
Triphenyltin Dilauroate	11.33%
Chlorinated Paraffin	11.33%
Silica Filled with Oxide	3.14%
Silicates	97.74%
	100.00%
Vehicle	
New Linseed Oil	11.45%
Heat Treated Linseed Oil	1.50%
Triphenyltin Dilauroate	1.50%
Triphenyltin Dilaurate	3.44%
Chlorinated Paraffin	10.88%
Aromatic Solvent	30.88%
Aluminum Distearyl Sulfate	100.00%

ALBANY PORT

ONE



O'BRIEN

"75"

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SID

GREEN BALSAM

MADE BY THE O'BRIEN CORPORATION
SOUTH BEND, IND. • BALTIMORE, MD. • OKLAHOMA CITY, OKLA. • SAN FRANCISCO, CAL. •

REGISTERED

REC'D No. 2513

DATE 7-19-62

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work — One coat will do an excellent job.
- 2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

- 1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil. Do not add oil where high humidity tends to retard drying.
- 2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles *

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

DANGER!


HARMFUL OR FATAL IF

SWALLOWED

CONTAINS LEAD. DO NOT INDUCE VOMITING. Do not apply on window sills, toys, furniture, or interior surfaces of rooms which may be used by children. USE WITH ADEQUATE VENTILATION. Avoid prolonged contact with skin and breathing of vapor or spray mist. Wash thoroughly after handling and before eating or smoking. Keep away from heat and open flame. Close container after each use. KEEP OUT OF THE REACH OF CHILDREN.

"75" EGGSHELL GREEN BALSAM
Pigment 77%
Lead Oxide 1.21%
Cadmium Oxide 1.45%
Zinc Oxide 1.45%
Titanium Dioxide 1.45%
Silicates 27.07%
Vehicle 100.00%
Modified Saponified Resin 5.50%
Aluminum Oxide 9.21%
Aluminum Hydroxide 9.21%
Mineral Spirits & Driers 100.00%

ONE



O'BRIEN

"75"

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

SUNCREST

MADE BY THE O'BRIEN CORPORATION
SOUTH BEND, IND. • BALTIMORE, MD. • OKLAHOMA CITY, OKLA. • SAN FRANCISCO, CAL. •

REGISTERED

REC'D. No.

DATE

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

1 Coat Work — One coat will do an excellent job.
2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil. Do not add oil where high humidity tends to retard drying.

2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles *

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

DANGER!

HARMFUL OR FATAL IF

SWALLOWED


CONTAINS LEAD. DO NOT INDUCE VOMITING. Do not apply on window sills, toys, furniture, or interior surfaces of rooms which may be used by children. **USE WITH ADEQUATE VENTILATION.** Avoid prolonged contact with skin and breathing of vapor or spray mist. Wash thoroughly after handling and before eating or smoking. Keep away from heat and open flame. Close container after each use. **KEEP OUT OF THE REACH OF CHILDREN.**

75 EGGSHELL - SUNCREST
Pigment
AZO Nickel Yellow 20.00%
Titanium Dioxide 8.00%
100% Zinc Oxide 28.54%
Silicates 43.46%

VEHICLE
Modified Sora Alkyd Resin 25.00%
New Treated Oil 15.00%
New Treated Linseed Oil 21.00%
Alkylated Spirits & Triers 25.00%
Aromatic Hydrocarbons 10.00%
100.00%

ONE

GALLON

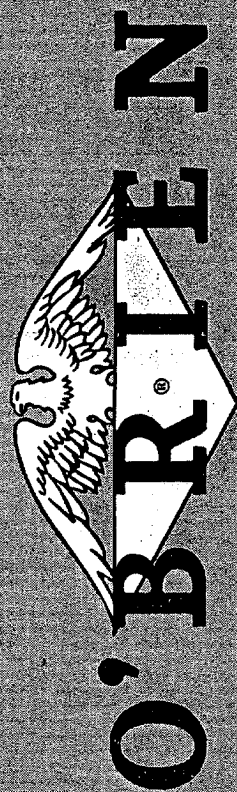

"75"

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

CORAL CLOUD

MADE BY THE O'BRIEN CORPORATION
SOUTH BEND, IND. • BALTIMORE, MD. • OKLAHOMA CITY, OKLA. • SAN FRANCISCO, CAL. • LOS ANGELES, CAL.

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work — One coat will do an excellent job.
- 2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

- 1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil. Do not add oil where high humidity tends to retard drying.
- 2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles *

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

DANGER!

HARMFUL OR FATAL IF

SWALLOWED


CONTAINS LEAD. DO NOT INDUCE VOMITING. Do not apply on window sills, toys, furniture, or interior surfaces of rooms which may be used by children. USE WITH ADEQUATE VENTILATION. Avoid prolonged contact with skin and breathing of vapor or spray mist. Wash thoroughly after handling and before eating or smoking. Keep away from heat and open flame. Close container after each use. KEEP OUT OF THE REACH OF CHILDREN.

75 EXTERIOR EGGSHELL - TINT BASE
Pigment from Oxide 18.60%
100% Leadless Zinc Oxide 21.30%
Titanium Dioxide 20.00%
Silicates 40.10%
Total 100.00%
Vehicle
New Treated Linseed Oil 50.75%
New Treated Linseed Oil 25.00%
Aluminum Sulphate & Briers 10.00%
Total 85.75%
Less than 5% Thinning Colors added.

DATE _____
REGN. No. _____
R M Q - 1 2 3 4 5 6 7 8 9 0

ALBANY PRESS

ONE



O'BRIEN

"75"

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

ICEBERG

MADE BY THE O'BRIEN CORPORATION
SOUTH BEND, IND. • BALTIMORE, MD. • OKLAHOMA CITY, OKLA. • SAN FRANCISCO, CAL. • LOS ANGELES, CAL.

REGISTERED

REC'D. No. 11/19/72

DATE

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

1 Coat Work — One coat will do an excellent job.
2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil. Do not add oil where high humidity tends to retard drying.
2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles *

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

DANGER!

HARMFUL OR FATAL IF

SWALLOWED

CONTAINS LEAD. DO NOT INDUCE VOMITING. Do not apply on window sills, toys, furniture, or interior surfaces of rooms which may be used by children. USE WITH ADEQUATE VENTILATION. Avoid prolonged contact with skin and breathing of vapor or spray mist. Wash thoroughly after handling and before eating or smoking. Keep away from heat and open flame. Close container after each use. KEEP OUT OF THE REACH OF CHILDREN.


75 EXTERIOR EGGSHELL — TINT BASE
Pigment 41.00%
Extender 25.00%
100% Lead-Zinc Oxide 25.00%
Titanium Dioxide 9.00%

Vehicle 15.00%
Thinner 15.00%
House Paint Primer 15.00%
House Paint Primer Thinner 15.00%
House Paint Primer Thinner 15.00%
House Paint Primer Thinner 15.00%

Least than 2% Tinting Colors added.

ONE

GALLON

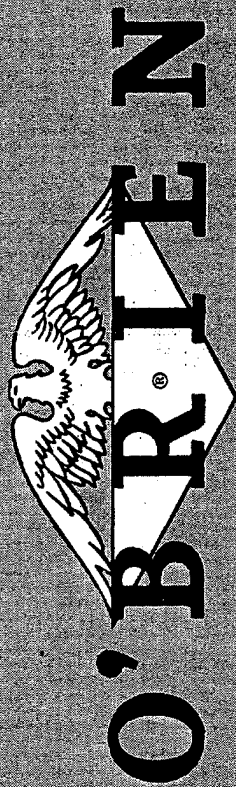

"75"

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

TUMBLEWEED

MADE BY THE O'BRIEN CORPORATION
SOUTH BEND, IND. • BALTIMORE, MD. • OKLAHOMA CITY, OKLA. • SAN FRANCISCO, CAL. • LOS ANGELES, CAL.

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles; Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

1 Coat Work — One coat will do an excellent job.
2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil. Do not add oil where high humidity tends to retard drying.

2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

REGISTERED

REC'D No. 18512

DATE 5/11/62

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles*

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles; unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

DANGER!

HARMFUL OR FATAL IF

SWALLOWED


CONTAINS LEAD. DO NOT INDUCE VOMITING. Do not apply on window sills, toys, furniture, or interior surfaces of rooms which may be used by children. USE WITH ADEQUATE VENTILATION. Avoid prolonged contact with skin and breathing of vapor or spray mist. Wash thoroughly after handling and before eating or smoking. Keep away from heat and open flame. Close container after each use. KEEP OUT OF THE REACH OF CHILDREN.

25 EXTERIOR EGGSHELL — TINT BASE
Titanium Dioxide 44.40%
Zinc Oxide 28.30%
Zinc Silicate 15.40%
Zinc Oxide 11.90%
Less than 5% Tinting Colors added.

Vehicle
New Unmixed Oil 12.11%
New Unmixed Linseed Oil 20.00%
New Unmixed Turpentine 100.00%
Less than 5% Tinting Colors added.

ALBANY PRESS

ONE



O'BRIEN

"75"

**EXTERIOR EGGSHELL
PAINT**

FOR WOOD AND ASBESTOS SHINGLES • MASONRY • SIDING

ORIENTAL SAND

MADE BY THE O'BRIEN CORPORATION
SOUTH BEND, IND. • BALTIMORE, MD. • OKLAHOMA CITY, OKLA. • SAN FRANCISCO, CAL. • L

"75" EXTERIOR EGGSHELL

Low-lustre "75" Exterior Eggshell — the all-purpose outside house paint — may be used over wood and unglazed asbestos shingles, stucco, concrete, masonry, metal, wood siding and trim. Fortified with exclusive Pre-Shrunk Oils, "75" Exterior Eggshell offers perfect one coat hiding, smooth easy application and a unique, blister resistant film.

"75" EXTERIOR EGGSHELL PAINT SEALER — Clear sealer to be mixed with Exterior Eggshell and used as a primer over porous masonry, stucco and concrete surfaces where three coats may be desired or necessary.

DIRECTIONS FOR USE

Wood Shingles, Siding, Trim and Unglazed Asbestos Shingles (Previously Painted)

- 1 Coat Work — One coat will do an excellent job.
- 2 Coat Work — If the film is in bad condition, use a prime coat of "75" House Paint Primer tinted to approximate shade of finish coat and finish with "75" Exterior Eggshell, used as it comes from the can.

Wood Shingles, Siding, Trim (New, Unpainted)

1st Coat — "75" House Paint Primer, tinted to approximate shade of finish coat. Thin with two or three pints of linseed oil. Do not add oil where high humidity tends to retard drying.

2nd Coat — "75" Exterior Eggshell, used as it comes from the can.

New Stucco, Concrete, Masonry and Unpainted, Unglazed Asbestos Shingles *

1st Coat — A-R Primer, tinted to approximate shade of finish coat with Tone-All colors (not to exceed 2 ounces per gallon).

2nd Coat — "75" Exterior Eggshell, used as it comes from the can. (If the finish coat is a deep color to be used over new stucco, concrete or masonry, an intermediate sealing coat is recommended. Use an equal part mixture of Exterior Eggshell Paint Sealer and Exterior Eggshell Paint.)

*NOTE: "75" Exterior Eggshell is not recommended for use over unpainted asbestos shingles, unless the shingles have been weathered at least five years. Do not use it over glazed type asbestos shingles. Allow new masonry to age six months before painting. Do not paint wet or chronically damp masonry with Exterior Eggshell.

Application — Surface should be perfectly dry and free of grease, oil, dust and loose dirt. To retard drying during hot weather, add one pint of "75" Exterior Eggshell Thinner to each gallon. Thinning is not recommended except to retard drying time. Allow at least 48 hours good drying weather between coats. Stir paint well before and during use.

DO NOT TAKE INTERNALLY

DANGER!

HARMFUL OR FATAL IF

SWALLOWED

CONTAINS LEAD. DO NOT INDUCE VOMITING. Do not apply on window sills, toys, furniture, or interior surfaces of rooms which may be used by children. USE WITH ADEQUATE VENTILATION. Avoid prolonged contact with skin and breathing of vapor or spray mist. Wash thoroughly after handling and before eating or smoking. Keep away from heat and open flame. Close container after each use. KEEP OUT OF THE REACH OF CHILDREN.

75 EXTERIOR EGGSHELL — TINT BASE
Premium Disinfectant 20.00%
100% Leadless Zinc Oxide 25.00%
Starch 25.00%
100.00%
Vehicle: Tinted Oil 10.00%
Heat Treated Linseed Oil 20.00%
Aluminum Spirits & Driers 25.00%
100.00%
Less than 5% Tinting Colors added.

REC'D 12/10/67
REG'N. No. 1217513
DATE 1/10/67