6 times THE POWER OF ORDINARY SOLENOID VALVES



GENERAL CONTROLS
K-10 SERIES
ELECTRO-MAGNETIC
LEVER VALVES

CONTROLS LIGHT AND HEAVY OILS, AIR, WATER, GAS, STEAM, REFRIGERANTS, etc. Suitable for pressures up to 1000 pounds and temperatures up to 400° F.

SIX TIMES THE POWER of ordinary solenoids assures high seating pressure and overcomes the blocking effect of viscous fluids, such as heavy fuel oil. Adequate power of solenoid insures positive operation. Normally closed or open types available.

Internal valve assembly can be removed for cleaning and inspection if necessary. Two-wire—A.C. or D.C.—current failure—packless construction—bronze body—stainless steel and bronze internal parts—soft seats available.

FOR COMPLETE SPECIFICATIONS request new Catalog.

GENERAL CONTROLS
801 ALLEN AVENUE GLENDALE 1, CALIF.
Manufacturers of Automatic Pressure, Temperature, Level & Flow Controls

Phil Swain
invites you to visit
the POWER booth
(No. 42) at the
New York Power Show

•

GRAND CENTRAL PALACE,
NEW YORK
NOVEMBER 29 - DECEMBER 4

Leffel BOILERS FOR INDUSTRY

GENERATE DRY LOW COST STEAM WITH THE PROVEN SERVICE AND SAFETY OF THE LEFFEL SCOTCH TYPE BOILER, WITH COAL, OIL OR GAS.

NOT A ONE FUEL BOILER—but readily adapted for burning COAL (Either hand fired (Fig. No. 1) or with the specially designed Leffel Automatic Underfeed Stoker.) (Figure No. 3.)

The Leffel Boiler can also be quickly changed to fully or semi-automatic OIL or GAS firing. (See Figure No. 2.)

BACKED BY 86 YEARS OF BOILER BUILDING EXPERIENCE—THOROUGHLY PROVEN—BEYOND THE EXPERIMENTAL STAGE!

HAND FIRED COAL




FIGURE 1

OIL OR GAS FIRED




FIGURE 2

NEAT . . . COMPACT . . . SAFE . . . RELIABLE

Quickly and Easily Installed

STOKER FIRED




FIGURE 3

AVAILABLE IN SIZES 6 HP. TO 250 HP. THESE ARE NORMAL STANDARD COMMERCIAL (NOT INFLATED) RATINGS—AND THESE BOILERS ARE GENEROUSLY designed for OVERLOAD capacity. Built with PLUS qualities exceeding ASME and State Boiler Code Requirements.

Write — Wire — or Phone us for full particulars.


BULLETINS SENT ON REQUEST

THE JAMES LEFFEL & CO.
Established 1862
BOX P-48 SPRINGFIELD 99, OHIO

Leffel Boilers are Standard Equipment in Many Thousands of Successful and Profitable Installations Where Production of Dry, Low Cost Steam is a Prime Necessity.

Scotch Type Boilers can be SUCCESSFULLY Stoker Fired. (See Fig. No. 3.) We build Stokers exclusively for Scotch Type Boilers.

THE J. I. CASE TRACTOR WORKS
SELECTS A
DUPLICATE GENERATOR

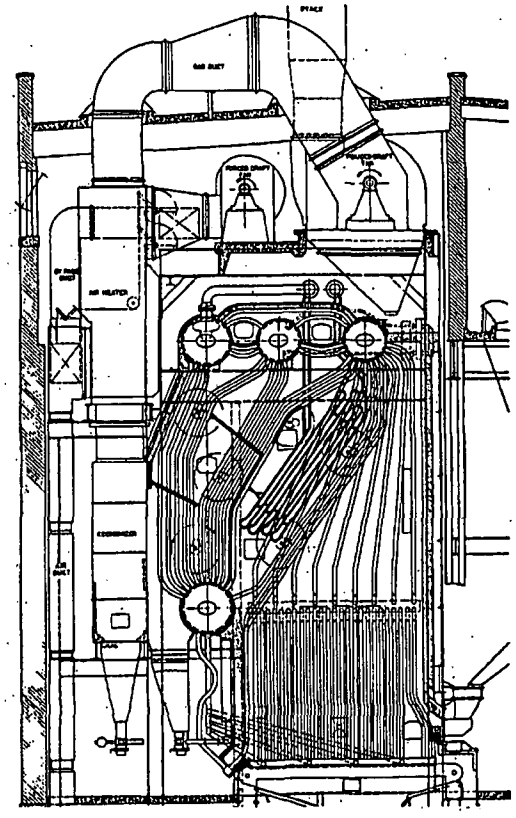

Cross-section of one unit installed at J. I. Case

To generate steam at the modernized tractor works of the J. I. Case Company, Racine, Wisconsin, a 75,000 #/hr Murray Steam Generator was purchased in 1942. To provide for further expansion, a duplicate of this unit was recently purchased. What better testimonial could there be regarding the performance and efficiency of this unit.

Operating at 450 pounds pressure 750° F. total temperature, these units will carry peak loads over 100,000 pounds per hour each. Fueled with 25% coal and 75% coke breeze these boilers show an average operating efficiency of over 85%, saving over $100.00 per unit per day in fuel.

SIMILAR INSTALLATIONS NOW BEING MADE AT:

City of Ames, Iowa
City of Webster City, Iowa
City of Hannibal, Missouri
City of Sibley, Iowa
City of Chillicothe, Missouri
City of Mt. Pleasant, Iowa
City of Cedar Falls, Iowa
City of Alliance, Nebr.

Be sure to ask for data on MURRAY boilers. A wide range of sizes is available for your modernization or expansion plans.

• • •

MURRAY ALSO Produces:

Steam Turbine Generators to 2,500 KW rating
High Speed Reduction Gears
Multistage Type "UV" Turbines
Single Stage Mechanical Drive Type "U" Turbines
Vertical Turbines

MURRAY IRON WORKS COMPANY
BURLINGTON, IOWA
BUILDERS OF STEAM POWER EQUIPMENT FOR THREE-QUARTERS OF A CENTURY