


One Gallon Round AXX-XX WV 1 2 3 4 5 6 7 8 9 10 11 12

REGISTERED	
REG'N. No.	30460
Code No.	01770
Date	5-8-72

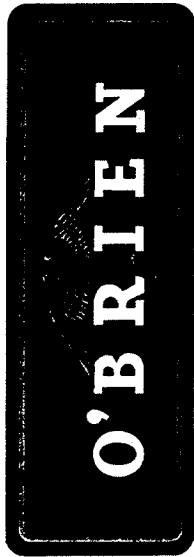

ALKYD TRAFFIC PAINT

PAINT, ALKYD - YELLOW
100.00%
Yellow
76.45%
23.55%
100.00%
43.73%
24.71%
73.59%
100.00%
(CPTWA)

DANGER!
EXTREMELY
FLAMMABLE
See cautions
elsewhere on label.

A82-06 YELLOW

NET 128 FL. OZ. (1 GAL.)

N21603

ALKYD TRAFFIC PAINT

O'Brien's Alkyd Traffic Paint is a medium-fast-dry marking paint for concrete, brick and bituminous surfaces.

At a recommended application temperature of 70° F., dries free from 'traffic pick-up' in 20-30 minutes; hard in 45 minutes. Excellent leveling, definition, color retention and adhesion.

Application — Machine spray is recommended. May also be applied by brush. Surface should be clean and dry.

Thinning — Wherever possible, apply at package consistency for maximum durability and for best resistance to 'bleeding' when applied over asphalt surface. During hot weather, may be reduced up to 10% with light naphtha for brush application.

Use of Beads — Beads may be added by dropping onto the paint within 5-10 minutes after application.

*"Be Sure The Paint You're
Buyin' Is O'Brien"*

CAUTION!

CONTAINS LEAD. HARMFUL IF SWALLOWED. Keep away from heat, sparks and open flame. Do not apply on window sills, toys, furniture or interior surfaces of rooms which may be used by children. Avoid prolonged contact with skin and breathing of vapor or spray mist. Close container after each use. Use with adequate ventilation. KEEP OUT OF THE REACH OF CHILDREN.

15

SINCE

O'BRIEN

1875

MADE BY THE O'BRIEN CORPORATION

SOUTH BEND IND • BALTIMORE MD • OKLAHOMA CITY OKLA • LOS ANGELES CAL • BRUNSWICK GA.