



15% Barium Sulphate
15% Barium Carbonate
25% Aluminium Silicate
25% Organic Colouring Matter
R276

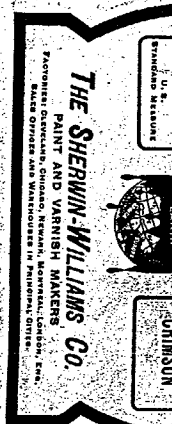

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full, even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats.
U218 C9 1626

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full, even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats.
U218 C9 1626

ENAMELOID PRIMROSE
Contents of Can:
Primer by weight..... 45%
Liquid by weight..... 45%
The Liquid is Varnish. 30%
The Primer is Zinc Oxide
thinned with Citron Yellow.
R278

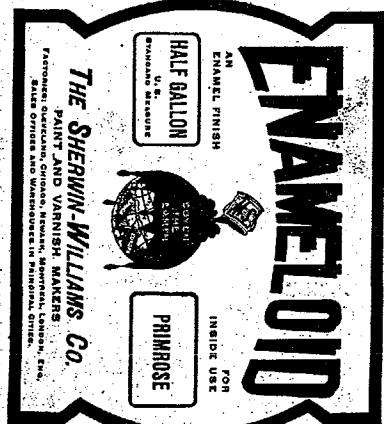

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full, even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats.
U218 L10 63

DIRECTIONS—Stir thoroughly from bottom of can. Be sure that the surface is dry and free from grease and dirt. Apply in full, even coats with a soft bristle brush. If necessary, thin with a little pure spirits of turpentine only. Allow 24 hours between coats.
U218 L10 63

7-SWP-0053407
N15068