


1946



35 72-
A
012

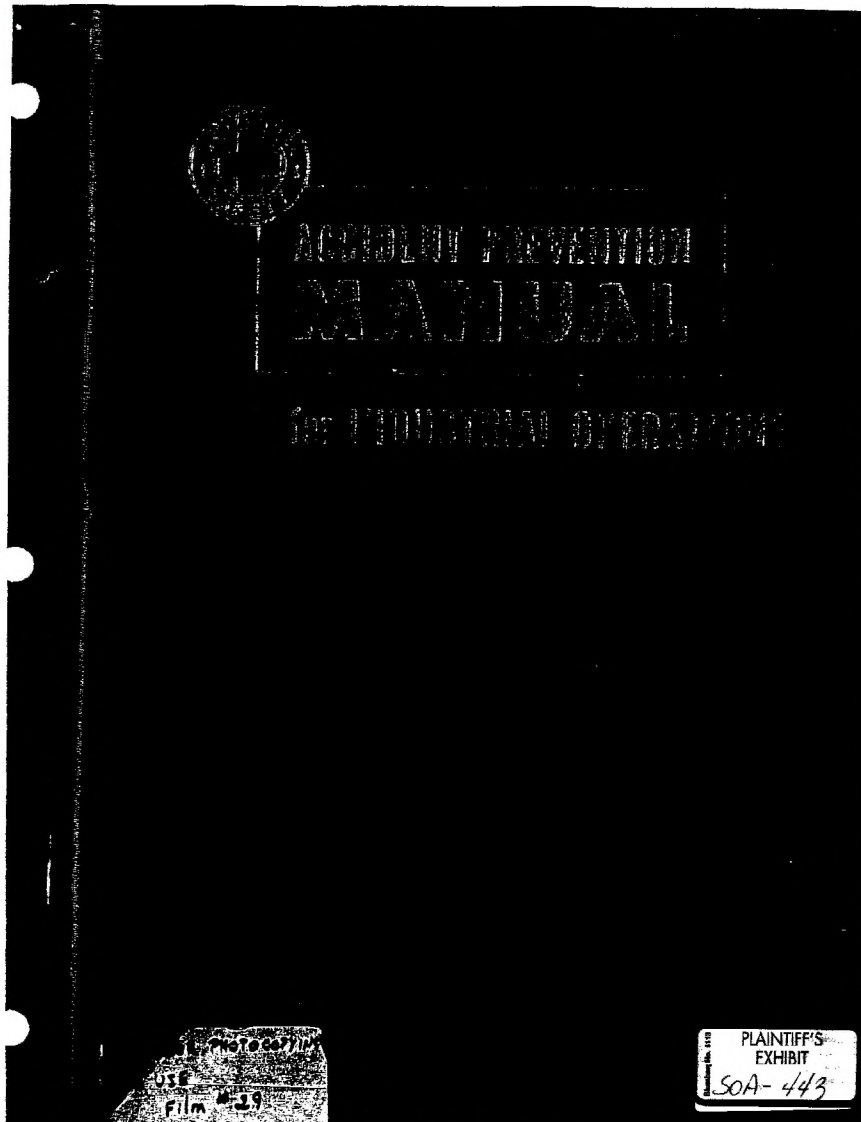


ACCIDENT PREVENTION

MANUAL

FOR INDUSTRIAL OPERATIONS



B69-0105



THIS **MANUAL** is published by
the National Safety Council as a part of the service
materials provided for its industrial members.

The MANUAL is revised from time to time. The
comment of its users is therefore solicited in matters
of accuracy and completeness, particularly in regard
to hazards arising from the introduction into
industry of new materials, new equipment and new
processes.

ACCIDENT PREVENTION

MANUAL

FOR INDUSTRIAL OPERATIONS

including a statement of methods used in setting up a safety organization, of means used to enlist employee co-operation, and of materials and services offered by the National Safety Council.

Prepared by the engineering staff of the Industrial Division, National Safety Council, with assistance from the Statistical and Traffic and Transportation Divisions on problems relating to their fields.

Especial appreciation is due the many members of the Manual Committee and to other consultants, who examined preliminary drafts and proofs, and who gave invaluable advice by correspondence and in conference.

Printed by Wm. H. Pool Co.
Chicago, Illinois
1946

FOREWORD

For some years there has been need for a compact source of basic information on accident prevention in industry. The body of safety engineering knowledge has expanded tremendously since the first concerted efforts were made at the beginning of the century to reduce industrial losses. The National Safety Council and many other agencies have in the interim published the result of their experience and research in many forms.

Until the publication of this book there has not been, however, one volume which has presumed to serve as a ready reference which would put the safety director immediately on the trail of the answer to all but the most unusual of his safety problems.

The Safe Practices Pamphlets and Data Sheets, long established as technical publications of the National Safety Council, give more extensive discussion to accident prevention problems than does the MANUAL. They are valuable complements to the MANUAL, but in no sense are they superseded by it.

Obviously no volume could encompass the details of accident prevention engineering for every industrial operation, nor even for the operations common to most industries. Industrial safety in specific application means close analysis of the operation in question, the design and control of equipment and environment so as to reduce the hazard, and the training of the employee toward safe attitudes and practices. The variables of safety in action are infinite. They can be discussed and illustrated in a single volume only in terms of certain common characteristics.

The MANUAL is not a textbook covering the general field of accident prevention theory, nor does it attempt to include the special problems of specialized industries. Neither does it attempt to discuss ways and means by which the employer can properly deal with the off-job hazards of his employees or participate in the public safety problems of his community. The engineering problems of many special industries, and highway, home and farm safety programs are more appropriately a part of other Council publications.

The MANUAL is a comprehensive source of the "how" of safety, intended to be kept at hand for frequent and ready reference by the safety director, the safety engineer and the foreman. It sets forth the principles of safety for activities in which the great majority of manufacturing industrialists engage. It carries these principles into as much detail as it can without contradicting the premise stated above that the application of accident prevention methods to the specific job must remain the responsibility of the engineer. Such application necessarily involves a degree of ingenuity and executive capacity as well as the extensive use of technical materials from the National Safety Council and from other sources.

TABLE VII. TABLE OF CHEMICAL HAZARDS
(See paragraphs immediately preceding Table)

Substance	Flash point ° F	Explosive limits % by volume		Auto- ignition temperature ° F	Probable safe concentration for 8 hr. exposure	Usual mode of entrance to body	Signs and symptoms of poisoning
		Lower	Upper				
acetaldehyde	17	1.6	57	365	less toxic than formaldehyde	inhalation	Irritation of eyes and respiratory tract, cough, difficult breathing, night sweats
acetanilide	345				less toxic than aniline	inhalation, ingestion	Blueness of lips and fingertips, confusion, dizziness.
acetic acid	104	4.0		1050			Powerful skin irritant
acetone	0	2.55	12.8	1000	200 p.p.m. ^{1,2}	inhalation	Irritation of skin, eyes, and upper respiratory tract.
acetylene	gas	2.5	80	935	none adopted, extremely low toxicity	inhalation	Headache, nausea, suffocation at very high concentrations.
acrolein					<1.0 p.p.m. ¹	inhalation	Extreme irritation of the eyes, skin and respiratory tract.
acrylonitrile	32	3.05		898	20 p.p.m. ¹	inhalation	Hydrogen cyanide effect due to decomposition in body.
aluminum (powder)		0.45 oz./cu ft.		1385	none adopted		
ammonia	gas	16	25	1204	100 p.p.m. ¹	inhalation	Severe irritation of eyes and re- spiratory passages, cough, caustic action on skin.
amyl acetate	76	1.1		714	100 p.p.m. ^{1,2}	inhalation	Irritation of eyes and respiratory tract, headache and dizziness, cough, nausea.
amyl alcohol	100	1.2		700	100 p.p.m. ²	inhalation	Same as amyl acetate.
aniline	168			1000	5 to 7 p.p.m. ²	absorption through skin, inhalation or ingestion	<i>Acute:</i> weakness, dizziness, blue- ness of lips, fainting, possible death. <i>Chronic:</i> disturbances of equilib- rium, nausea, vomiting, diarrhea, depression, and weariness.

12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

TABLE OF CHEMICAL HAZARDS *Continued*

Flash point	Explosive limits	Auto- ignition temperature	Probable safe concentration for	Usual mode of entrance to body	Signs and symptoms of poisoning

TABLE OF CHEMICAL HAZARDS *Continued*

Substance	Flash point °F	Explosive limits % by volume		Auto-ignition temperature °F	Probable safe concentration for 8 hr. exposure	Usual mode of entrance to body	Signs and symptoms of poisoning
		Lower	Upper				
antimony (sats)		metal and sulfides flammable			unknown, probably like arsenic	inhalation of dust, ingestion	<i>Acute:</i> vomiting, colic, diarrhea, irritation of mouth and throat. <i>Chronic:</i> ingestion, loss of weight and appetite, sometimes severe dermatitis.
arsenic					0.15 mg/cu m. ⁴	inhalation of dust, ingestion and direct action on skin and mucous membrane	Irritation of skin, loss of hair and nails, perforation of nasal septum, hoarse voice, cough, neuralgic pains, diarrhea.
arsine					1 p.p.m. ⁴	inhalation	Headache, nausea, vomiting, chills and shivering, jaundice, dark or bloody urine.
asbestos		non flammable			5 million particles per cubic foot ¹	inhalation	<i>Chronic:</i> shortness of breath, as- bestososis.
barium (compounds)		peroxide, chlorate, and nitrate produce violent combustion in flammable materials			none adopted	inhalation or ingestion of soluble salts, direct action on skin	Severe dermatitis from the caustic salts, vomiting, dyspnea, abdom- inal pain, cyanosis, paralysis.
benzene (hexad)	12	1.5	8	1000	100 p.p.m. ⁴	inhalation	<i>Chronic:</i> weakness, fatigue, bleed- ing from the gums and nose, head- ache, dizziness. <i>Acute:</i> inebriation, convulsions, and loss of consciousness.
bromine					1 p.p.m. ⁴	inhalation direct attack on skin and mu- cous membranes	Irritation of eyes and respiratory tract, irritation and corrosion of skin, probable lung irritation in acute cases.

TABLE OF CHEMICAL HAZARDS

283

PART XIII

INDUSTRIAL HYGIENE

Plant facilities: comfort ventilation . . . common ventilation methods . . . industrial illumination	pp. 441-448
sanitary facilities . . . eating facilities (education of employees, food handling, contamination, dishwashing)	pp. 448-453
Plant services: medical service quarters . . . physical examinations . . . personnel and supplies	pp. 453-457
Occupational diseases: environmental diseases . . . infections of occupation	pp. 457-460
Industrial poisons: metals and other organic substances . . . radio-active elements . . . metalloids . . . non-metals	pp. 460-463
gases . . . organic compounds . . . aromatic compounds	pp. 463-466
Industrial skin diseases:	pp. 466-467
Principles of industrial disease control: substitution . . . isolation . . . process revision . . . general exhaust ventilation . . . local exhaust ventilation	pp. 467-472
Table XIII-C. Minimum Standards of Illumination.	pp. 472-477

Plant Facilities

Factors in comfort ventilation*

The comfort, health and efficiency of industrial workers depends, as it does with all of us, upon the condition of the air breathed. Industry is repaid amply by increased production and improved morale of workers for the investment made in proper ventilation of workrooms.

After being confined in work places, air undergoes certain physical and chemical changes which may make it unpleasant or unhealthful. These changes usually include:

- An increase of carbon dioxide
- A decrease of oxygen
- An addition of bacteria
- An addition of odors
- An addition of objectionable dust, fumes, gases or vapors

An increase in temperature

An increase or decrease of moisture

Carbon dioxide. The exhaled air contains approximately 100 times more carbon dioxide than does the air breathed into the lungs. This may increase the carbon dioxide content of the room atmosphere, but is of little or no importance from a ventilation point of view, due to the fact that room air is diluted by air leakage from the outside through structural cracks and crevices.

Oxygen. The air breathed into the lungs contains more than 20 per cent oxygen, but the air exhaled contains little more than 15 per cent of this gas, producing a continuous decrease of oxygen in the room air. However, it has been determined that the oxygen content of the room air must be reduced to 15 per cent before any ill effects will be noted.

Inasmuch as the average breath contains only 20 cubic inches of air, it is improbable that the oxygen content of the air in any

*For the engineering aspects of general ventilation and of exhaust ventilation control systems, see Part I "Design and Layout" and the section on local exhaust ventilation in this Part. See References also.

in suspected cases of poisoning from exposure to zinc, these other toxic elements should not be overlooked.

The only significant physiological effect of zinc appears to be metal fume fever. Although of transient character the fever, chills and sweating may be sufficiently severe to cause disability of one or two days duration. The salts of this metal have an irritant effect on the skin.

Zirconium. No evidence of poisoning due to this metal has been reported. There are, however, certain fire and explosion hazards associated with the handling of the powdered metal and its hydride.

Industrial poisons (Radio-active elements)

Radium, thorium, uranium, radon, x-ray
(See section on radiation, Page 459.)

Industrial poisons (Metalloids)

Antimony. The action of antimony is similar to that of arsenic and lead, but not so severe. Antimony can be very irritating to the skin and mucous membranes. Systemically, it resembles lead in its gastro-intestinal effects, but it usually causes diarrhea instead of constipation. In suspicious cases both lead and arsenic must be ruled out.

Arsenic. A frequent industrial health hazard results from the arsenic sulfide contamination of the ores of heavy metals. Arsenic compounds also have wide application in a number of industries. Whenever contact with acid occurs, there is a possibility of arsine being formed.

Such formation is to be guarded against in the cleaning of tank cars which have contained concentrated hydrochloric or sulfuric acid. Arsine is extremely poisonous, completely destroying the red blood cells in a relatively short time.

Manganese. The most frequent source of manganese poisoning is in ore handling, especially in the dusty operations of separation and grinding. Disturbances of the central nervous system similar to those of paralysis agitans occur, progressing from general muscular weakness, tremors of the extremities, spasticity, emotional upsets, speech peculiarity, mask-like expression, and ultimately complete disability.

Phosphorus. Formerly frequent in the match and fireworks industry, horribly dis-

figuring phosphorus poisoning is now seldom seen. It has been eliminated by change from the poisonous white form to the innocuous red phosphorus. The poisoning is always chronic.

Exposure to phosphine (phosphorus hydride) may occur rarely in pickling operations and in the manufacture of ferrocen. This gas causes respiratory and gastro-intestinal disturbances, general weakness and, if the exposure is great, convulsions.

Selenium. Of increasing industrial application, selenium and its soluble compounds are systemic poisons and irritants to the skin and mucous membranes.

Tellurium is similar to selenium in its effects and symptoms.

Industrial poisons (Non-metals)

Boron. Compounds of boron are toxic, but no industrial poisoning has been reported.

Carbon disulfide, a widely used solvent, is a strong nerve poison if absorbed continuously.

Chromium. Chromic acid, chromate and dichromate salts are extremely irritating to the skin, eyes and all mucous membranes.

Silicon. The dioxide, so-called "free silica," is the cause of a fibrotic disease of the lungs which, if it progresses, eventually limit the respiratory function.

Exposure for long periods (many years) to excessive concentrations of free silica are followed by the characteristic symptoms of this lung disease. Tuberculosis frequently follows. *Asthma* causes a similar disability.

Sulfur is not a cause of industrial poisoning, but it may produce skin irritation. Some of its compounds, for example *hydrogen sulfide*, are extremely toxic. It is not only irritating, especially to the eyes, but it has a marked systemic effect in producing paralysis of the respiratory center.

Hydrogen sulfide may be produced in many industries where sulphur-containing compounds, especially sulfides, come in contact with dilute acids. *Sulfur dioxide* is a common result of gas and coal combustion. It has the irritant action of all the acid gases on the respiratory tract.

sol-
t by the
form to
the poi-

ous hy-
g opera-
erosili-
ry and
eralized
sat, con-

dial ap-
e com-
ritating
in its

toxic,
an re-
olvent,
d con-

and
itating
mem-

"free
ase of
will
ion,
sually
finely
res of
acter
Tu-
estor

l poi-
ation,
upic,
It
eyes,
pro-
nter,
d in
ininc
in
te, a
n,
as

Titanium, tungsten, molybdenum, germanium. No cases of poisoning due to these elements, used in the steel industry, have been reported. The chlorides hydrolyze to produce acids which are irritating.

Industrial poisons (Gases)

Oxygen. Atmospheres extremely rich in oxygen are unlikely to occur industrially, but it has been shown that prolonged exposure to high concentrations are irritating to the respiratory tract. Nascent oxygen, in the form of *ozone*, is also an irritant.

Hydrogen is inactive physiologically and is of interest only because of its explosive nature. In its evolution from plating baths it may act, by means of small bubbles, as a carrier for toxic or irritating substances.

Nitrogen, used occasionally in industry as an inert gas to prevent explosive mixtures, may displace oxygen to a dangerous extent. In those who work under increased atmospheric pressure, nitrogen, because of its physiological inertness, may cause severe damage when released from the tissues. Nitrogen's hydride, *ammonia*, is extremely irritating to the eyes and the respiratory tract.

The toxic oxides of nitrogen have become important because of their formation during the high temperatures of welding operations. Whenever nitric acid is used, the formation of these gases should be considered. They act as acids, irritating the respiratory tract so severely that pulmonary edema and pneumonia may result. *Nitric oxide* exerts its action by the oxidation of hemoglobin to methemoglobin with resultant loss of oxygen transport.

Of the nitrogen-containing salts, the nitrates and nitrites cause physiological disturbances. The *cyanides*, which are included here because of their nitrogen content, are widely used in plating and metal treating. They are extremely toxic, especially in contact with acid, when they form *hydrogen cyanide*. *Cyanogen*, used for fumigation, is also dangerous.

Acid gases (chlorine, bromine, iodine, hydrogen fluoride, hydrogen chloride, sulfur dioxide, hydrogen sulfide, oxides of nitrogen and phosgene) have in some instances been referred to elsewhere in the manual.*

*See Part VII "Chemical Hazards."

Some, like hydrogen sulfide, may have other than local irritant actions (see above).

The effects of these gases depends to a large degree upon the site of irritation and this, in turn, is determined by the solubility of the gases in water. Those with a high solubility exert their greatest effect in the upper respiratory passages. Those with a lower solubility, and those, like *phosgene*, which hydrolyze to form acids, reach the deeper portions of the lungs and bronchi.

As a rule, the results of exposure to this latter type are more severe; for no early irritation occurs to give warning. The insidious, delayed effects may end in pulmonary edema, pneumonia, and death. This effect is also true of a larger number of organic compounds of comparable character.

Helium (also other rare gases). Not significant toxicologically, helium is now of value for supplying to divers a mixture with oxygen to prevent compressed-air illness. (See "increased atmospheric pressure," Page 459.) This mixture eliminates the effects due to nitrogen, which is soluble in body tissues.

Carbon monoxide. The most common cause of gas poisoning, carbon monoxide is not only encountered in practically every industry, but also in everyday life. It acts as an asphyxiant by forming a stable compound with hemoglobin, thus preventing transport of oxygen by the blood.

Acute poisoning is the most frequent form, but signs of chronic exposure are recognized. The dioxide of carbon may displace air and thus produce asphyxia. It is a powerful respiratory stimulant and may produce disturbing physiological effects when excessive concentrations are present in the inspired air.

Industrial poisons (Organic compounds)

Aliphatic hydrocarbons. Of this group, the compounds most common to industrial use are the *gasolines*, *naphthas*, *benzine*, *kerosene*, *fuel* and *lubricating oils*. They have wide application, being used as solvents, cleaners, degreasers and as vehicles in paints.

Their vapors will produce headache, dizziness, nausea, vomiting, stupor and unconsciousness. They act as irritants to the skin and are common causes of industrial